# Contessa Lighting SUPERIOR LIGHTING SOLUTIONS

Bespoke Lighting Solutions
SINCE 1946

### Contessa Lighting Superior Lighting Solutions





Contessa Lighting is a dynamic company that embraces innovative and unique lighting design. Founded in 1946 and located south of Sydney Australia, we have a long history and true global reach.

Contessa has researched, designed and developed innovative lighting luminaires. We have a long standing international reputation for our bespoke capabilities and 'off the shelf' architectural light fittings. Our consultants are experts in their fields and are actively engaged in the process, whether it be concept design, manufacture or project delivery. 70 years' experience in manufacturing has enabled us to offer finished products of unique design and genuine quality carefully crafted by hand.

We are committed to working in a collaborative environment to find innovative design solutions that provide lasting outcomes. If there are no bespoke designs in this brochure that suit your design plan, please do not hesitate to send our team your lighting concepts for appraisal.

Some of our services include:

- Bespoke lighting research, design & manufacturing
- Material & characteristic selection assistance
- Design to delivery service





































**NEED SOMETHING DIFFERENT?** 





YOU CAN SEND US AN IMAGE OF WHAT YOU REQUIRE AND WE WILL SOURCE IF FOR YOU **WE ALSO MANUFACTURE LIGHTS** 

FROM CONCEPT DRAWINGS

SEND YOUR CONCEPTS TO

SALES@CONTESSALIGHTING.COM.AU







### Nimbus Single



#### **SATURN NIMBUS** Custom LED Luminaire

Saturn Nimbus is available in a selection of diameters and finishes. The finish can be customised per your specifications.

Profile Size: 20mm Wide x 25mm High

Extruded Aluminium Material:

Finishes: Powder coated - Black / White / Silver /

Custom Colour

Electroplated - Enquire for finishes

PMMA Satin Diffuser:

240V - 50Hz Voltage: CRI: +08 IP Rating: IP20

**Light Source:** 

LED boards 3000K, 4000K, 5000K (4000K & 5000K are indent lines) 120°

Beam Angle:

Ambient temp: 0°C ... 45°C

Universal dimming included (450/600/800 only) **Dimming Options:** 

- DALI (Optional)

- DSI (Optional) - SwitchDIM (Optional)


Lumen Package: /diameter


- 450mmØ = 24W 1750 Lm - 600mmØ = 36W 2660 Lm - 800mmØ = 42W 2984 Lm

- 1000mmØ = 60W 3300 Lm - 1200mmØ = 72W 4000 Lm


Mounting:

Wire suspended BTC (back to canopy)
 Wire suspended DTC (direct to ceiling) (DTC requires remote driver)



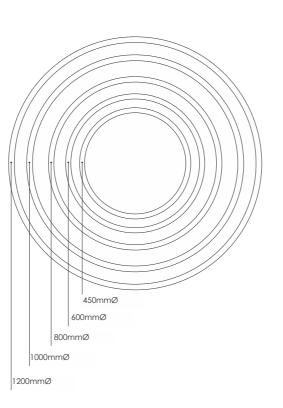



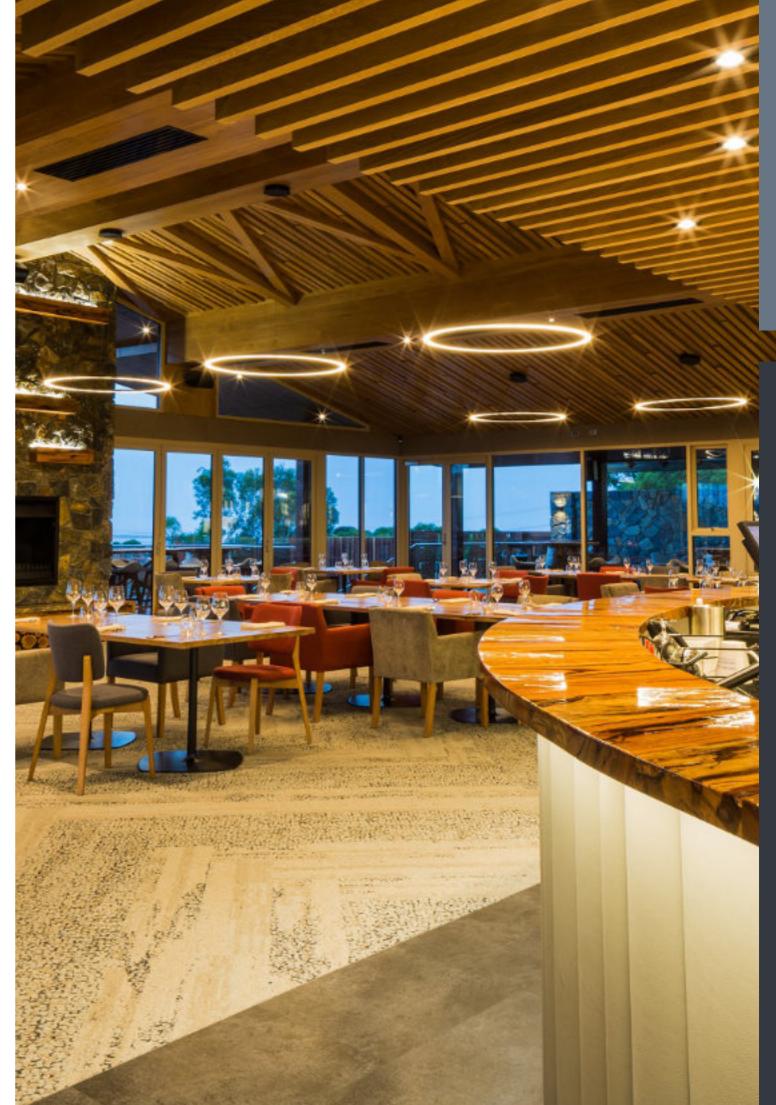

### Nimbus Tiered



### SATURN NIMBUS TIERED Custom LED Luminaire

The Saturn Nimbus single diameters can be paired with each other to create fittings with two tiers up to five tiers. The finish can be customised per your specifications.

Profile Size: 20mm W x 25mm H

Diameters: 450, 600, 800, 1000, 1200 (mm)

Material: Extruded Aluminium

Finishes: Powder coated - Black / White / Silver /

Custom Colour Electroplated - Enquire for finishes

Diffuser: PMMA Satin

Voltage: 240V - 50Hz +08

IP Rating: IP20 Light Source:

LED boards 3000K, 4000K, 5000K (4000K & 5000K are indent lines) CCT:

Beam Angle:

0°C ... 45°C Ambient temp:

**Dimming Options:** Universal dimming included (450/600, 600/800

- DALI (Optional) - DSI (Optional) - SwitchDIM (Optional)

Lumen Package: /Fitting

- Join the lumen outputs of each individual tier

(For lumen outputs, check the previous page)

Mounting:

- Wire suspended BTC (back to canopy)

Wire suspended DTC (direct to ceiling)
 (DTC requires remote driver)

4 Tier

5 Tier





### Convex



### **SATURN CONVEX** Custom LED Luminaire

The Saturn Convex is a rounded end rectangle pendant that utilizes the same profile as the Nimbus range. The finish can be customised per your specifications.

Profile Size: 20mm Wide x 25mm High

Material: Extruded Aluminium

Finishes: Powder coated - Black / White / Silver /

Custom Colour

Electroplated - Enquire for finishes

Diffuser: PMMA Satin

240V - 50Hz Voltage: CRI: +08 IP Rating: IP20

LED boards 3000K, 4000K, 5000K Light Source: CCT:

(4000K & 5000K are indent lines)

Beam Angle:

0°C ... 45°C Ambient temp:

**Dimming Options:** 1-10 Volt dimming included

- DALI (Optional) - DSI (Optional)

- SwitchDIM (Optional)


Lumen Package: /Unit


- 1500mm = 60W 4800 Lm

Mounting:


Wire suspended BTC (back to canopy)Wire suspended DTC (direct to ceiling)

(DTC requires remote driver)



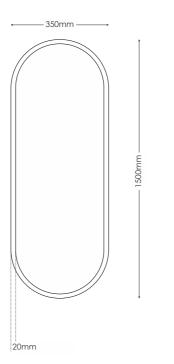



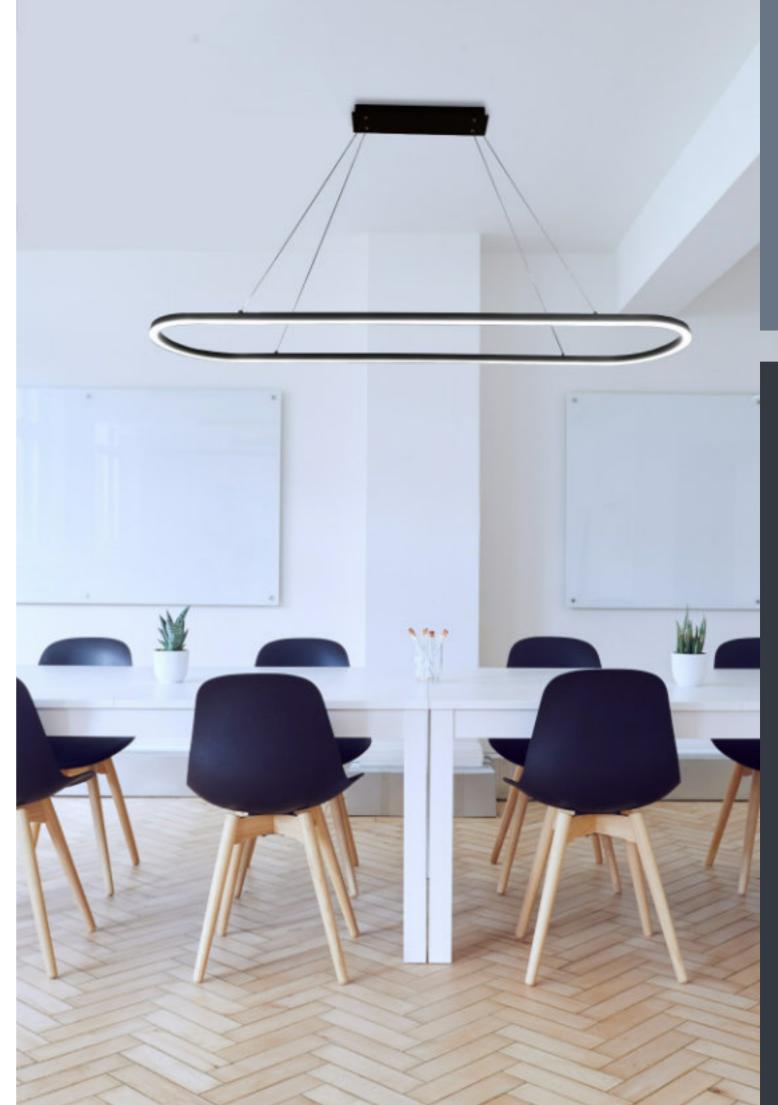

### Convex C60



### **SATURN CONVEX C60** Bespoke LED Luminaire

The Saturn Convex C60 pendant can be made to your specifications including profile size, length, width and finish.

(B Section 200mm)

**Profile Size Options A:** 60mm W x 70mm H (Standard)

60mm W x 100mm H 100mm W x 110mm H

Pendant Width (W): 600, 750, 1000, 1200, 1500, 2500 (mm)

Material: Aluminium + PC

Powder coated - Black / White / Silver / Finishes:

Custom Colour

Electroplated - Enquire for finishes

Diffuser: PC - Opal

Voltage: 240V - 50Hz CRI: +08

IP Rating: IP20

Light Source: LED boards 3000K, 4000K, 5000K CCT:

120° Beam Angle:

0°C ... 45°C Ambient temp:

**Dimming Options:** Included (options below)

- DALI - 1-10 Volt

Lumen Package:

/Length (Based off standard 60x70mm profile)

- 2000mm = 160W 14400 Lm - 3000mm = 220W 19800 Lm - 4000mm = 280W 25200 Lm - 5000mm = 340W 30600 Lm


- 6000mm = 400W 36000 Lm - 7000mm = 460W 41400 Lm


- Lumen package will change for custom lengths


Mounting:

- Wire suspended DTC (direct to ceiling)


- Rod Suspended (Requires remote driver)









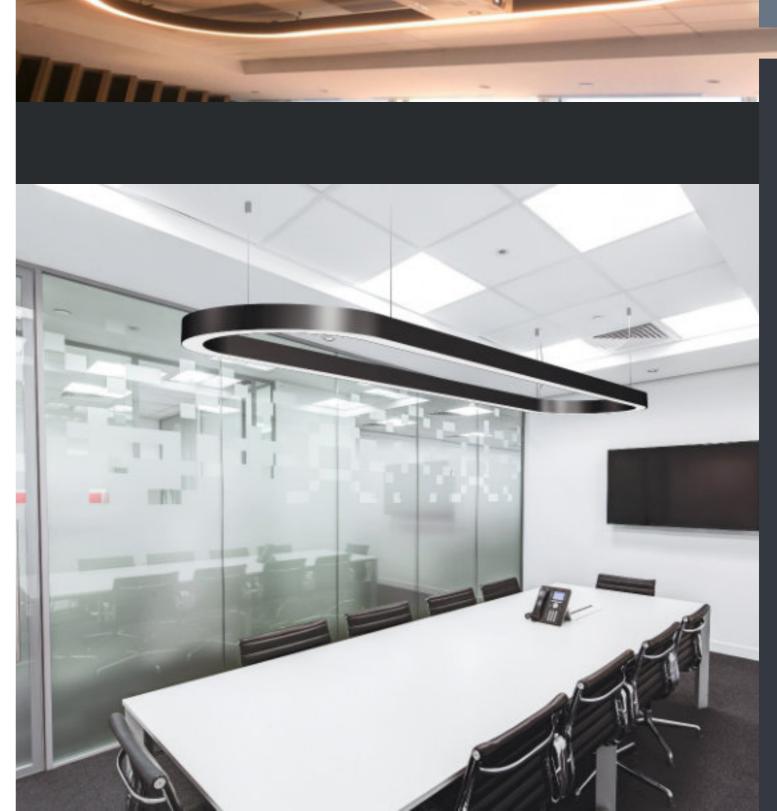

### Ring 100



### SATURN RING 100 Custom LED Luminaire

Saturn Ring is available in a selection of diameters and finishes. The finish can be customised per your specifications.

Profile Size: 100mm Wide x 110mm High

450, 600, 750, 900, 1200 (mm) Diameter:

Material: Extruded Aluminium

Finishes: Powder coated - Black / White / Silver /

Custom Colour

Electroplated - Enquire for finishes

Diffuser: PMMA Satin

Voltage: 240V - 50Hz +08 CRI: IP Rating: IP20 Light Source: LED boards

3000K, 4000K, 5000K (4000K & 5000K are indent lines) CCT:

120° Beam Angle: 0°C ... 45°C Ambient temp:

**Dimming Options:** 1-10 Volt dimming included

- DALI (Optional) - DSI (Optional) - SwitchDIM (Optional)

Lumen Package:

/diameter - 450mmØ = 30W 2715 Lm - 600mmØ = 40W 3620Lm - 750mmØ = 62W 5456 Lm - 900mmØ = 72W 6336 Lm


- 1200mmØ = 92W 8096 Lm


Mounting:

- Wire suspended BTC (back to canopy) - Wire suspended DTC (direct to ceiling)

- Rod Suspended (Requires remote driver)

- Surface Mounted - Recess Mounted



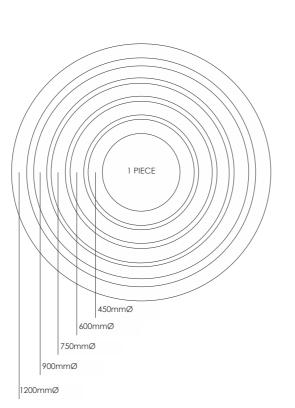





## Ring 60



### **SATURN RING 60** Custom LED Luminaire

Saturn Ring 60 is a fully customisable pendant. This pendant is available in a selection of diameters and lumen outputs. The finish can also be customised per your specification.

60mm W x 70mm H (Standard) 60mm W x 100mm H Profile Size Options:

660, 860, 1060, 1260, 1560, 2060, 2460, 3060, 4060, 5000 (mm) Diameter:

(Based of 60x70)

Material: Aluminium + PC

Finishes: Powder coated - Black / White / Silver /

Custom Colour

Electroplated - Enquire for finishes

PC - Opal Diffuser:

240V - 50Hz 80+ Voltage: CRI: IP Rating: IP20

LED boards Light Source: 3000K, 4000K, 5000K CCT:

Beam Angle: 120° Ambient temp: 0°C ... 45°C

**Dimming Options:** Optional. - DALI

- DSI - SwitchDIM

Lumen Package: /diameter

- 660mmØ = 38W 3420 Lm - 860mmØ = 50W 4500 Lm (Based off standard - 1060mmØ = 63W 5670 Lm 60x70mm profile)


- 1260mmØ = 75W 6750 Lm - 1560mmØ = 94W 8460 Lm


- 2060mmØ = 126W 11340 Lm - 2460mmØ = 151W 13590 Lm - 3060mmØ = 188W 16920 Lm -5000mmØ = 314W 28260 Lm

Mounting:


- Wire suspended DTC (direct to ceiling)

- Rod suspended



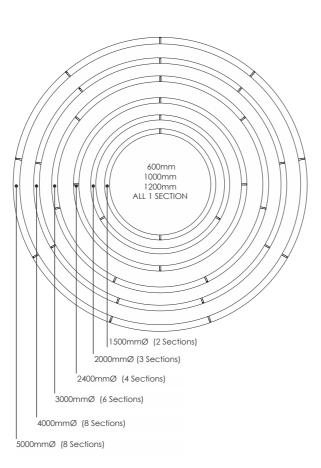



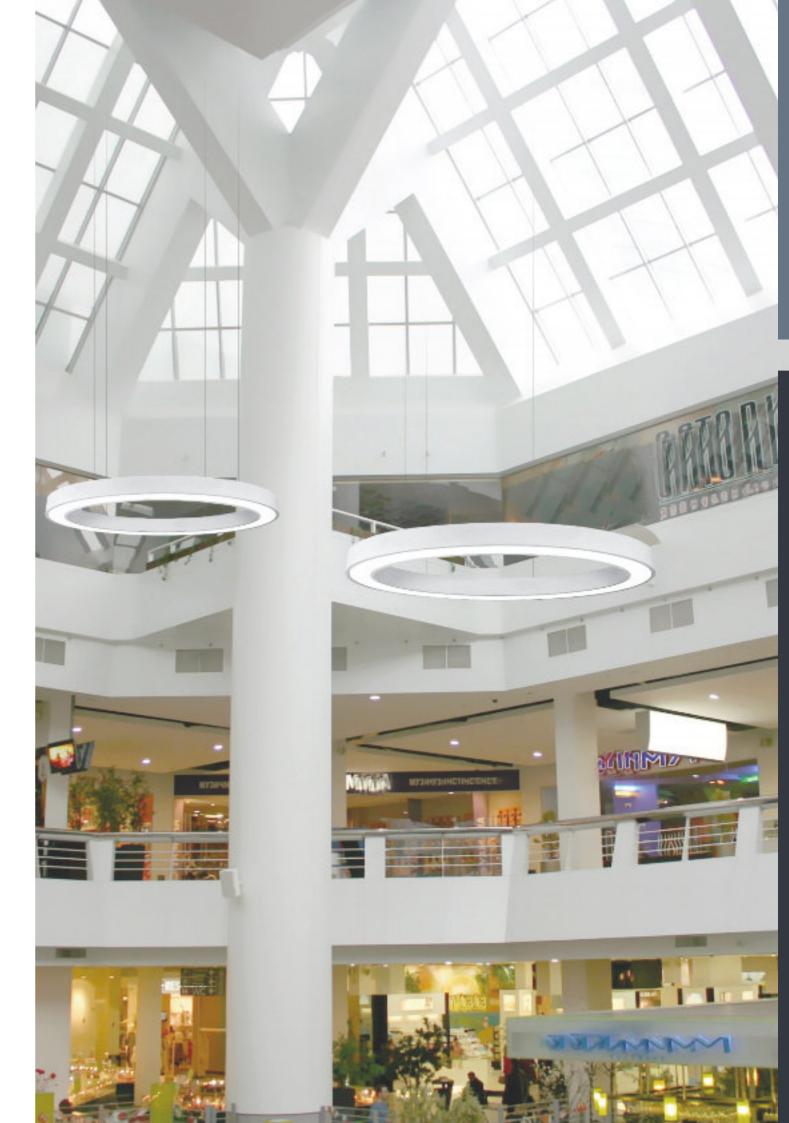



### **SATURN SUN** Custom LED Luminaire

Saturn Sun is available in a selection of diameters and finishes. The finish can be customised per your specifications.

Profile Size: 110mm High x Ø 450, 600, 750, 900 or 1200mm

Extruded Aluminium Material:

Finishes: Powder coated - Black / White / Silver /

Custom Colour

Electroplated - Enquire for finishes

PMMA Satin Diffuser:

Voltage: 240V - 50Hz 80+ IP20 CRI: IP Rating:

Light Source: LED boards CCT: 3000K, 4000K, 5000K

120° Beam Angle:

0°C ... 45°C Ambient temp:

**Dimming Options:** 


1-10 Volt dimming included - DALI (Optional) - DSI (Optional) - SwitchDIM (Optional)


Lumen Package: /diameter

- 450mmØ = 40W 4021 Lm - 600mmØ = 50W 5011Lm - 750mmØ = 72W 7456 Lm - 900mmØ = 98W 9898 Lm - 1200mmØ = 147W 14847 Lm

### Mounting:

- Wire suspended BTC (back to canopy)Wire suspended DTC (direct to ceiling)
- (DTC requires remote driver) - Rod Suspended (Requires remote driver)
- Surface Mounted
- Recess Mounted

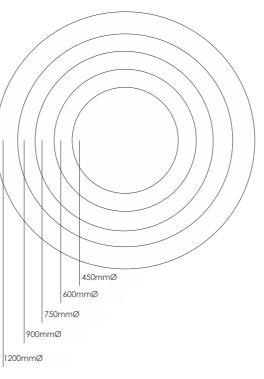

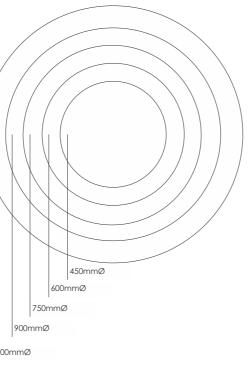





### Contour System





### **LED CONTOUR SYSTEM** Custom LED Luminaire

Contour System is an aluminium linear lighting system with curved angles as well as straight T sections, L sections and Y sections

Profile Size: 60mm W x 80mm H (Standard)

60mm W x 100mm H

Material: Aluminium

Finishes: Powder coated - Black / White / Silver /

Custom Colour

Electroplated - Enquire for finishes

PC - Opal Diffuser:

240V - 50Hz Voltage: CRI: 80+ (90+ available)

IP Rating: IP20

LED boards Light Source:

3000K, 4000K, 5000K CCT:

Tunable white (2700K to 6500K) on selected

configurations only

Up to 170 Lm/W Luminous efficacy:

0°C ... 45°C Ambient temp:

**Dimming Options:** Included (select option below) - DSI

- DALI

- SwitchDIM

Lumen Packages:

- 17W 2645 Lm/M

- 21W 3759 Lm/M

- 25W 4367 Lm/M


- 33W 5289 Lm/M

Lumen packages can be adjusted/changed to client requirements.


Mounting:

- Wire suspended

- Rod suspended






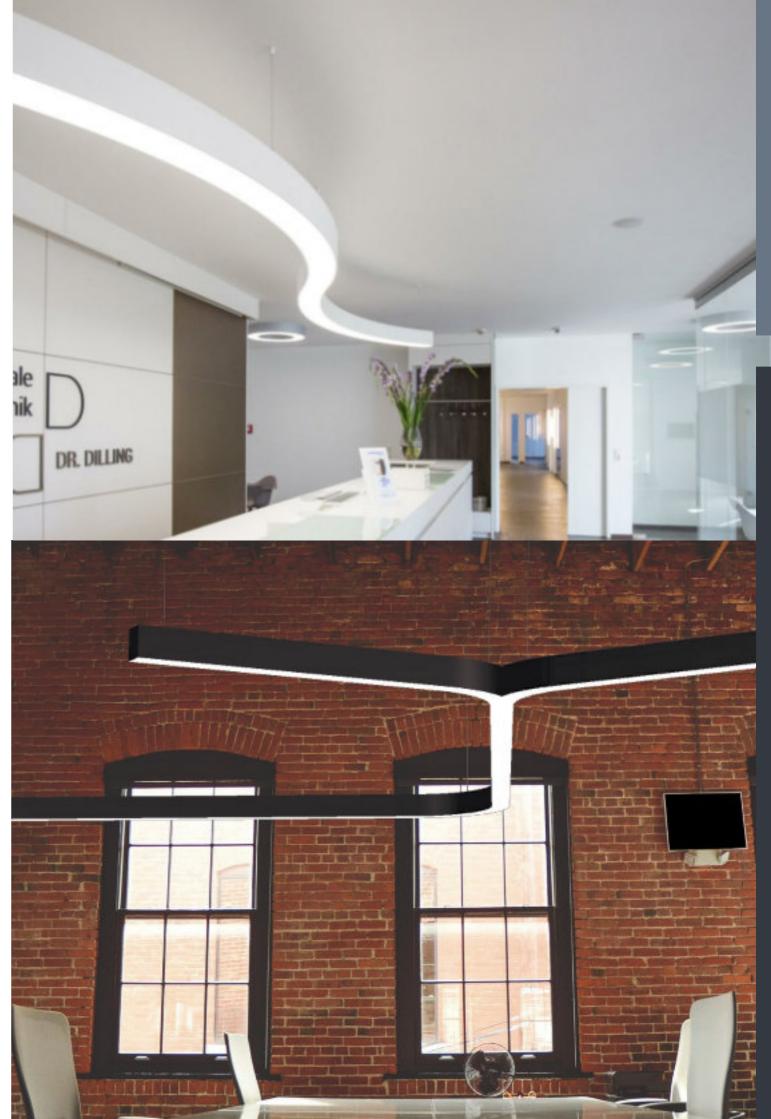


### Contour System

22

| LED CONTOUR SYSTEM Curves |                          |                 |           |
|---------------------------|--------------------------|-----------------|-----------|
|                           | eated from a 600mm diame |                 |           |
| Corves nonnaiger dian     | melers can be mandacided | a opon request. |           |
|                           | $\wedge$                 |                 |           |
| $\nearrow$                |                          |                 |           |
|                           |                          |                 |           |
| 30° Curve                 | 45° Curve                | 60° Curve       | 90° Curve |
|                           |                          |                 |           |
|                           |                          |                 |           |
|                           |                          |                 |           |
|                           |                          |                 |           |

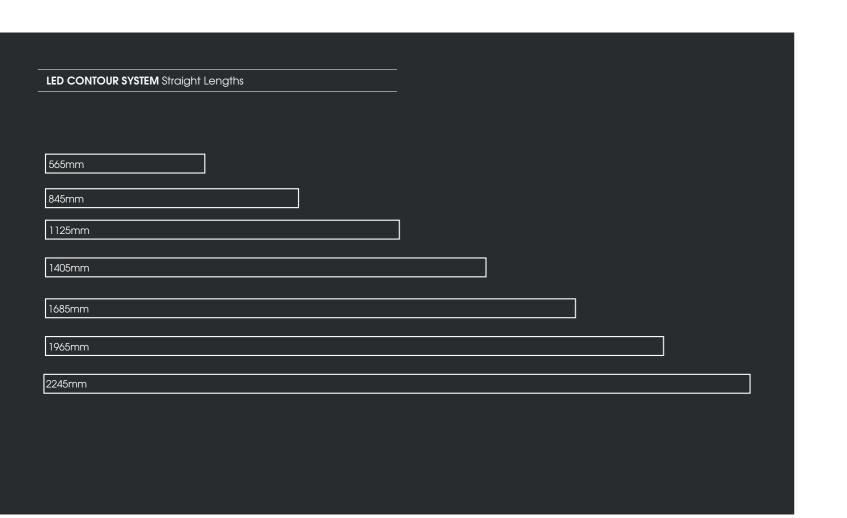

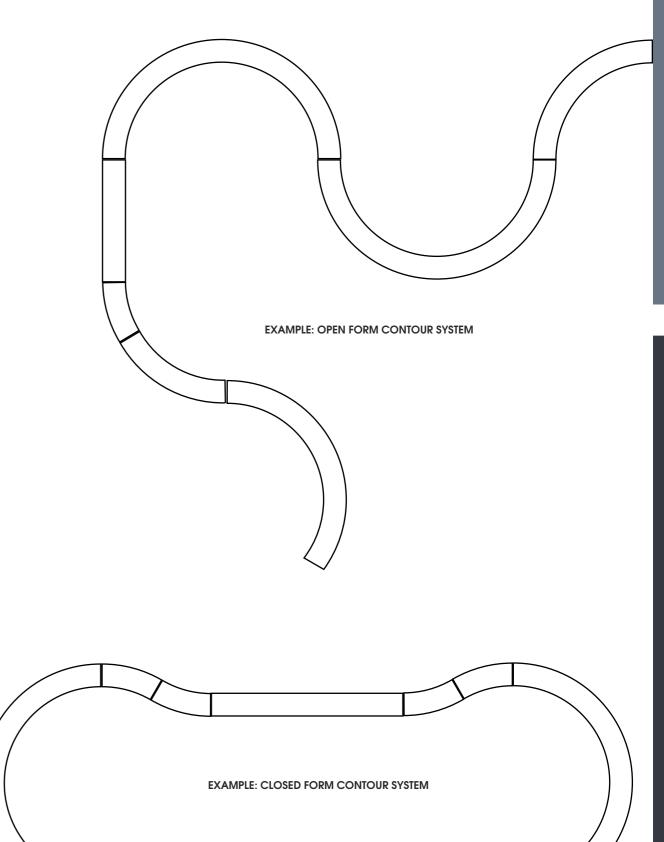

### Straight System





### LINEAR STRAIGHT SYSTEM Custom LED Luminaire

Linear Straight profiles can be manufactured as stand alone pendants or as a complete system incorporating straight L, T & X junctions.

Selected straight profiles feature no light leakage at the straight joins.

70mm W x 80mm H (Standard) 50mm W x 75mm H Profile Size:

75mm W x 75mm H 100mm W x 75mm H 80mm W x 90mm H

Material: Extruded Aluminium + PC

Powder coated - Black / White / Silver / Finishes:

Custom Colour

Electroplated - Enquire for finishes

Diffuser: PC - Opal

Voltage: 240V - 50Hz CRI: 80+ (90+ available)

IP Rating:

Light Source: LED boards

3000K, 4000K, 5000K Tunable white (2700K to 6500K) on selected configurations only

Up to 170 Lm/W

Luminous efficacy: Ambient temp: 0°C ... 45°C

**Dimming Options:** Included - DALI

- DSI - SwitchDIM


Lumen Packages:

- 17W 2645 Lm/M - 21W 3759 Lm/M - 25W 4367 Lm/M - 33W 5289 Lm/M

Lumen packages can be adjusted/changed to client requirements.

Mounting:

- Wire suspended - Rod suspended - Surface mounted













### Straight System

LINEAR STRAIGHT SYSTEM Junctions



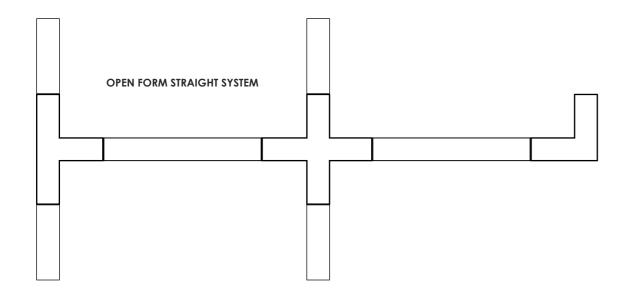

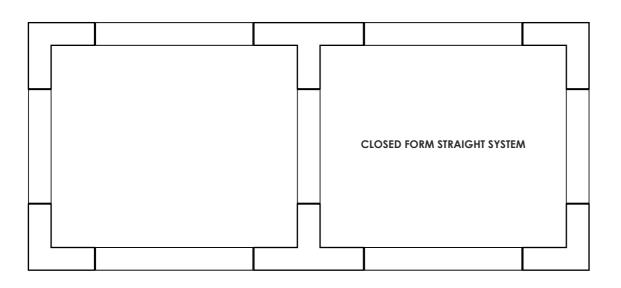

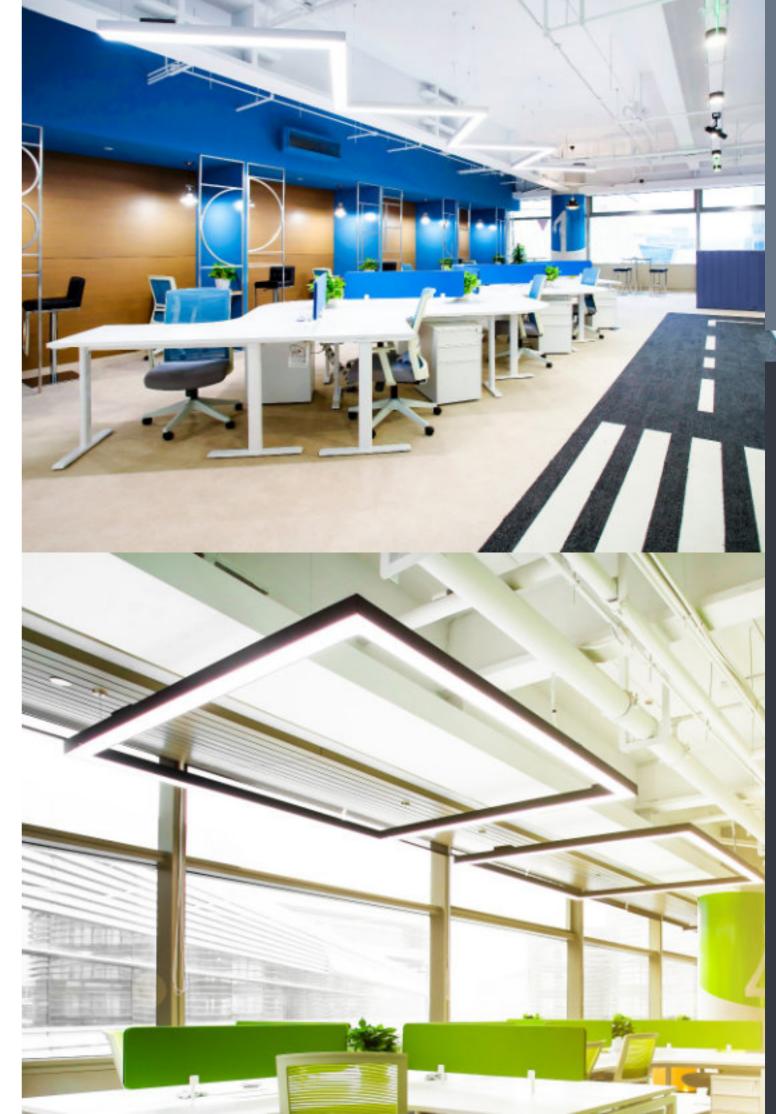

# Solid



### **SOLID PENDANT** Custom LED Luminaire

The Solid Pendant is a bespoke Australian Made light fitting. Made out of solid Australian Blackbutt or Tasmania Oak timber, this pendant can be customised including the length, timber type and finish.

Profile Size: 30mm W x 90mm H

Length: 2400, 1800 or 1200mm (custom for 10+)

Wood, aluminium, PC Materials:

Finish Options: Clear satin

Whitewash Japanese black

Diffuser: Opal PC

240V - 50Hz Input 24V output >80 Voltage:

CRI: IP Rating: IP20

Light Source: CCT:

LED flex 3000K, 4000K, 6500K

120° Beam Angle:

0°C ... 45°C Ambient temp:

**Dimming Options:** Universal dimming

DALI DSI

SwitchDIM


Lumen Package: /Length

- 1200mm = 14.4W 2160 Lm - 1800mm = 21.6W 3240 Lm - 2400mm = 28.8W 4320 Lm

Mounting:

- Wire suspended BTC (back to canopy)

- Rod Suspension

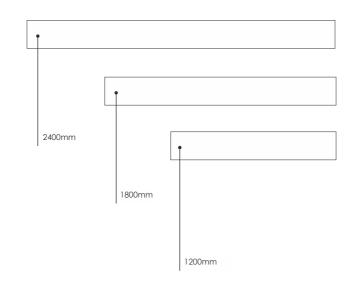







### **SOLID WALL** Custom LED Luminaire

The Solid Wall Light is a bespoke Australian Made light fitting. Made out of solid Australian Blackbutt or Tasmanian Oak timber, this wall light can be customised including the timber type, output and finish.

**Profile Size:** 300mm W x 65mm D x 140mm H

Materials: Wood, aluminium, PC

Finish Options: Clear satin

Whitewash Japanese black

**Diffuser:** Opal PC

**Voltage:** 240V - 50Hz Input

 CRI:
 >80

 IP Rating:
 IP20

 Light Source:
 LED board

 CCT:
 3000K

CCT: 3000K

Beam Angle: 120°

Ambient temp: 0°C ... 45°C

**Dimming Options:** Universal dimming included

DALI DSI


SwitchDIM

Lumen Package:


**/Fixture** - 300mm = 11W 1396 Lm

Mounting:







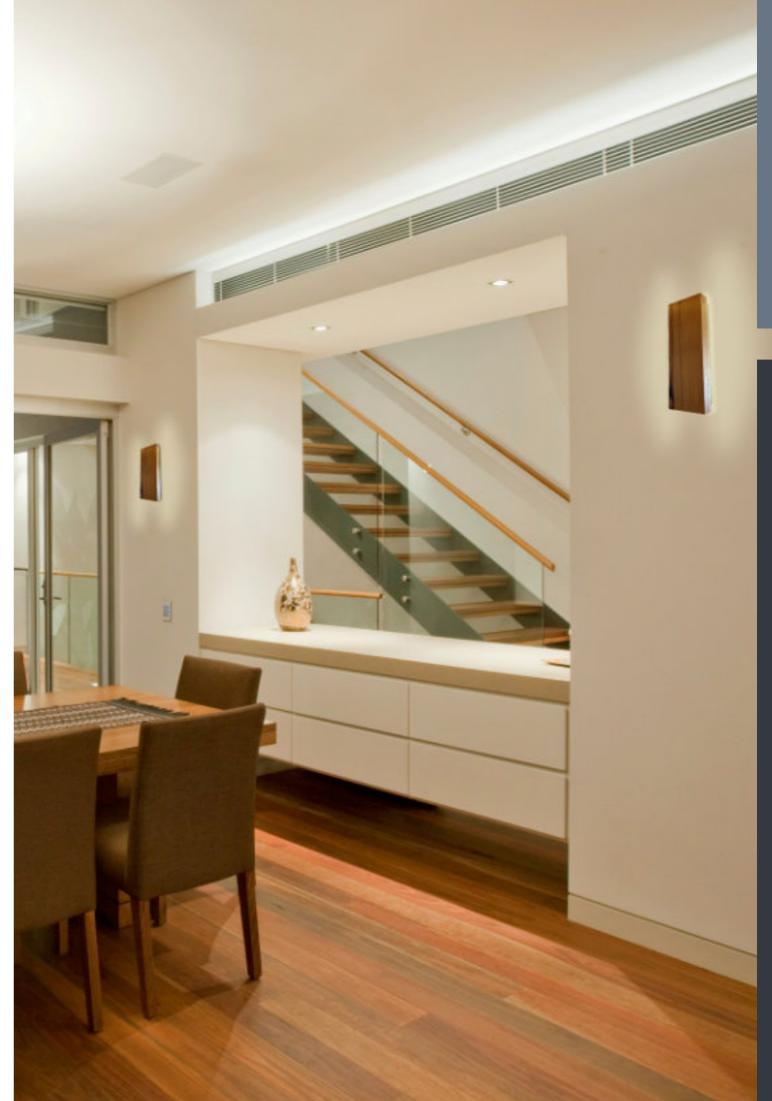

## Tube





### **TUBE** Custom LED Luminaire

The Tube Pendant is a bespoke Australian Made light fitting. This pendant can be customised using selected tube diameters, custom tube lengths and finishes.

Dimensions:

75 or 100 Ø x 350mm H 75 or 100 Ø x 500mm H 75 or 100 Ø x 700mm H or custom height.

Materials: Steel

Finish Options: Black

White

Custom powder coat

Not applicable Diffuser:

240V - 50Hz Voltage: >80 IP20 LED Globe 3000K, 4000K, 5000K CRI: IP Rating:

Light Source: CCT:

Beam Angle: Ambient temp: 120°

0°C ... 45°C

**Dimming Optional:** 

Lumen Package: /Fixture

- 350mm = 10W 950 Lm - 500mm = 10W 950 Lm


Universal dimming optional

- 700mm = 10W 950 Lm

Mounting:

- Wire suspended BTC (back to canopy)

- Rod Suspension

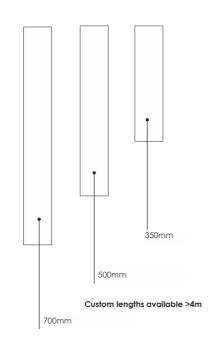





## Dome





### **DOME** Custom LED Luminaire

The Dome Pendant is a bespoke Australian Made light fitting. This pendant can be customised to selected sizes, finishes, lumen outputs and suspension lengths.

500 Ø x 285mm H 600 Ø x 300mm H Dimensions:

750 Ø x 375mm H 1000 Ø x 500mm H

Materials: Steel

Finish Options: Black White

Custom powder coat

Not applicable Diffuser:

240V - 50Hz Voltage: CRI: >80 IP20 LED light hub IP Rating: Light Source:

3000K, 4000K, 5000K CCT: Beam Angle: 120°

Dimming Optional: Universal dimming optional

Lumen Package: /Fixture

Ambient temp:

- 500mm = 10W 950 Lm - 600mm = 10W 950 Lm - 750mm = 30W 2850 Lm


0°C ... 45°C

- 1000mm = 30W 2850 Lm

Mounting:

- Wire suspended BTC (back to canopy)

- Rod Suspension







# Lightbox





### **LIGHTBOX** Custom LED Luminaire

The Lightbox is a bespoke Australian Made light fitting. Every feature of this pendant can be customised including the size, finish, lumen output and suspension length.

600 W x 600 D x 250mm H 700 W x 700 D x 300mm H Dimensions:

900 W x 900 D x 350mm H 1100 W x 1100 D x 400mm H

Materials: Steel, acrylic

Texture Black Texture White Finish Options:

Custom powder coat

Opal acrylic - matt or gloss Diffuser:

240V - 50Hz Voltage: CRI: >80 IP20 LED panel IP Rating:

Light Source:

3000K, 4000K, 5000K CCT:

Beam Angle: 180°

0°C ... 45°C Ambient temp:

Dimming Optional: Universal dimming Inlauded

Lumen Package:

/Fixture - 600mm = 35W 2700 Lm - 700mm = 36W 3000 Lm - 900mm = 36W 3000 Lm

- 1100mm = 36W 3000 Lm


Mounting:

- Wire suspended BTC (back to canopy) - Wire suspended DTC (direct to ceiling)

- Surface Mounted

W TOP VIEW



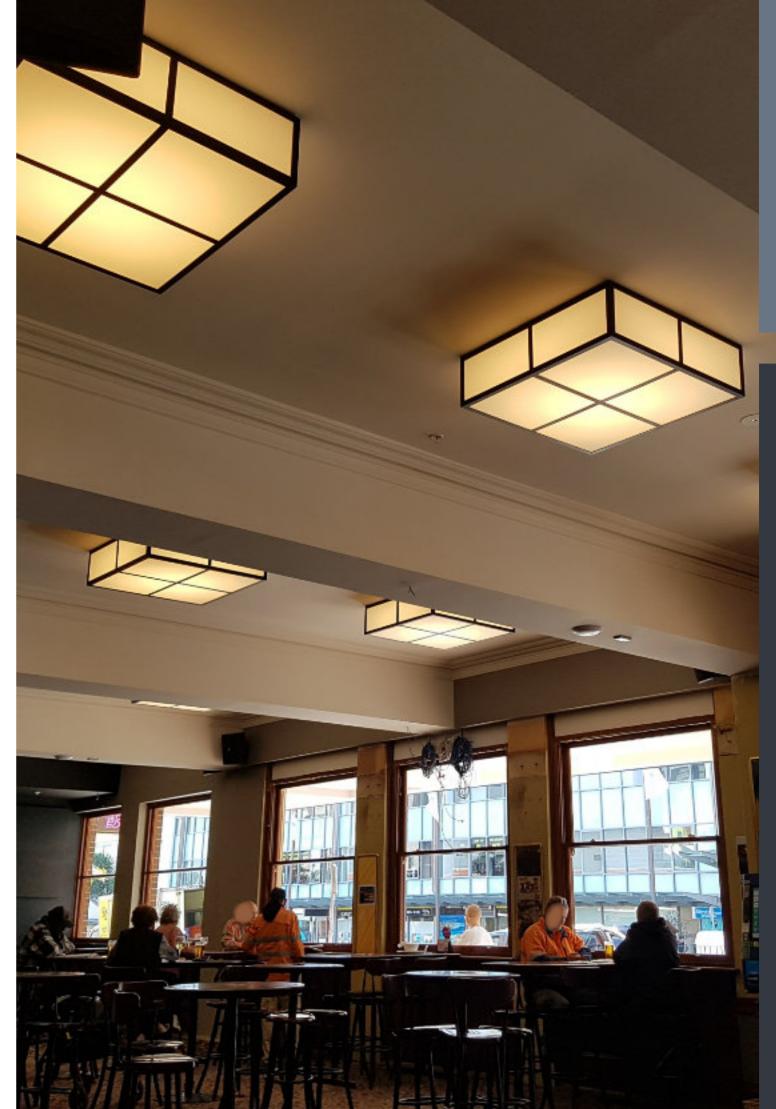

## Vintage





### **SATURN VINTAGE** Custom LED Luminaire

The Saturn Vintage is a bespoke Australian Made light fitting. This pendant can be customised to selected shapes, sizes, finishes, lumen outputs and suspension lengths.

Profile Size: 20mm W x 25mm H

Diameters ( $\emptyset$ ): 450, 600, 800, 1000 (mm)

Material: Extruded Aluminium + PC

Finishes: Powder coated - Black / White / Silver /

Custom Colour
Electroplated - Enquire for finishes

240V - 50Hz Voltage: CRI: >80 IP Rating: IP20 LED Lamps 2700k, 5000k Light Source: CCT:

270° 0°C ... 45°C Beam Angle: Ambient temp:

Universal dimming optional Dimming Optional:

Lumen Package: /Fixture

- 450mm = 6 x 4W 3000 Lm - 600mm = 8 x 4W 4000 Lm - 800mm = 10 x 4W 2850 Lm


- 1000mm = 14 x 4W 2850 Lm

Mounting:

- Wire suspended BTC (back to canopy)

- Wire suspended DTC (direct to ceiling)

- Rod Suspension







## Drum





### **DRUM** Custom LED Luminaire

The Drum Pendant is a bespoke Australian Made light fitting. Every feature of this pendant can be customised including the size, lining, lumen output and suspension length.

450 Ø x 250mm H 600 Ø x 300mm H Dimensions:

750 Ø x 325mm H 1000 Ø x 350mm H 1200 Ø x 400mm H

Materials: Steel, fabric, acrylic

Contessa designer fabric range Customer specified Finish Options:

Customer supplied

Opal acrylic - matt or gloss Diffuser:

240V - 50Hz Voltage: CRI: IP Rating: IP20

LED light hub 3000K, 4000K, 5000K Light Source: CCT:

Beam Angle:

Ambient temp: 0°C ... 45°C

Dimming Optional: Universal dimming optional

Lumen Package: /Fixture


- 450mm = 9W 850 Lm - 600mm = 27W 2550 Lm - 750mm = 27W 2550 Lm - 1000mm = 36W 3400 Lm - 1200mm = 36W 3400 Lm

Mounting:

- Wire suspended BTC (back to canopy) - Wire suspended DTC (direct to ceiling)

- Rod Suspended

- Surface Mounted



Ø







# Cilindro





### **CILINDRO** Custom LED Luminaire

The Cilindro Pendant is a bespoke Australian Made light fitting. Every feature of this pendant can be customised including the size, lining, lumen output and suspension length.

300 Ø x 500mm H 325 Ø x 600mm H Dimensions: 350 Ø x 750mm H 400 Ø x 1200mm H

Materials: Steel, fabric, acrylic

Contessa designer fabric range Customer specified Finish Options:

Customer supplied

400 Ø x 1800mm H

Opal acrylic - matt or gloss Diffuser:

240V - 50Hz Voltage: IP Rating: IP20

LED vertical bar light 3000K, 4000K, 5000K Light Source: CCT:

Beam Angle: Ambient temp: 0°C ... 45°C

**Dimming Optional:** Universal dimming

> DSI SwitchDIM


Lumen Package: /Fixture height

- 500mm = 19W 2880 Lm - 600mm = 24W 3600 Lm - 750mm = 31W 4680 Lm - 1200mm = 52W 7920 Lm - 1800mm = 82W 12240 Lm

Mounting:

- Wire suspended BTC (back to canopy) - Wire suspended DTC (direct to ceiling)
- Rod Suspended

- Surface Mounted



Ø







## Conic





### **CONIC** Custom LED Luminaire

The Conic Pendant is a bespoke Australian Made light fitting. Every feature of this pendant can be customised including the size, lining, lumen output and suspension length.

550 B x 450 T x 300mm H 600 B x 500 T x 350mm H Dimensions:

800 B x 700 T x 400mm H 1000 B x 600 T x 600mm H 1500 B x 1200 T x 600mm H

Materials: Steel, fabric, acrylic

Contessa designer fabric range Customer specified Finish Options:

Customer supplied

Opal acrylic - matt or gloss Diffuser:

240V - 50Hz Voltage: CRI: IP Rating: IP20 Light Source:

LED light hub 3000K, 4000K, 5000K CCT:

Beam Angle:

Ambient temp: 0°C ... 45°C

**Dimming Options:** Universal dimming optional

Lumen Package: /Fixture


- 5500mm = 18W 1700 Lm (2 Light) - 600mm = 27W 2550 Lm (3 Light) - 800mm = 27W 2550 Lm (3 Light) - 1000mm = 36W 3400 Lm (4 Light) - 1500mm = 36W 3400 Lm (4 Light)


Mounting:

- Wire suspended BTC (back to canopy)

- Wire suspended DTC (direct to ceiling)

- Rod Suspended









## Halo





### **UFO** Custom LED Luminaire

The UFO Pendant is a bespoke Australian Made light fitting. Every feature of this pendant can be customised including the size, lining, output and suspension length.

Dimensions:

600/500 Ø x 300mm H 800/700 Ø x 300mm H 900/800 Ø x 300mm H 1000/900 Ø x 350mm H 1200/1100 Ø x 400mm H

Materials: Steel, fabric, acrylic

Finish Options: Contessa designer fabric range

Customer specified Customer supplied

Opal acrylic - matt or gloss Diffuser:

240V - 50Hz Voltage: CRI: IP Rating: IP20 Light Source:

LED light hub 3000K, 4000K, 5000K CCT:

Beam Angle:

0°C ... 45°C Ambient temp:

**Dimming Options:** Universal dimming optional

Lumen Package: /Fixture

- 600mm = 18W 1700 Lm (2 Light) - 800mm = 27W 2550 Lm (3 Light)


- 9000mm = 27W 2550 Lm (3 Light) - 1000mm = 36W 3400 Lm (4 Light) - 1200mm = 36W 3400 Lm (4 Light)

Mounting:

- Wire suspended BTC (back to canopy)


- Wire suspended DTC (direct to ceiling)

- Rod Suspended







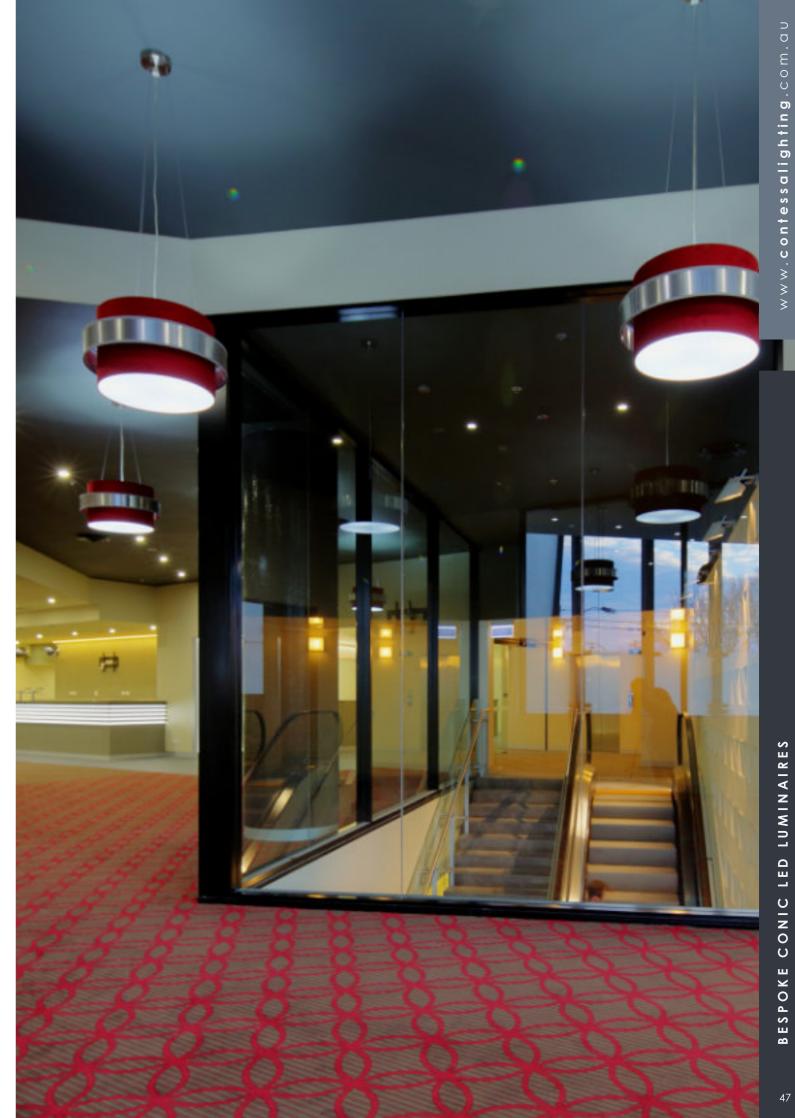





### **UFO** Custom LED Luminaire

The UFO Pendant is a bespoke Australian Made light fitting. Every feature of this pendant can be customised including the size, lining, output and suspension length.

500/350 Ø x 400mm H 600/400 Ø x 500mm H Dimensions:

750/500 Ø x 600mm H 900/600 Ø x 800mm H 1100/700 Ø x 800mm H

Materials: Steel, fabric, acrylic

Contessa designer fabric range Customer specified Finish Options:

Customer supplied

Opal acrylic - matt or gloss Diffuser:

240V - 50Hz Voltage: CRI: IP Rating: IP20 Light Source:

LED light hub 3000K, 4000K, 5000K CCT:

Beam Angle:

Ambient temp: 0°C ... 45°C

**Dimming Options:** Universal dimming optional

Lumen Package: /Fixture

- 500mm = 27W 2500 Lm (3 Light) - 600mm = 36W 3400 Lm (3 + 1 Light)


- 750mm = 36W 3400 Lm (3 + 1 Light) - 900mm = 45W 4250 Lm (4 + 1 Light) - 1100mm = 45W 4250 Lm (4 + 1 Light)

Mounting:

- Wire suspended BTC (back to canopy)

- Wire suspended DTC (direct to ceiling)

- Rod Suspended









# Multi





### MULTI Custom LED Luminaire

The Multi Pendant is a bespoke Australian Made light fitting. Every feature of this pendant can be customised including the size, lining, output and suspension length.

600 Ø x 500mm H 800 Ø x 600mm H Dimensions:

Steel, fabric, acrylic

Finish Options:

Contessa designer fabric range Customer specified Customer supplied

1200 Ø x 700mm H

Diffuser: Opal acrylic - matt or gloss

240V - 50Hz Voltage: CRI: >80

IP Rating: IP20

Light Source: LED light hub 3000K, 4000K, 5000K CCT:

360° Beam Angle:

0°C ... 45°C Ambient temp:

**Dimming Options:** Universal dimming optional


Lumen Package:

- 600mm = 27W 2500 Lm (3 Light) - 800mm = 36W 3400 Lm (3 + 1 Light) - 1200mm = 45W 4250 Lm (4 + 1 Light) /Fixture


Mounting:

Materials:

- Wire suspended BTC (back to canopy)
- Wire suspended DTC (direct to ceiling)
- Rod Suspended











## SPA



### **SPA** Custom LED Luminaire

The SPA Pendant is a bespoke Australian Made light fitting. Every feature of this pendant can be customised including the size, lining, output and suspension length.

1040 W x 430 D x 480mm H 1200 W x 350 D x 300mm H Dimensions:

1400 W x 500 D x 300mm H 2000 W x 500 D x 480mm H

Materials: Steel, fabric, acrylic

Contessa designer fabric range Customer specified Finish Options:

Customer supplied

Opal acrylic - matt or gloss Diffuser:

Voltage: 240V - 50Hz >80 IP20 CRI: IP Rating: Light Source:

LED Bar Light 3000K, 4000K, 5000K CCT:

Beam Angle: 270° 0°C ... 45°C Ambient temp:

**Dimming Options:** Universal dimming optional

Lumen Package: /Fixture

- 1040mm = 27W 2500 Lm (3 Light) - 1200mm = 27W 2500 Lm (3 Light) - 1400mm = 36W 3400 Lm (4 Light)

- 2000mm = 45W 4250 Lm (5 Light)

Mounting:

- Wire suspended DTC (direct to ceiling)

- Rod Suspended

- Surface Mounted

SPA PENDANT (TOP VIEW)

VERTICAL SPA (SIDE VIEW)

> TAPERED SPA (SIDE VIEW)





## Cubic





### **CUBIC** Custom LED Luminaire

The Cube Pendant is a bespoke Australian Made light fitting. Every feature of this pendant can be customised including the size, lining, output and suspension length.

500 W x 500 D x 300mm H 600 W x 600 D x 300mm H Dimensions: 700 W x 700 D x 350mm H 800 W x 800 D x 400mm H

Materials: Steel, fabric, acrylic

Finish Options: Contessa designer fabric range

Customer specified Customer supplied

900 W x 900 D x 400mm H

Diffuser: Opal acrylic - matt or gloss

240V - 50Hz Voltage: CRI: IP Rating: IP20 LED light hub 3000K, 4000K, 5000K Light Source: CCT: Beam Angle: 0°C ... 45°C Ambient temp:

Universal dimming optional **Dimming Options:** 

Lumen Package:

- 500mm = 27W 2500 Lm (3 Light) /Fixture - 600mm = 27W 2500 Lm (3 Light)

- 700mm = 27W 2500 Lm (3 Light) - 800mm = 36W 3400 Lm (4 Light)

- 900mm = 36W 3400 Lm (4 Light)

Mounting:

- Wire suspended BTC (back to canopy)

- Wire suspended DTC (direct to ceiling)

- Rod Suspended

- Surface Mounted

W

ROUND CORNER

SQUARE CORNER



## Carton





### **CARTON** Custom LED Luminaire

The Carton Pendant is a bespoke Australian Made light fitting. Every feature of this pendant can be customised including the size, lining, output and suspension length.

800 W x 300 D x 300mm H 1000 W x 350 D x 350mm H Dimensions:

1500 W x 400 D x 350mm H 1800 W x 400 D x 400mm H 2000 W x 450 D x 500mm H

Materials: Steel, fabric, acrylic

Contessa designer fabric range Customer specified Finish Options:

Customer supplied

Opal acrylic - matt or gloss Diffuser:

240V - 50Hz Voltage: CRI: IP Rating: Light Source: IP20

LED Bar Light 3000K, 4000K, 5000K CCT:

Beam Angle: Ambient temp: 0°C ... 45°C

**Dimming Options:** Universal dimming optional

Lumen Package:

- 800mm = 27W 2500 Lm (3 Light) /Fixture

- 1000mm = 27W 2500 Lm (3 Light) - 1500mm = 36W 3400 Lm (4 Light) - 1800mm = 36W 3400 Lm (4 Light) - 2000mm = 45W 4250 Lm (5 Light)

Mounting:

- Wire suspended DTC (direct to ceiling)

- Rod Suspended

- Surface Mounted

SQUARE CORNER

ROUND CORNER





## Astris



### **ASTRIS** Custom LED Luminaire

The Astris Pendant is a bespoke Australian Made light fitting. Every feature of this pendant can be customised including the size, lining, output and suspension length.

Dimensions: 1000 x 450mm H (6 Shades)

Materials: Steel, fabric, acrylic

Contessa designer fabric range Customer specified Customer supplied Finish Options:

Diffuser: Not applicable

240V - 50Hz >80 Voltage: CRI: IP Rating: IP20

Light Source: CCT: LED globes 3000K, 4000K, 5000K

Beam Angle: 270° 0°C ... 45°C Ambient temp:

**Dimming Options:** Universal dimming optional

Lumen Package: /Fixture

- 1000mm = 54W 5100 Lm

Mounting:

- Wire suspended BTC (back to canopy) - Wire suspended DTC (direct to ceiling)





### TRIX Custom LED Luminaire

The Trix Pendant is a bespoke Australian Made light fitting. Every feature of this pendant can be customised including the size, lining, output and suspension length.

500 x 500 x 250mm H 700 x 700 x 250mm H Dimensions:

900 x 900 x 300mm H

Materials: Steel, fabric, acrylic

Finish Options: Contessa designer fabric range

Customer specified Customer supplied

Diffuser: Opal acrylic - matt or gloss

Voltage: 240V - 50Hz

CRI: >80 IP20 IP Rating:

**Light Source:** LED lamp hub CCT:

3000K, 4000K, 5000K

Beam Angle: 0°C ... 45°C Ambient temp:

Universal dimming optional **Dimming Options:** 

360°

Lumen Package: /Fixture

- 500mm = 27W 2500 Lm - 700mm = 27W 2500 Lm - 900mm = 30W 2900 Lm


Mounting:

- Wire suspended BTC (back to canopy)


- Wire suspended DTC (direct to ceiling)

- Rod Suspended







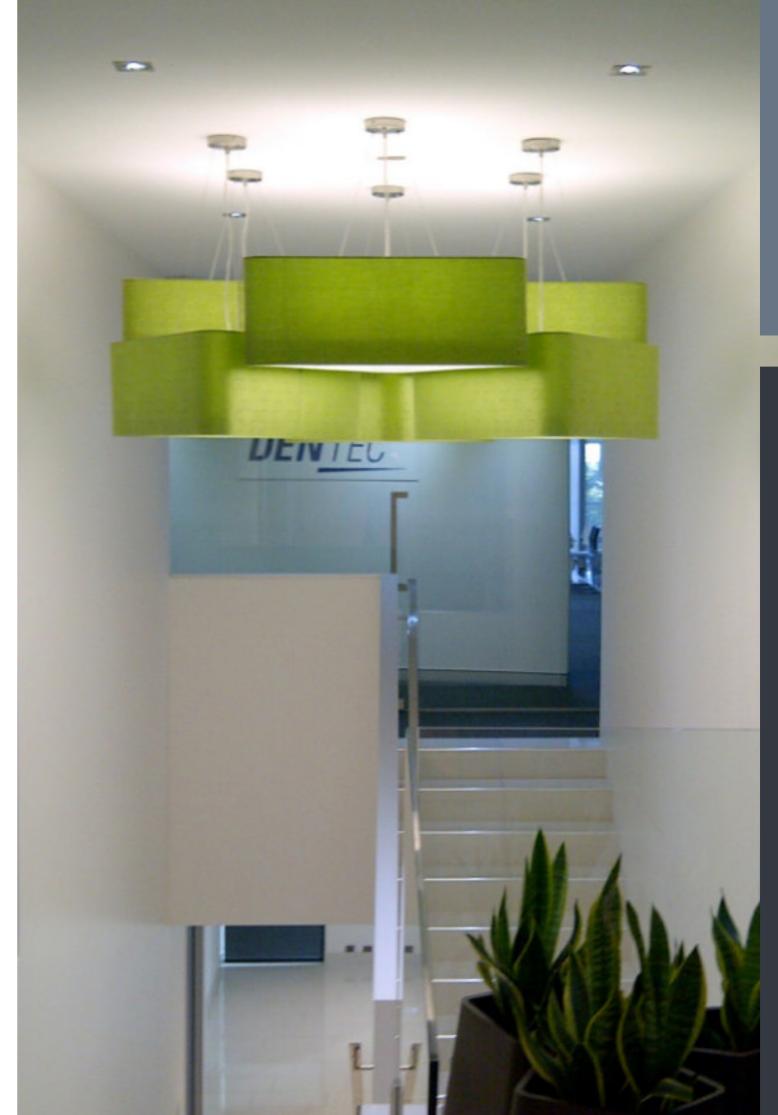

### Fabric Wall Lights

### **BESPOKE SQUARE SET** Custom LED Wall Light

DIMENSIONS (WxDxH) 200 x 125 x 300mm H Custom dimensions

LIGHT SOURCE 1 Lamp Optional LED panel

WATTAGE 10 W Custom wattage

LUMEN OUTPUT 850 Lumens Custom output COLOUR TEMPERATURE

3000K, 4000K, 5000K

#### BESPOKE ROUNDED SQUARE SET Custom LED Wall Light

DIMENSIONS (WxDxH) 250 x 125 x 300mm H Custom dimensions

LIGHT SOURCE Optional LED panel

WATTAGE 10 W Custom wattage LUMEN OUTPUT 850 Lumens Custom output COLOUR TEMPERATURE

3000K, 4000K, 5000K

### **BESPOKE HOOP SET** Custom LED Wall Light

DIMENSIONS (WxDxH) 200 x 100 x 250mm H 250 x 125 x 300mm H Custom dimensions

LIGHT SOURCE 1 Lamp 1 Lamp

Optional LED panel

WATTAGE 10 W 10 W

Custom wattage

850 Lumens

LUMEN OUTPUT COLOUR TEMPERATURE

850 Lumens Custom output

3000K, 4000K, 5000K





### BESPOKE ELLIPTIC SET Custom LED Wall Light

DIMENSIONS (WxDxH) 280 x 110 x 280mm H Custom dimensions

LIGHT SOURCE 1 Lamp Optional LED panel

WATTAGE 10 W Custom wattage LUMEN OUTPUT 850 Lumens Custom output COLOUR TEMPERATURE 3000K, 4000K, 5000K



### **Physical Characteristics**

Steel frame, plastic, fabric Material:

**Finish Options:** Contessa designer fabric range

Customer specified Customer supplied

Diffuser: Optional top and base matt opal acrylic

### **Electrical Configuration**

Dimmable:

Voltage: 240V - 50Hz >80 IP rating:

LED type options: E27 LED Lamps or LED Panel LED Lamps 270° or LED panel 120° Beam angle: Ambient temp: -20° ....+50°

Optional.

- Trailing or leading edge









**ROUNDED SQUARE SET** 



**SQUARE SET** 



**ELLIPTIC SET** 

**ELLIPTIC SET** 





### COPYRIGHT © 2018

No part of this catalogue may be reproduced without prior permission from Contessa Lighting.

Models and technical specifications are subject to change.

CONTESSALIGHTING.COM.AU

SALES@CONTESSALIGHTING.COM.AU

TEL: 1300 887 948