



## Physical Characteristics:

### Dimensions:

Profile: 30x30mm H

See suggested dimensions on next page

### Diffuser Options:

Matt opal frosted

### Mounting Options:

- Suspended 2 x wire 2000mm (one acts as power supply) back to canopy (BTC)  
Canopy Size: 500 L x 70 W x 50mm H
- Suspended 2 x wire 2000mm (one acts as power supply) direct to ceiling (DTC)  
No Canopy - remotely stored driver.
- Rod Suspension - custom length

## Electrical Configuration:

### Power Options:

- 8 Watts /m
- 12 Watts /m
- 16 Watts /m

### IP Rating:

IP20

### Lumen Efficacy:

>156 Lumens / watt

### LED Lifetime:

50,000 Hours @ 25°C

### Control Gear:

24V Constant voltage LED Driver

### Dimming Options:

Phase cut included  
SwitchDIM optional  
DALI optional

## Photometric's:

### Lumen Output:

- 8 Watts = 1200 lumens /m
- 12 Watts = 1800 lumens /m
- 16 Watts = 2500 lumens /m

### LED Type:

Tridonic LED flex

### CRI:

CRI 80+ (CRI 90 available)

### CCT:

3000k, 4000k, 6500k

*(Outputs based on 4000k)*

### Distribution:

Indirect/internal - 110° Diffused.

## Finishes:



Texture Black



Texture White




Tarnished Brass



Custom Colour  
*(Select your own)*

Size Suggestions:

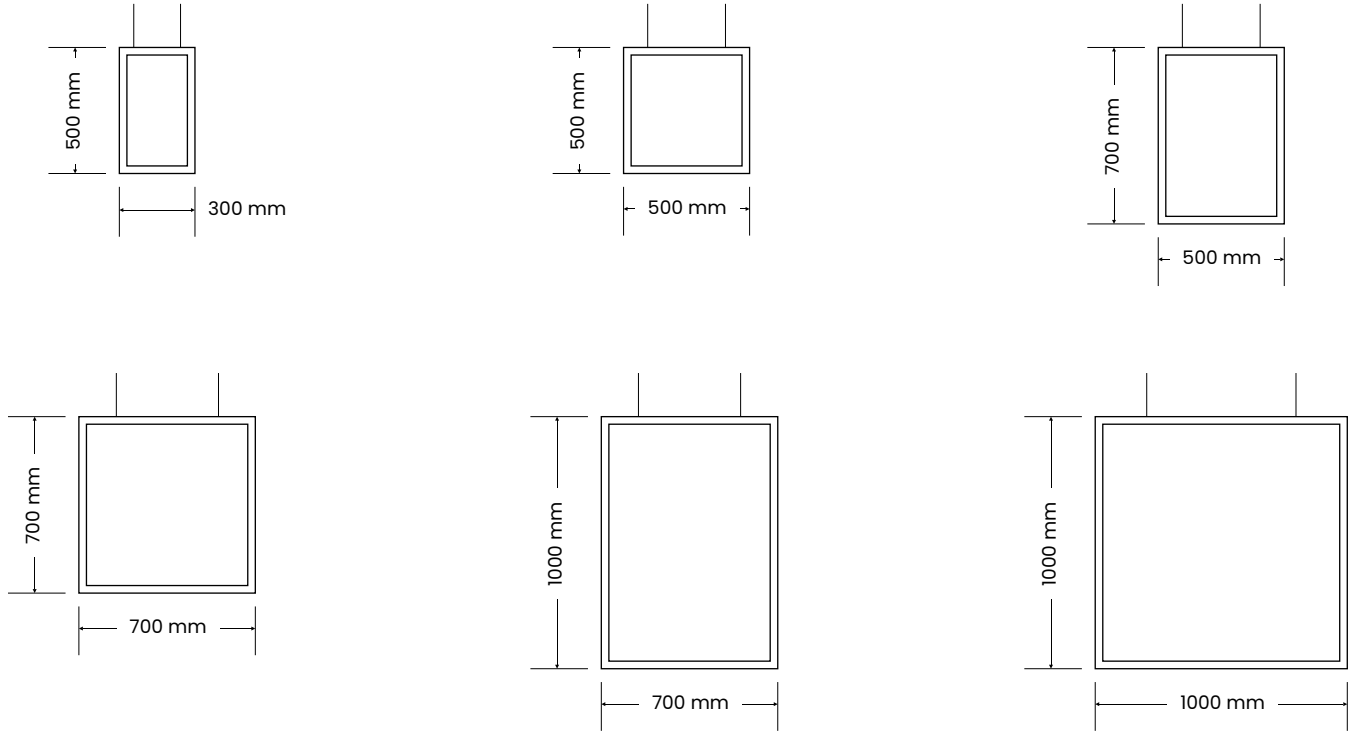

*The dimensions listed are just a guide. Any size combination can be used up to 3 meters*