


CONT≡SSA



Linear

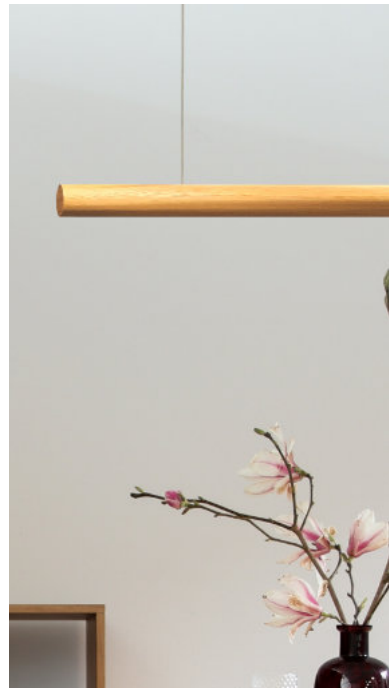


Linear 30




CONTESSA
bespoke lighting design

Linear 30

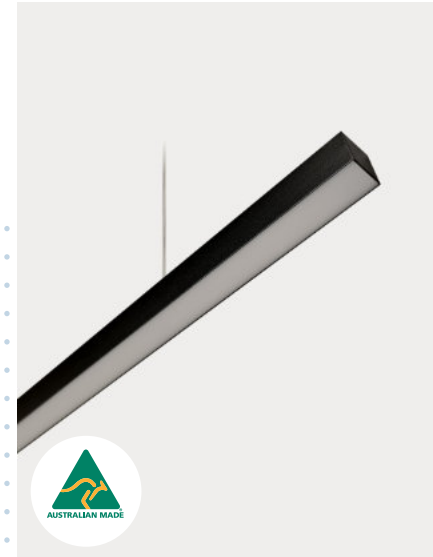

2 in 1 Suspension No extra power cable

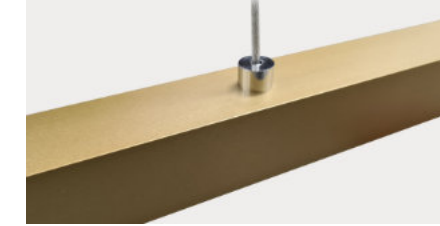

Slimline mounts



Screwless end caps



Optional canopy



Physical Characteristics:

Profile:
30mm W x 32mm H

Length:
Custom lengths up to 3 meters in powdercoat or 2.9m in premium finishes then a join or junction is required.

Mounting:
See below - *Suspension positions;*

- 1 - 2m length = 200mm from each end
- 2.1 - 3m length = 300mm from each end

Wire positions can be customised.

Junctions:
L, T & Straight joins available.

Electrical Configuration:

Power Options:

- 11 Watts / meter (Standard)
- 16 Watts / meter (High output)

IP Rating:
IP20 - For indoor use only. Should not be used in wet areas.

Control gear:
24V Constant voltage LED Driver

Dimming options:

- Phase cut included
- SwitchDIM optional
- DALI optional

Photometrics:

Lumen packages:

- 11W = 1800 Lm/m
- 16W = 2500 Lm/m

LED type:
Tridonic LED flex light engine

CRI:
CRI 80 (CRI 90+ available)

CCT:
3000K or 4000K

Distribution:
100° direct. Diffused

Finishes:



Texture Black



Texture White



Tarnished Brass



Brushed Brass






Brushed Aluminium



Dark Bronze

These finishes wont work with your colour scheme? Specify your own.



Mounting options:

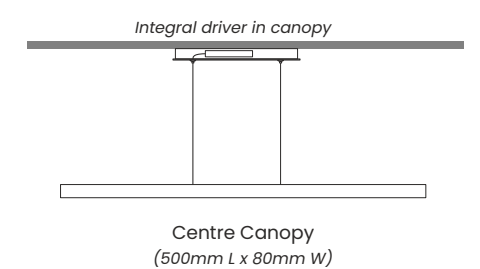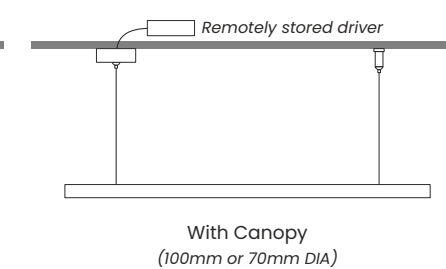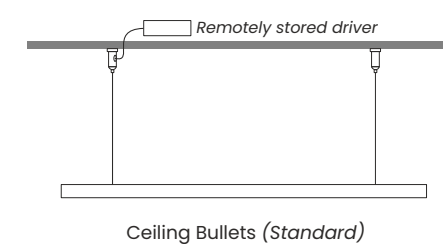

Linear 90

CONTESSA
bespoke lighting design

Linear 90

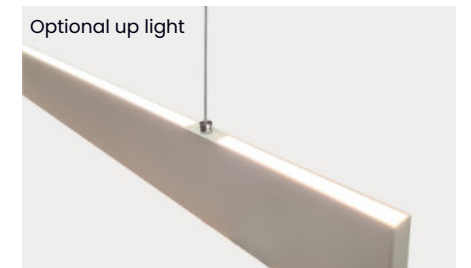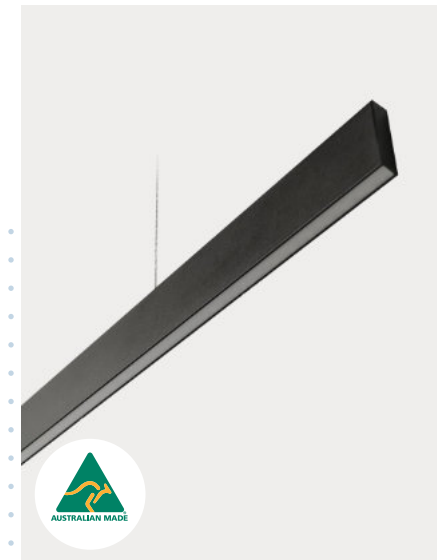

Physical Characteristics:

Profile:
20mm W x 90mm H

Length:
Custom lengths up to 3 meters in powdercoat or 2.9m in premium finishes then a join or junction is required.

Mounting:
See below - *Suspension positions;*

- 1 - 2m length = 200mm from each end
- 2.1 - 3m length = 300mm from each end

Wire positions can be customised.

Junctions:
L, T & Straight joins available.

Electrical Configuration:

Power Options:

- 11 Watts / meter (Standard)
- 16 Watts / meter (High output)
- 11 Watts / meter (Up)

IP Rating:
IP20 - For indoor use only. Should not be used in wet areas.

Control gear:
24V Constant voltage LED Driver

Dimming options:

- Phase cut included
- SwitchDIM optional
- DALI optional

Photometrics:

Lumen packages:

- 11W = 1800 Lm/m (Down)
- 16W = 2500 Lm/m (Down)
- 11W = 1200 Lm/m (Up)


LED type:
Tridonic LED flex light engine

CRI:
CRI 80 (CRI 90+ available)

CCT:
3000K or 4000K




Distribution:
100° direct & in-direct. Diffused

Finishes:

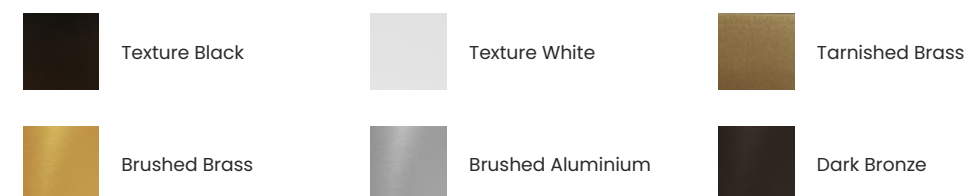

These finishes wont work with your colour scheme? Specify your own.


Mounting options:

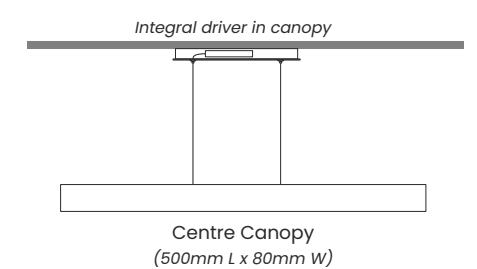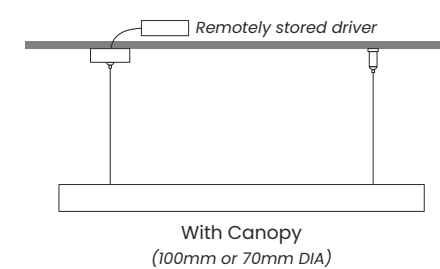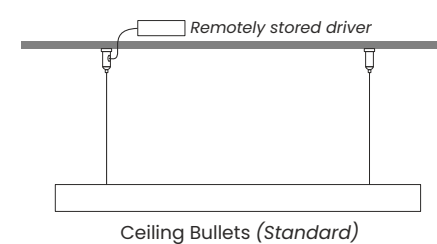

Dowel 40

CONTESSA
bespoke lighting design

Dowel 40

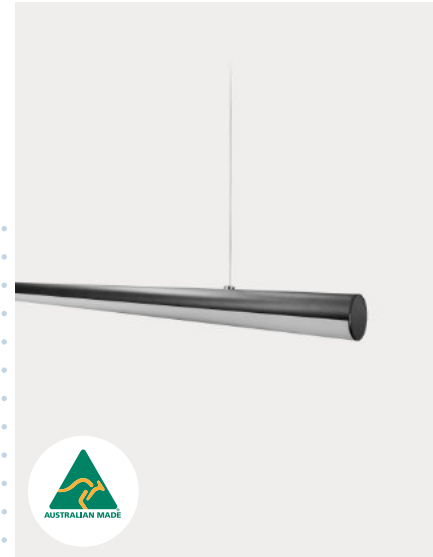

2 in 1 Suspension No extra power cable



Slimline mounts



Screwless end caps



Optional timber ends



Physical Characteristics:

Profile:
40mm Diameter

Length:
Custom lengths up to 2.5 meters in powdercoat or 2.4m in premium finishes then a join or junction is required.


Mounting:
See below - *Suspension positions;*

- 1 - 2m length = 200mm from each end
- 2.1 - 2.5m length = 300mm from each end




Wire positions can be customised.

Junctions:
Straight joins available.

Finishes:

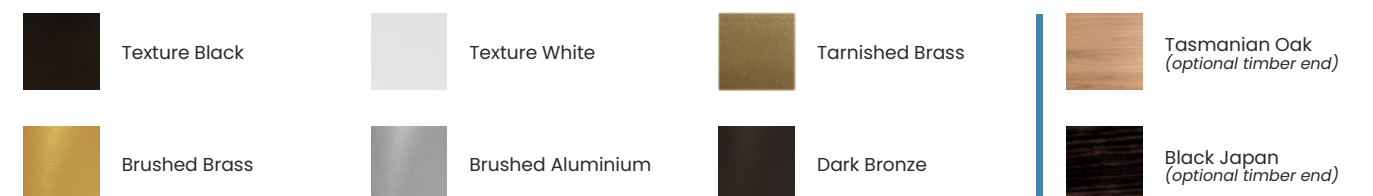

Mounting options:

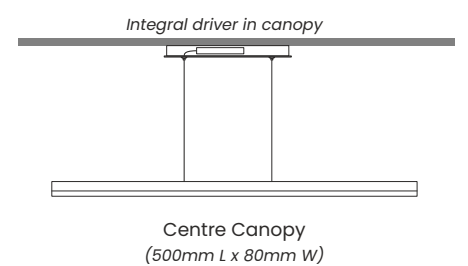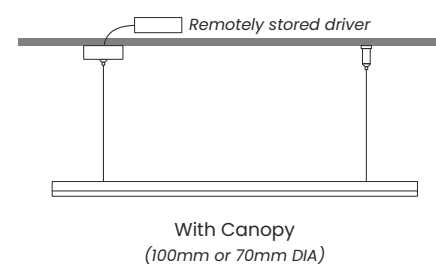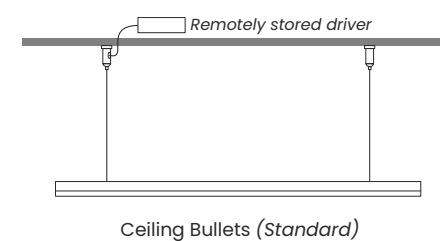

Electrical Configuration:

Power Options:

- 11 Watts / meter (Standard)
- 16 Watts / meter (High output)

IP Rating:
IP20 - For indoor use only. Should not be used in wet areas.

Control gear:
24V Constant voltage LED Driver

Dimming options:

- Phase cut included
- SwitchDIM optional
- DALI optional

Photometrics:

Lumen packages:

- 11W = 1800 Lm/m
- 16W = 2500 Lm/m

LED type:
Tridonic LED flex light engine

CRI:
CRI 80 (CRI 90+ available)

CCT:
3000K or 4000K


Distribution:
180° direct. Diffused

Linear 80



CONTESSA
bespoke lighting design

Linear 80

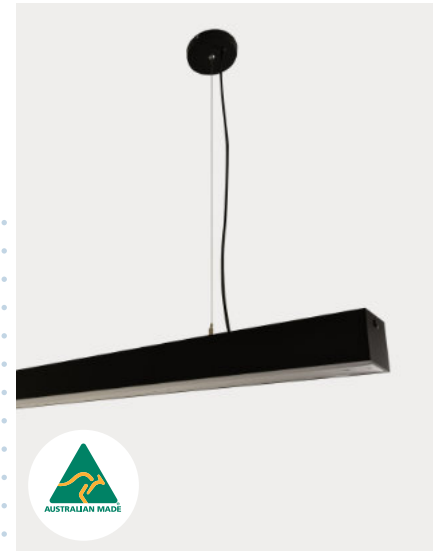

Screwless end caps



Optional dimming button



No light leakage joins



Made with PCB boards
& internal reflector



Physical Characteristics:

Profile:
70mm W x 80mm H

Lengths:
Continuous lengths up to 3600mm then straight join or junction required.

Mounting:
See below - *Suspension positions:*
• >2000mm = 200mm from each end
• 2100mm+ = 300mm from each end
Wire positions can be customised.

Diffuser:
Opal PMMA

Junctions:
L, T, X & Straight no light leakage joins available.

Finishes:



Texture Black



Texture White



Tarnished Brass



Brushed Brass




Brushed Aluminium



Dark Bronze

These finishes wont work with your colour scheme? Specify your own.

Mounting options:

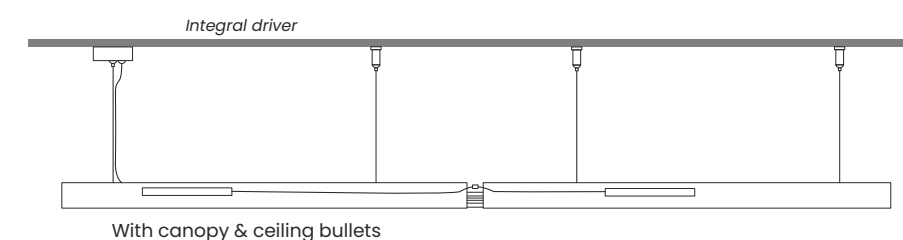

Electrical Configuration:

Power Options:

- 15 Watts /m
- 17 Watts /m
- 22 Watts /m
- 32 Watts /m

IP Rating:
IP20 - For indoor use only. Should not be used in wet areas.

Control gear:
Tridonic Constant current LED Driver

Dimming options:

- SwitchDIM
- DALI
- 1-10V

Photometrics:

Lumen packages:

- 15W = 1900 Lm/m
- 17W = 2200 Lm/m
- 22W = 2820 Lm/m
- 32W = 4100 Lm/m

Note. Lumen package can be adjusted as required.

LED type:
Tridonic LED PCB light engine

CRI:
CRI 80 (CRI 90+ available)



CCT:
3000K, 4000K, 5000K

Distribution:
110° direct. Diffused

Solid

CONTESSA
bespoke lighting design

Solid

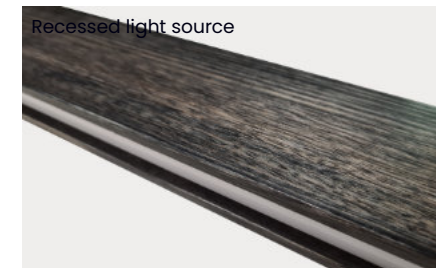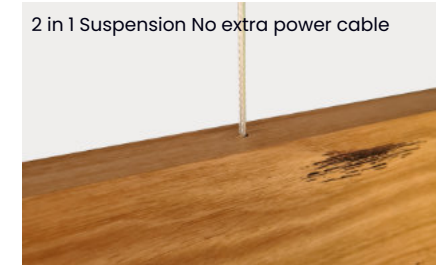

Physical Characteristics:

Profile:
30mm W x 90mm H

Available lengths:

- 1200mm
- 1800mm
- 2400mm

Mounting:

See below - Suspension positions;

- 1200 & 1800 = 150mm from each end
- 2400 = 250mm from each end

Wire positions can be customised.

Electrical Configuration:

Power Options:

- 11 Watts / meter

IP Rating:

IP20 - For indoor use only. Should not be used in wet areas.

Control gear:

24V Constant voltage LED Driver

Dimming options:

- Phase cut included
- SwitchDIM optional
- DALI optional

Photometrics:

Lumen packages:

- 11W = 1800 Lm/m

LED type:

Tridonic LED flex light engine

CRI:

CRI 80 (CRI 90+ available)

CCT:

3000K or 4000K

Distribution:

90° direct. Diffused

Finishes:



Natural Blackbutt






Black Japan




French White Wash

Mounting options:

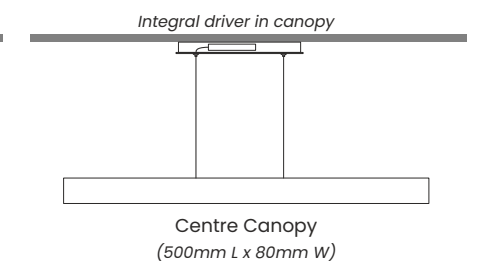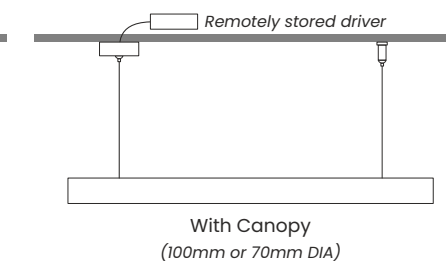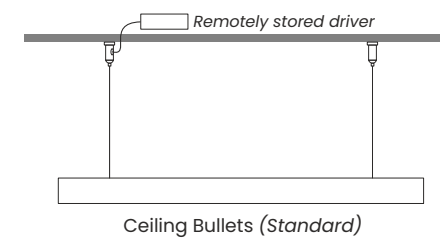

Solid Dowel

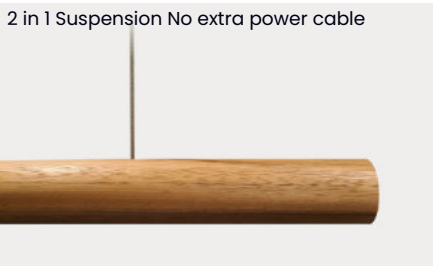

Physical Characteristics:

- Profile:
40mm Diameter
- Available lengths:
- 1800mm (lengths can be joined)
- Mounting:
See below - *Suspension positions;*
- 1800 = 150mm from each end
 - 2000+ = 250mm from each end
- Wire positions can be customised.*
- Junctions:
Straight junction only

Electrical Configuration:

- Power Options:
- 11 Watts / meter
- IP Rating:
IP20 - For indoor use only. Should not be used in wet areas.
- Control gear:
24V Constant voltage LED Driver
- Dimming options:
- Phase cut included
 - SwitchDIM optional
 - DALI optional




Photometrics:

- Lumen packages:
- 11W = 1800 Lm/m
- LED type:
Tridonic LED flex light engine
- CRI:
CRI 80 (CRI 90+ available)
- CCT:
3000K or 4000K
- Distribution:
90° direct. Diffused

Finishes:

- Tasmanian Oak Black Japan French White Wash

Mounting options:

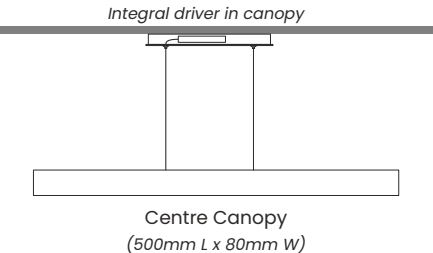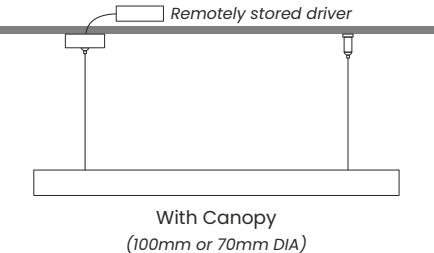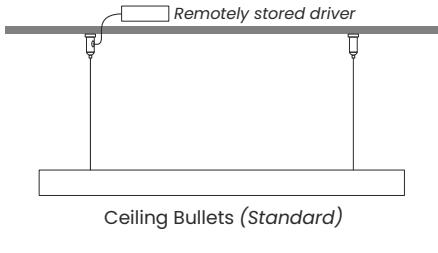

CONTESSA

Tel: 1300 887 948

Email: sales@contessalighting.com.au

Web: www.contessalighting.com.au