


CAUTION – THIS PRODUCT MUST BE INSTALLED BY A LICENSED ELECTRICIAN OTHERWISE ALL WARRANTY IS VOID

Suspended on Chain

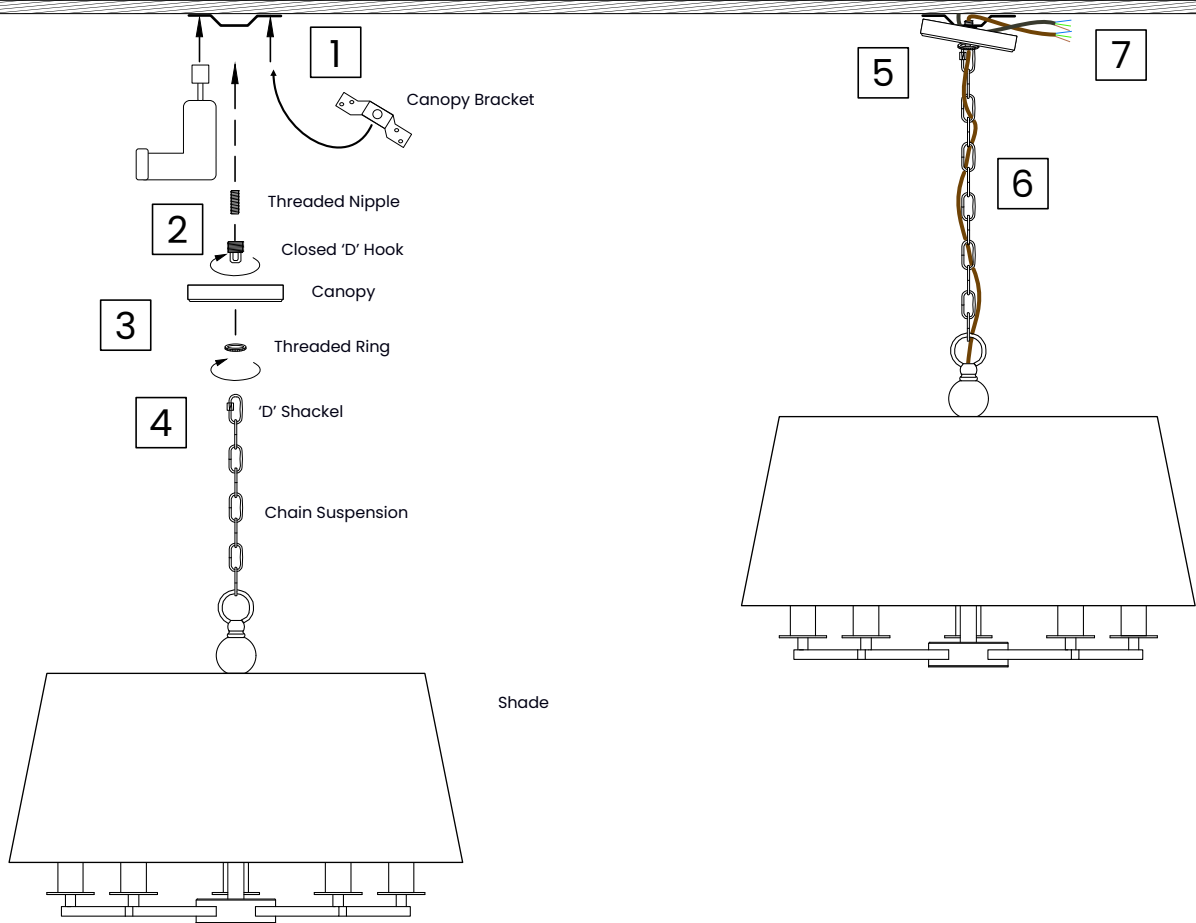

- 1** Attach the canopy bracket to the ceiling
- 2** Wind the Closed 'D' Hook onto the Threaded Nipple.
- 3** Slide the Canopy over the Closed 'D' Hook and keep in place using the Threaded Nurlled Ring
- 4** Open the 'D' Shackel and hang the pendant onto the Closed 'D' hook. Close the 'D' Shackel.
- 5** Un-fasten the Threaded Nurlled Ring and allow the canopy to drop down to give access to the wiring
- 6** Thread the power cable up through the chain (i.e every 4 links). Ensure there is no pressure on the power cord. Thread through the centre Closed 'D' hook
- 7** Wire up the fitting to 240V using connectors. Refit the ceiling canopy and keep in place with the Threaded Nurlled Ring.