



## Physical Characteristics:

### Dimensions:

Profile: 60x70mm H

See diameters on next page

### Diffuser Options:

Matt opal frosted

### Mounting Options:

- Suspended wires 2000mm plus power flex back to canopy (BTC)  
(Only up to 1200mm)
- Suspended wires 2000mm plus power flex direct to ceiling (DTC)  
Remotely stored driver

## Electrical Configuration:

### Power:

- 660mm = 38 Watts
- 860mm = 50 Watts
- 1060mm = 63 Watts
- 1260mm = 75 Watts
- 1560mm = 94 Watts
- 2060mm = 126 Watts
- 2460mm = 151 Watts
- 3060mm = 188 Watts
- 5000mm = 314 Watts

### IP Rating:

IP20

### Lumen Efficacy:

>90 Lumens / watt

### LED Lifetime:

50,000 Hours @ 25°C

### Control Gear:

Constant current LED Driver

### Dimming Options:

SwitchDIM optional  
DALI optional

## Photometric's:

### Lumen Output:

- 38 Watts = 3420 lumens
- 50 Watts = 4500 lumens
- 63 Watts = 5670 lumens
- 75 Watts = 6750 lumens
- 94 Watts = 8460 lumens
- 126 Watts = 11,340 lumens
- 151 Watts = 13,590 lumens
- 188 Watts = 16,920 lumens
- 314 Watts = 28,260 lumens

### LED Type:

Osram LED boards

### CRI:

CRI 80+

### CCT:

3000k, 4000k, 5000k

*(Outputs based on 3000k)*

### Distribution:

Direct. 105° Diffused.

## Finishes:



Texture Black



Texture White







Tarnished Brass




Custom Colour  
*(Select your own)*

Size options:

600, 800, 1000 & 1200mm supplied as one piece



1500mm + supplied in parts (as per diagrams below)

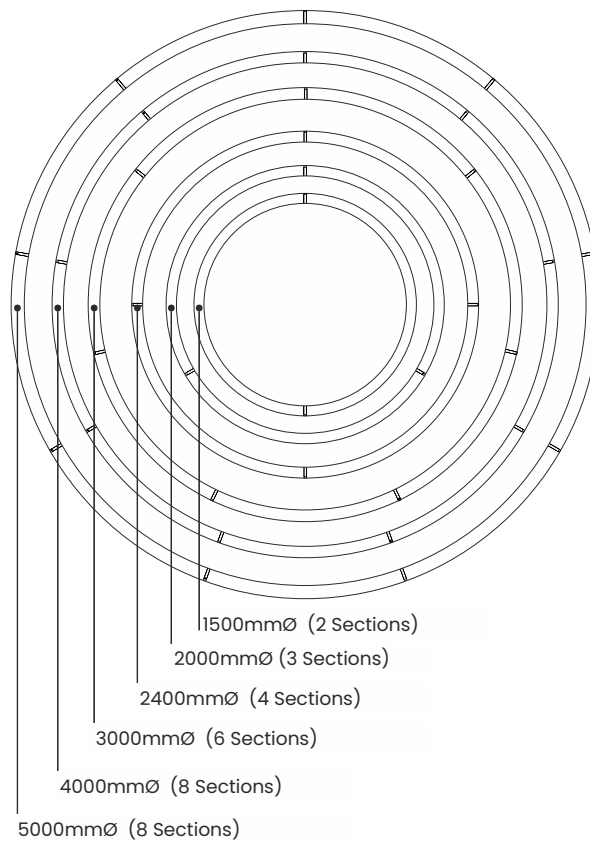

*All pendants can be fitted with DALI control gear.*