



Physical Characteristics:

Dimensions:

Fitting diameter: 60mm

- 400mm h
- 600mm h
- 800mm h
- 1000mm h
- Custom height <4m

Diffuser Options:

None or Satin frosted acrylic

Finishing:

Exterior and interior of the tube.

Mounting Options:

- Suspended 1 x 2000mm power flex
- Rod suspension (custom length)
- Surface mounted

Canopy Size: 70mm Ø x 30mm H

Electrical Configuration:

Power:

- COB Chip optional
- GU10 9W LED

IP Rating:

IP20

Lumen Efficacy:

>90 Lumens / watt

LED Lifetime:

50,000 Hours @ 25°C

Control Gear:

240 Volt or LED CC Driver for COB chip

Dimming Options:

Phase cut
SwitchDIM optional
DALI optional

Photometric's:

Lumen Output:

- 9 Watts = 700 lumens

LED Type:

GU10

CRI:

CRI 80+

CCT:

3000k, 4000k, 5000k

(Outputs based on 3000k)

Distribution:

Direct. 60° Reflector

Finishes:



Texture Black



Texture White



Brushed Brass





Tarnished Brass



Custom Colour
(Select your own)

Size options:




Mounting options:



Flex Suspension



Rod Suspension

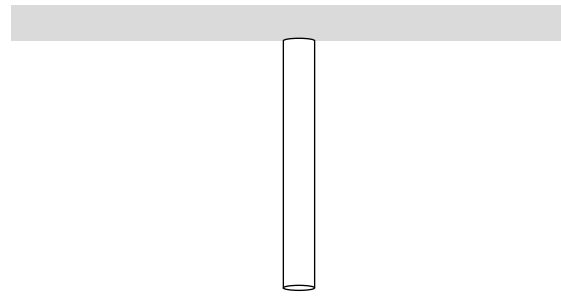

Surface Mounted

Tube 60 pendants can be fitted with DALI control gear.