



## Physical Characteristics:

### Dimensions:

Profile: 20x25mm H

See diameters below.

### Diffuser Options:

Matt opal frosted

### Mounting Options:

- Suspended 3 x wire 3000mm (one acts as power supply) back to canopy (BTC)  
Canopy Size: 240mm Ø x 50mm H
- Suspended 3 x wire 3000mm (one acts as power supply) direct to ceiling (DTC)  
No Canopy

### Finishes

See nest page.

## Electrical Configuration:

### Power:

- 450mm = 24 Watts
- 600mm = 36 Watts
- 800mm = 42 Watts
- 1000mm = 60 Watts
- 1200mm = 65 Watts
- 1500mm = 72 Watts

### IP Rating:

IP20

### Lumen Efficacy:

>80 Lumens / watt

### LED Lifetime:

50,000 Hours @ 25°C

### Control Gear:

Constant current LED Driver

### Dimming Options:

Phase cut included (up to 800mm only)

1-10 Volt included (1000mm +)

SwitchDIM optional

DALI optional

## Photometric's:

### Lumen Output:

- 24 Watts = 1750 lumens
- 36 Watts = 2660 lumens
- 42 Watts = 2984 lumens
- 60 Watts = 3300 lumens
- 65 Watts = 4000 lumens
- 72 Watts = 5100 lumens

### LED Type:

Samsung LED boards

### CRI:

CRI 80+

### CCT:

3000k, 4000k, 5000k

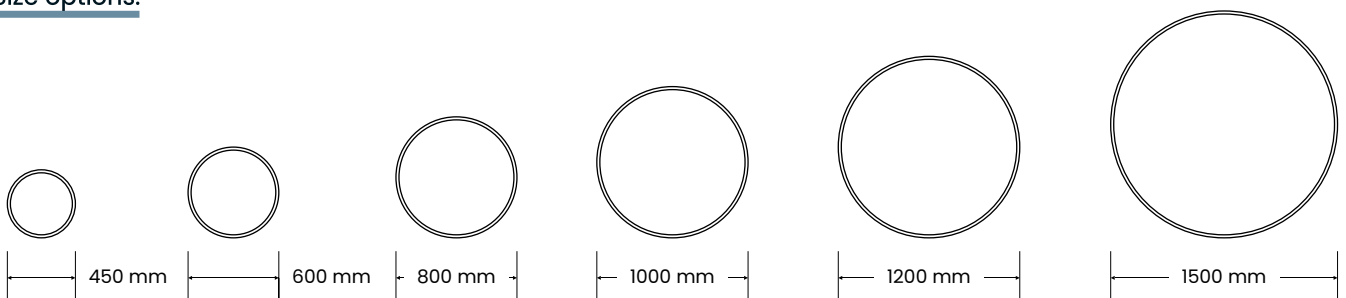
(Outputs based on 3000k)

### Distribution:













Direct. 120° Diffused.

(Indirect light output available)







## Size options:



Acoustic Finishes:

	Ash Storm		Coffee		Ocean		Soft Linen
	Black		Denim		Orange		Solid Grey
	Blue Sky		Desert Sand		Pearl		Stone Blue
	Canary Yellow		Lime		Red		Taupe
	Cast Grey		Midnight		Silver		White

Frame Finishes:

	Texture Black		Texture White		Brushed Gold <i>(450, 600 &amp; 800mm only)</i>		Brushed Nickel
	Tarnished Brass <i>(indent line)</i>		Custom Colour <i>(Select your own)</i>				