

Convex 60





Physical Characteristics:

Profile:
- 60mm W x 70mm H

The Convex 60 pendant system is custom made to order. See details on next page for sizing options.

Colour options:
See finishes below.

Mounting:
Suspended on multiple wires or metal rods.
Number of suspension points depends on final fitting dimensions.

Recessed mounting available.

Electrical Configuration:

Power:
20 Watts / meter

IP Rating:
IP20 - For indoor use only. Should not be used in wet areas.

Lumen efficacy:
>90 Lumens / watt

Control gear:
Constant Current LED Driver

Dimming options:
- On/Off
- SwitchDIM
- DALI

Photometrics:

Lumen packages: (approx.)
- 2000mm = 160W 14400 Lm
- 3000mm = 220W 19800 Lm
- 4000mm = 280W 25200 Lm
- 5000mm = 340W 30600 Lm
- 6000mm = 400W 36000 Lm
- 7000mm = 460W 41400 Lm

LED type:
Integral LED PCB's

CRI:
CRI 80

CCT:
3000K or 4000K
(Outputs based on 4000K)

Distribution:
LED PCB's 120° direct. Diffused

Finishes:



Texture Black



Texture White




Tarnished Brass




Specify Your Own

Size Options:

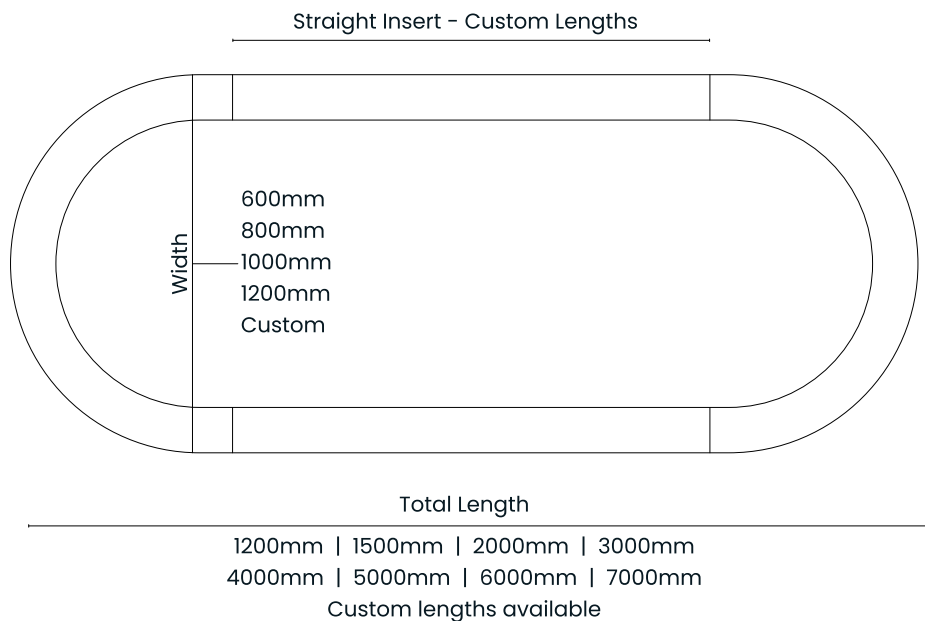

Mounting Options:

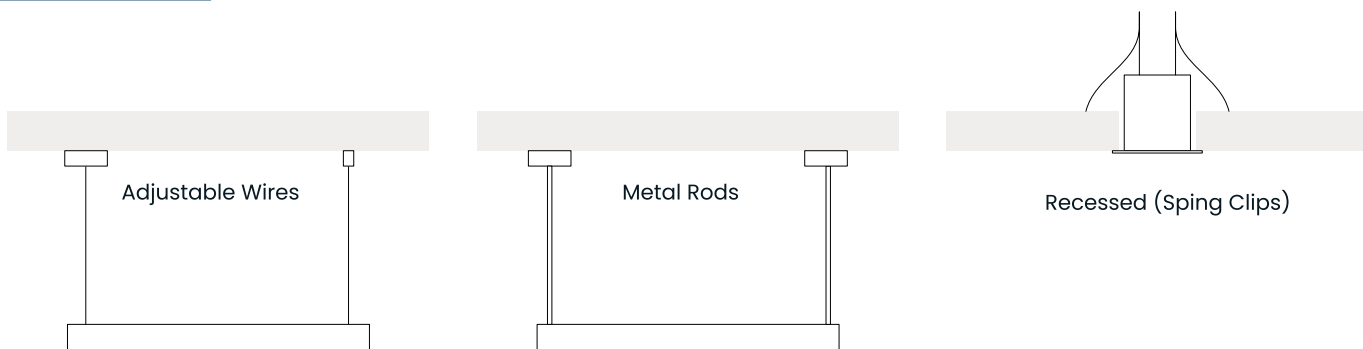

Code Generator:

Product	Width (mm)	Total Length	Finish	Mounting	CCT	Driver
C60	600 60	Insert Length	Black BL	Wires SWS	2700K 2.7	On/Off STA
	800 80		White WH	Rods ROD	3000K 3	SwitchD SwD
	1000 100		T/Brass TB	Recess REC	4000K 4	DALI DALI
	1200 120		Custom CM		5000K 5	

PROJECT:

TYPE CODE:

QTY: