

Linear 90



Physical Characteristics:

Profile:
20mm W x 90mm H

Length:
Custom lengths up to 3 meters in powdercoat or 2.9m in premium finishes then a join or junction is required.


Mounting:
See below - *Suspension positions;*

- 1 - 2m length = 200mm from each end
- 2.1 - 3m length = 300mm from each end

Wire positions can be customised.




Junctions:
L, T & Straight joins available.

Finishes:

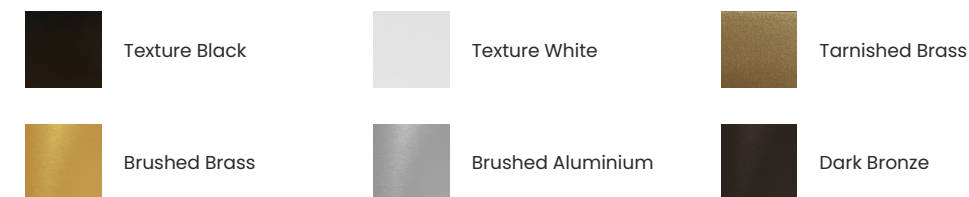

These finishes wont work with your colour scheme? Specify your own.

Mounting options:

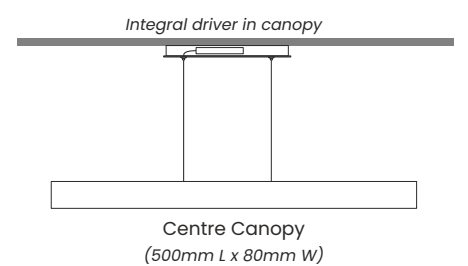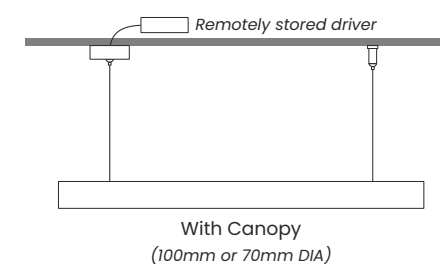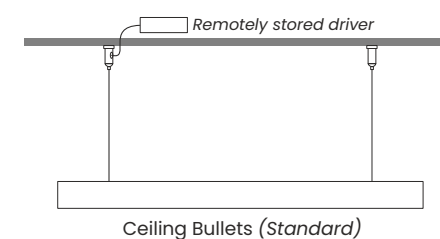

Electrical Configuration:

Power Options:

- 11 Watts / meter (Standard)
- 16 Watts / meter (High output)

- 11 Watts / meter (Up)

IP Rating:
IP20 - For indoor use only. Should not be used in wet areas.

Control gear:
24V Constant voltage LED Driver

Dimming options:

- Phase cut included
- SwitchDIM optional
- DALI optional

Photometrics:

Lumen packages:

- 11W = 1800 Lm/m (Down)
- 16W = 2500 Lm/m (Down)

- 11W = 1200 Lm/m (Up)

LED type:
Tridonic LED flex light engine

CRI:
CRI 80 (CRI 90+ available)

CCT:
3000K or 4000K

Distribution:
100° direct & in-direct. Diffused