

Saturn Nimbus

Direct & Indirect





Physical Characteristics:






Profile:
20mm W x 40mm H

- Diameters:**
- 450mm
 - 600mm
 - 800mm
 - 1000mm
 - 1200mm
 - 1500mm

- Mounting options:**
- 3 x Wire suspended back to canopy (BTC) 3.0m cable, canopy 240x50mm
 - 3 x Wire suspended direct to ceiling (DTC) 3.0m cable (remote driver)

Tier options:
Single tier nimbus pendants can be combined to create multi-tier pendants.

Finishes:

-  Texture Black
-  Texture White
-  Brushed Gold
(450, 600 & 800mm only)
-  Brushed Nickel
(450, 600 & 800mm only)
-  Tarnished Brass
(Available in all sizes & finished to order)

Electrical Configuration:

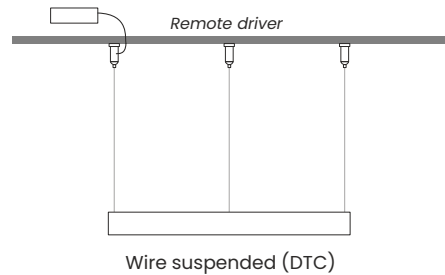
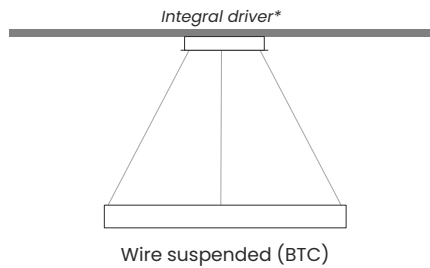
- Power:**
- 450mm = 24 Watts x 2
 - 600mm = 36 Watts x 2
 - 800mm = 42 Watts x 2
 - 1000mm = 60 Watts x 2
 - 1200mm = 65 Watts x 2
 - 1500mm = 70 Watts x 2

IP Rating:
IP20 - For indoor use only. Should not be used in wet areas.

Control gear:
Constant current LED Driver (up & down driven separately)

- Dimming options:**
- Phase cut included (450, 600 & 800 only)
 - 1-10 Volt (1000 +)
 - DALI optional
 - SwitchDIM

Mounting options:



These finishes wont work with your colour scheme? Specify your own.

Photometrics:

- Lumen packages:**
- 24W = 1750 Lumens x 2
 - 36W = 2600 Lumens x 2
 - 42W = 2984 Lumens x 2
 - 60W = 3300 Lumens x 2
 - 65W = 4000 Lumens x 2
 - 70W = 5100 Lumens x 2

LED type:
LED PCB light engine

CRI:
CRI 80

CCT:
3000K, 4000K

Distribution:
120° direct. Diffused direct & in-direct.