
$C O N T \equiv S S A$



Collections



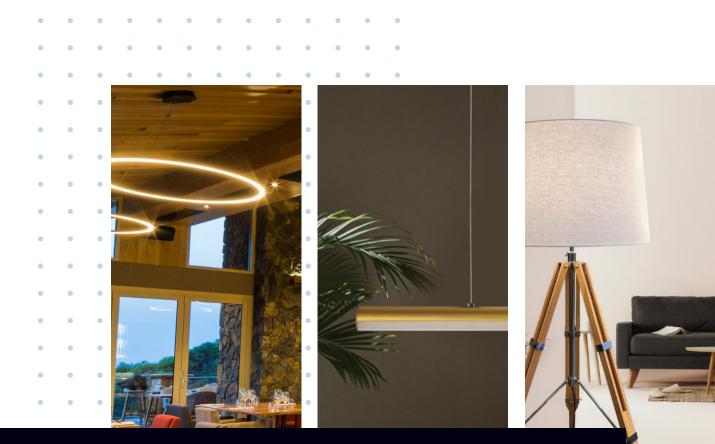


Explore our collections online



Click on the links to skip to the catalogue section

Click <u>here</u> to view parts & accessorises.

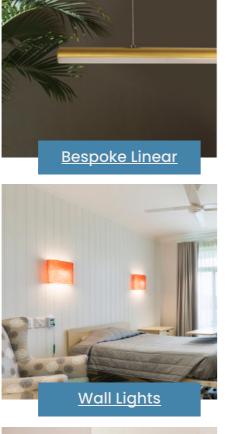







Custom Shades











Linear

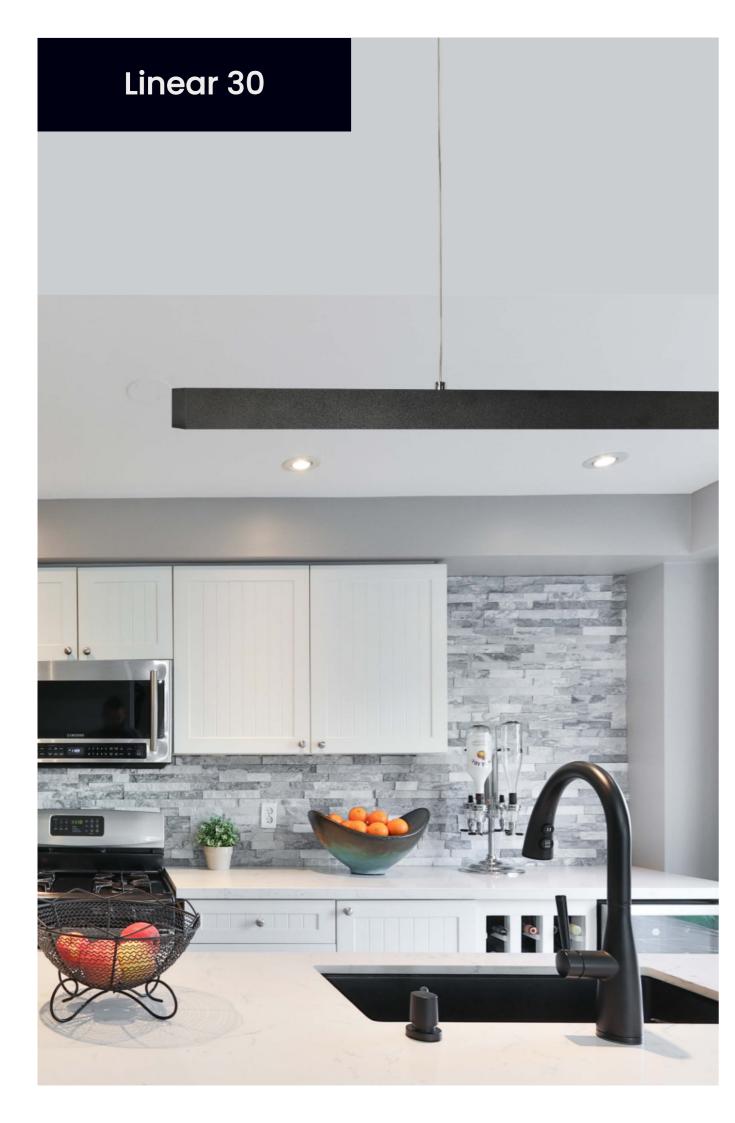



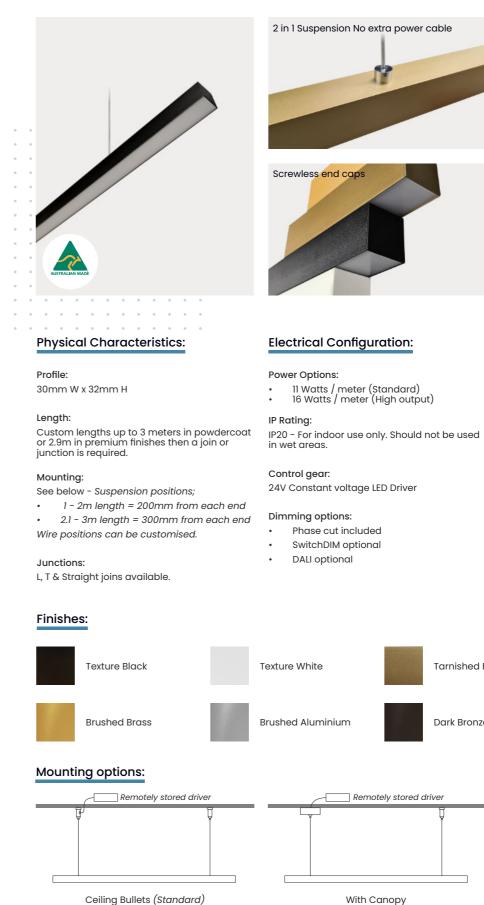

Linear 30





Photometrics:

umen packages:		
11W = 1800 Lm/m 16W = 2500 Lm/m		

LED type: Tridonic LED flex light engine

CRI: CRI 80 (CRI 90+ available)

CCT: 3000K or 4000K

Distribution: 100° direct. Diffused

Tarnished Brass


These finishes wont work with your colour scheme? Specify your own.

Dark Bronze

Integral driver in canopy

With Canopy (100mm or 70mm DIA)


Centre Canopy (500mm L x 80mm W)

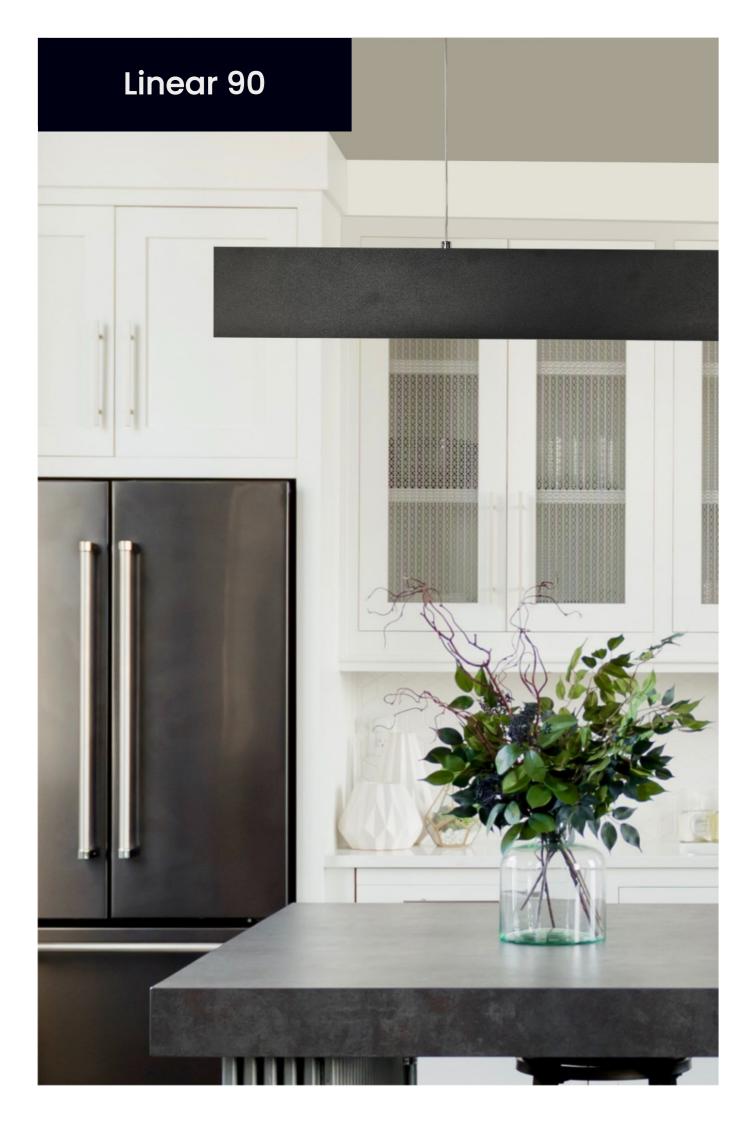

CONTESSA bespoke lighting design



Mounting options:

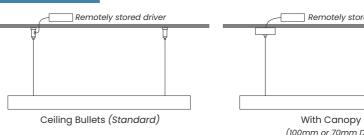

Linear 90





Photometrics:

Lumen packages:

- 11W = 1800 Lm/m (Down)
- 16W = 2500 Lm/m (Down)
- 11W = 1200 Lm/m (Up)

LED type: Tridonic LED flex light engine

CRI: CRI 80 (CRI 90+ available)

CCT: 3000K or 4000K

Distribution: 100° direct & in-direct. Diffused

Tarnished Brass

These finishes wont work with your colour scheme? Specify your own.




Remotely stored driver

Integral driver in canopy

Centre Canopy (500mm L x 80mm W)

(100mm or 70mm DIA)

COPYRIGHT © 2021

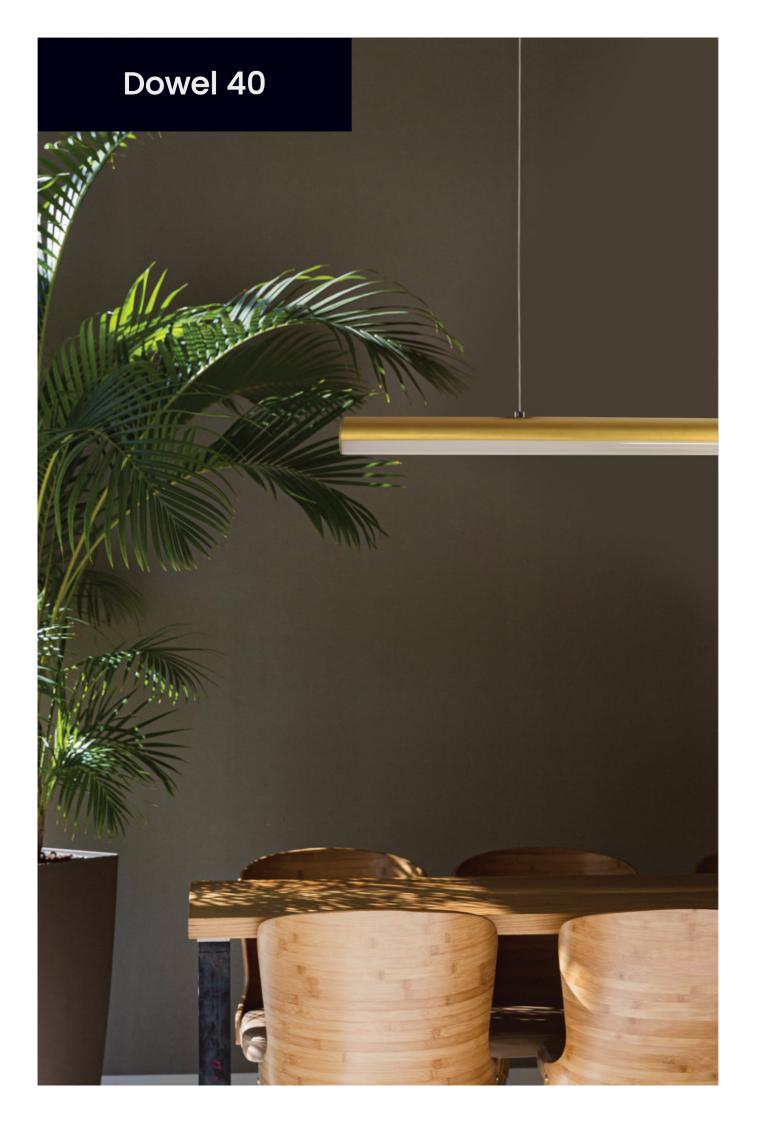

$CONT \equiv SSA$ bespoke lighting design





40mm Diameter

Length: Custom lengths up to 2.5 meters in powdercoat or 2.4m in premium finishes then a join or junction is required.

Mounting:

- See below Suspension positions; • 1 - 2m length = 200mm from each end
- 2.1 2.5m length = 300mm from each end
- Wire positions can be customised.

Junctions:

Finishes:

Straight joins available.

•

•

Power Options:

• .

IP Rating:

in wet areas.


Control gear:

Dimming options:

DALI optional



Mounting options:




With Canopy (100mm or 70mm DIA)

Dowel 40











Electrical Configuration:

11 Watts / meter (Standard) 16 Watts / meter (High output)

IP20 - For indoor use only. Should not be used

24V Constant voltage LED Driver

 Phase cut included SwitchDIM optional

Photometrics:

Lum	en packages:
•	11W = 1800 Lm/m 16W = 2500 Lm/m
•	16W = 2500 Lm/m

LED type: Tridonic LED flex light engine

CRI: CRI 80 (CRI 90+ available)

CCT: 3000K or 4000K

Distribution: 180° direct. Diffused



Tarnished Brass

Dark Bronze




Tasmanian Oak (optional timber end)

Black Japan (optional timber end)

Remotely stored driver

Integral driver in canopy

Centre Canopy (500mm L x 80mm W)

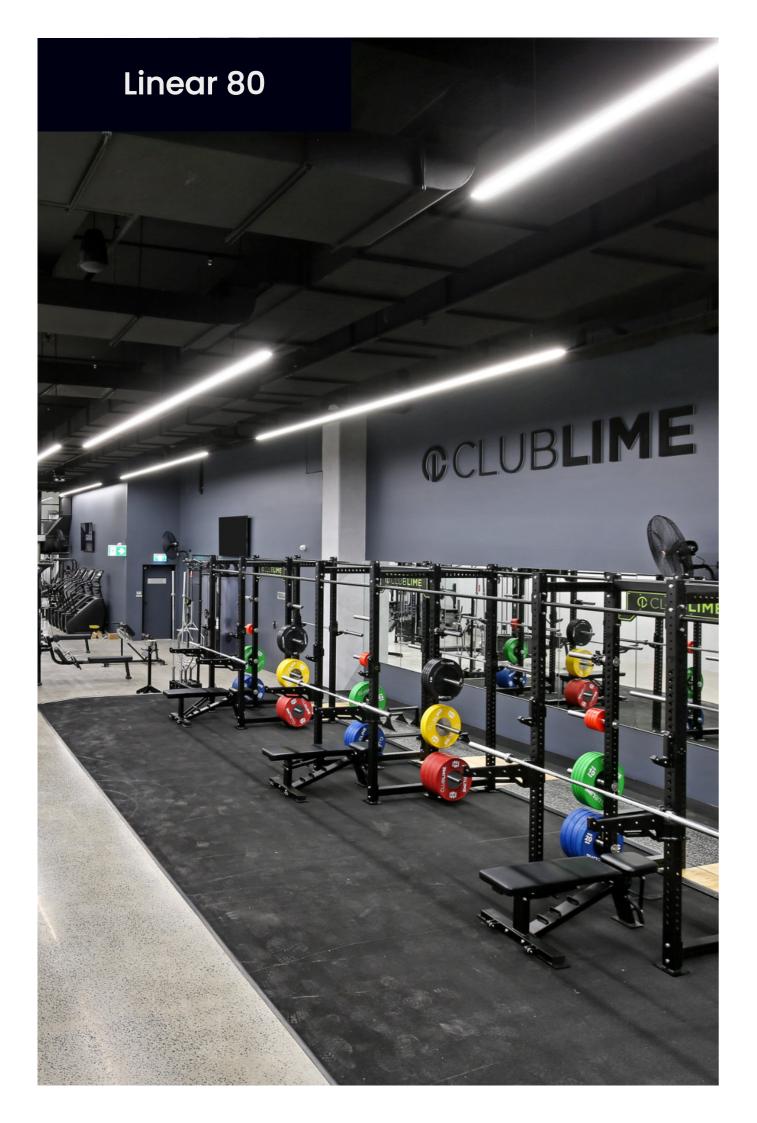





Electrical Configuration:

- Power Options:
- 15 Watts /m
- 17 Watts /m
- 22 Watts /m

• 32 Watts /m

IP Rating: in wet areas.

Control gear: Tridonic Constant current LED Driver

Dimming options:

- SwitchDIM
- DALI
- 1-10V

L, T, X & Straight no light leakage joins available.

Physical Characteristics:

Continous lengths up to 3600mm then

• >2000mm = 200mm from each end

• 2100mm+ = 300mm from each end

straight join or junction required.

See below - Suspension positions;

Wire positions can be customised.

Profile:

Lengths:

Mounting:


Diffuser:


Opal PMMA

Junctions:

Finishes:

70mm W x 80mm H





With canopy & ceiling bullets

Linear 80







Made with PCB boards & internal reflector

No light leakage joins



Photometrics:

Lumen packages:

- 15W = 1900 Lm/m
- 17W = 2200 Lm/m
- 22W = 2820 Lm/m
- 32W = 4100 Lm/m

Note. Lumen package can be adjusted as required.

IP20 - For indoor use only. Should not be used

LED type:

Tridonic LED PCB light engine

CRI: CRI 80 (CRI 90+ available)

CCT: 3000K, 4000K, 5000K


Distribution: 110° direct. Diffused




Tarnished Brass

These finishes wont work with your colour scheme? Specify your own.



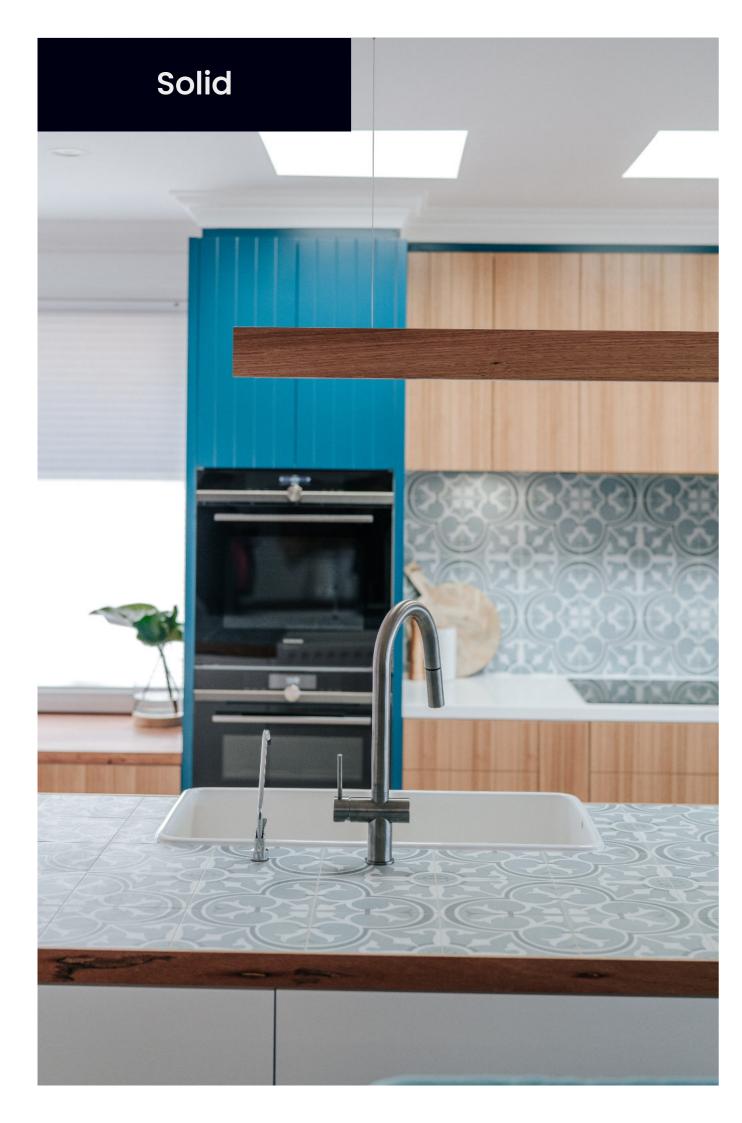



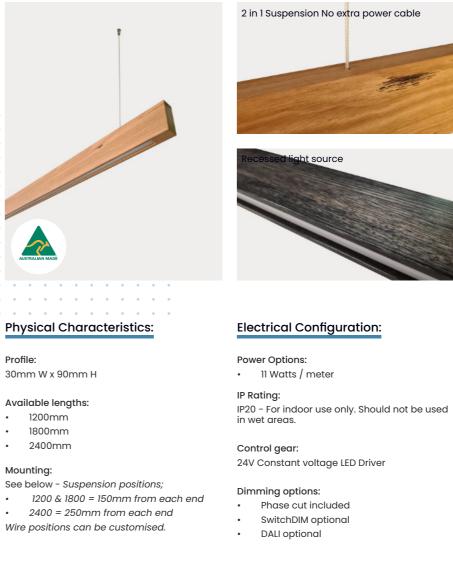


Finishes:

•



Black Japan

Mounting options:



With Canopy (100mm or 70mm DIA)

Solid









Photometric	s:
-------------	----

Lum	ien packages:
•	11W = 1800 Lm/m

LED type:

Tridonic LED flex light engine

CRI: CRI 80 (CRI 90+ available)

CCT: 3000K or 4000K

Distribution: 90° direct. Diffused



French White Wash


Remotely stored driver




Integral driver in canopy



Centre Canopy (500mm L x 80mm W)

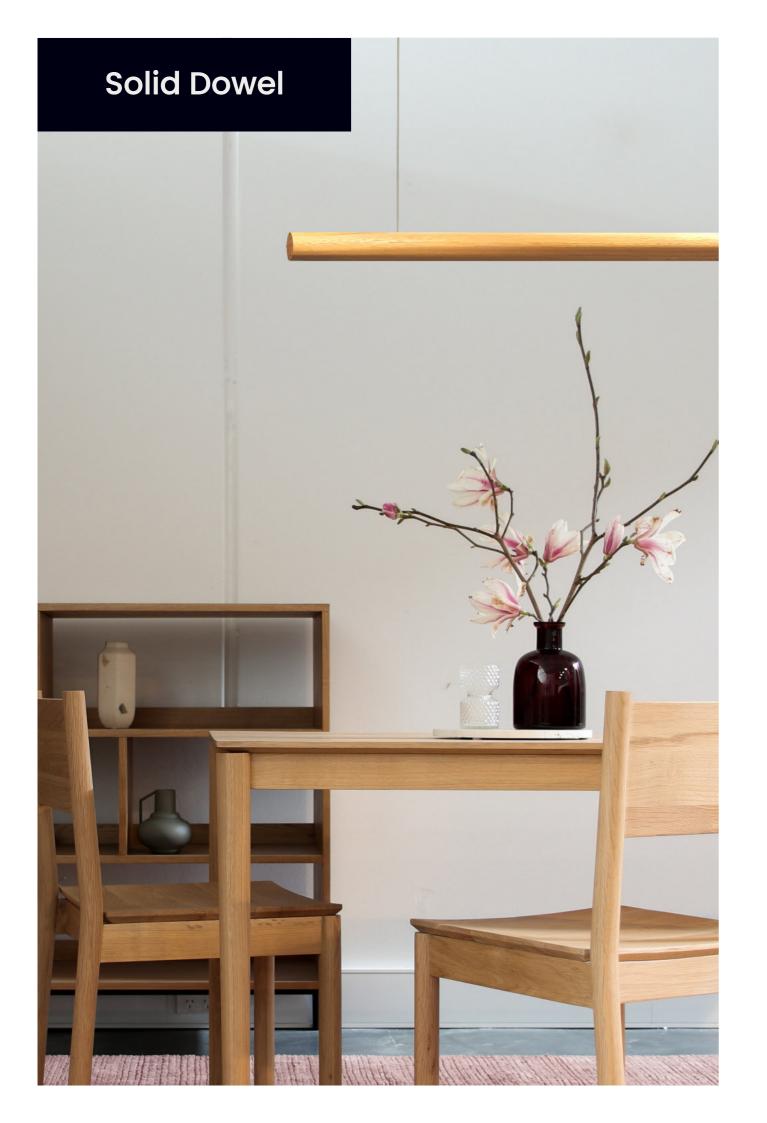



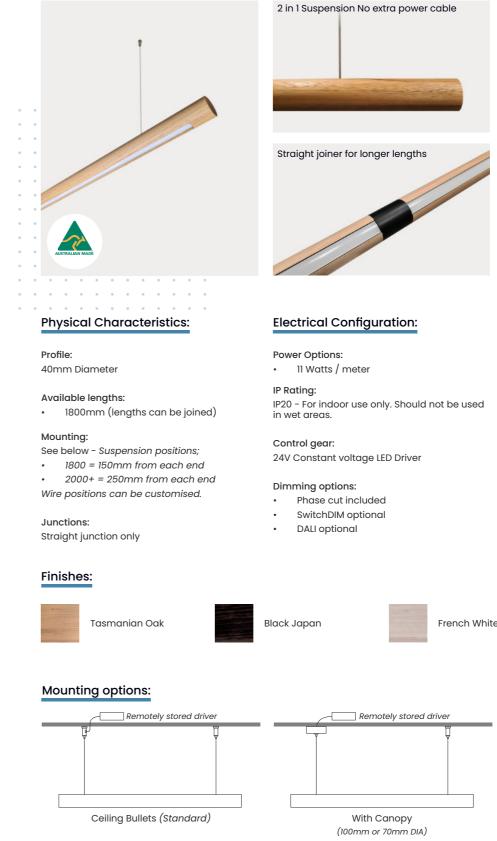

Solid Dowel



Optional end caps



Photometrics:

Lumen packages: • 11W = 1800 Lm/m

LED type: Tridonic LED flex light engine

CRI: CRI 80 (CRI 90+ available)

CCT: 3000K or 4000K

Distribution: 90° direct. Diffused

French White Wash

Integral driver in canopy




Centre Canopy (500mm L x 80mm W)


Bespoke decorative lighting



Click <u>here</u> to go back to the Contents page

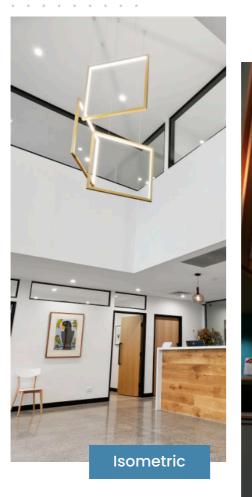



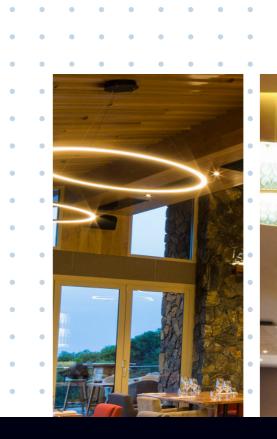




Quality, Quality Quality. It is essential to the success of our business and retaining you as our A grade client. We Guarantee the Quality of our bespoke products by offering up to 3 years warranty.






Å



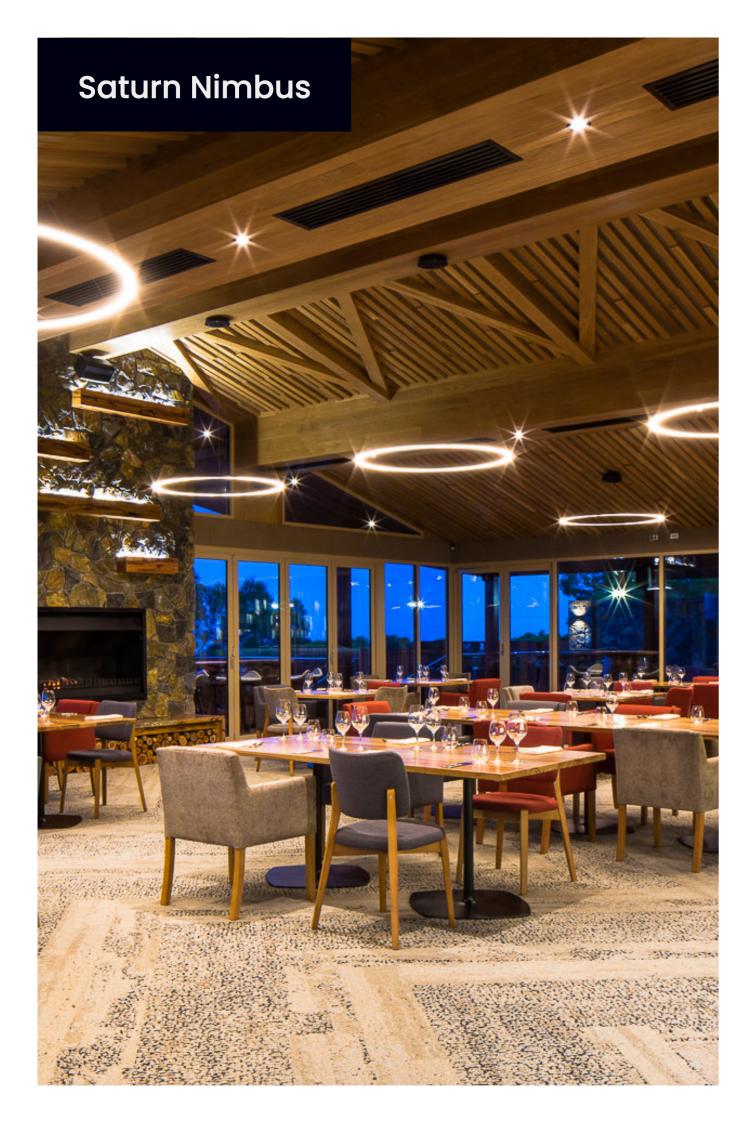





Electrical Configuration:

- Power: • 450mm = 24 Watts
- 600mm = 36 Watts
- 800mm = 42 Watts
 - 1000mm = 60 Watts
 - 1200mm = 65 Watts
- 1500mm = 70 Watts

IP Rating: in wet areas.

Control gear: Constant current LED Driver

Dimming options:

•

•

•

.

Tier options:

Physical Characteristics:

Profile:

.

.

.

.

.

•

.

Diameters:

20mm W x 25mm H

450mm

600mm

800mm

1000mm

1200mm

1500mm

Mounting options:

Single tier nimbus pendants can be combined to create multi-tier pendants.

3 x Wire suspended back to canopy (BTC) 3.0m cable, canopy 240x50mm

3 x Wire suspended direct to ceiling

(DTC) 3.0m cable (remote driver)

DALI optional SwitchDIM

Finishes:


•

- Texture Black Texture White
 - Brushed Gold



(450, 600 & 800mm only)





Tarnished Brass (Available in all sizes & finished to order)

These finishes wont work with your colour scheme? Specify your own.

Saturn Nimbus





Optional up light

IP20 - For indoor use only. Should not be used

• Phase cut included (450, 600 & 800 only) 1-10 Volt (1000 +)

• 24W = 1750 Lumens • 36W = 2600 Lumens

Photometrics:

Lumen packages:

- 42W = 2984 Lumens . .
- 60W = 3300 Lumens 65W = 4000 Lumens •
- 70W = 5100 Lumens •

LED type:

LED PCB light engine


CRI:

CRI 80


CCT: 3000К, 4000К

Distribution:


120° direct. Diffused (Indirect light output available)



Wire suspended (BTC)



Wire suspended (DTC)

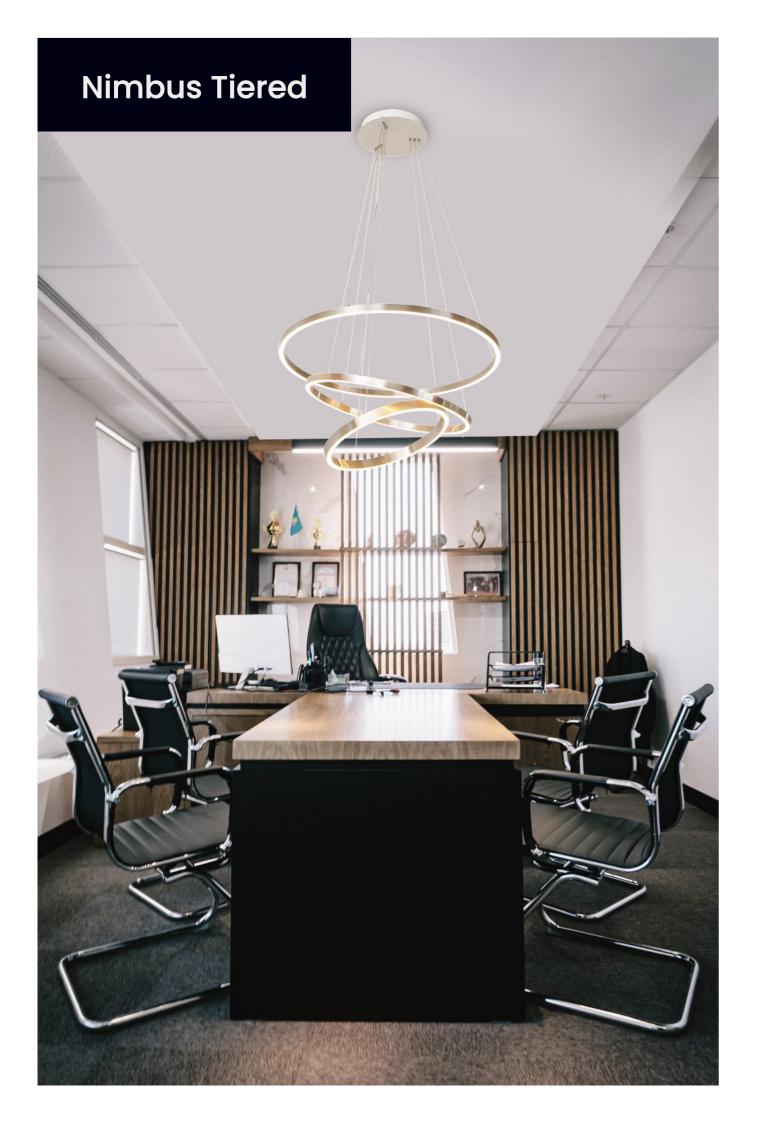

CONTESSA bespoke lighting design

Slimline wire restraints

Electrical Configuration:

•

•

•

•

.

- Power: • 450mm = 24 Watts
- 600mm = 36 Watts
 - 800mm = 42 Watts
 - 1000mm = 60 Watts
- 1200mm = 65 Watts
- 1500mm = 70 Watts

IP Rating: in wet areas.

Tier mounting options:

Physical Characteristics:

- Wire suspended back to canopy (BTC) 3.0m cable, canopy 240x50mm .
- Wire suspended direct to ceiling (DTC) 3.0m cable (remotely stored driver)

Tier options:

Finishes:

Profile:

.

.

.

.

.

•

Diameters:

20mm W x 25mm H

450mm

600mm

800mm

1000mm

1200mm


1500mm

Add any of the single tier pendants listed above to create your own multi-tier pendant.

DALI optional . SwitchDIM •

Dimming options:


Control gear:



















- Brushed Nickel
- (450, 600 & 800mm only)

Tarnished Brass (Available in all sizes & finished to order)

Nimbus Tiered





Optional DTC mounts



Optional up light

IP20 - For indoor use only. Should not be used

Constant current LED Driver

 Phase cut included (450, 600 & 800 only) 1-10 Volt (1000 +)

Photometrics:

Lumen packages:

- 24W = 1750 Lumens
- 36W = 2600 Lumens
- . 42W = 2984 Lumens
- 60W = 3300 Lumens .
- 65W = 4000 Lumens •
- 70W = 5100 Lumens •

LED type:

LED PCB light engine

CRI: CRI 80

CCT: 3000К, 4000К

Distribution:

120° direct. Diffused (Indirect light output available)



Wire suspended (BTC)

Wire suspended (DTC)

Remote driver

Multiple Nimbus rings can be combined to create tiered pendants of up to 7 tiers. Contact your sales representative for more information.







Physical Characteristics:

Profile:

100mm H

Diameters:

.

٠


- 450mm • 600mm
- 750mm
- 900mm
- 1200mm •

Mounting options:

- 3 x Wire suspended back to canopy (BTC) 3.0m cable, canopy 240x50mm
- 3 x Wire suspended direct to ceiling (DTC) 3.0m cable (remote driver)

Finishes below wont work with your colour scheme? Specify your own.

Finishes:

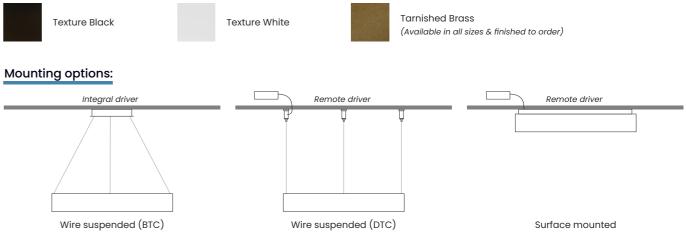

Power: • 450mm = 30 Wa

- 600mm = 40 Wo
- 750mm = 62 Wa
- 900mm = 72 Wa
- 1200mm = 92 Wo

IP Rating:

IP20 - For indoor use in wet areas.

Control gear: Constant current LED I

Dimming options:

 1-10 Volt Included DALI optional

SwitchDIM option

Tel: 1300 887 9448 | Email: sales@contessalighting.com.au | Web: contessalighting.com.au

Ring 100

Electrical Configuration:

Photometrics:

	Lumen packages:	
atts	• 30W = 2175 Lumens	
atts	• 40W = 3620 Lumens	
atts	• 62W = 5456 Lumens	
atts	• 72W = 6336 Lumens	
/atts	• 92W = 8096 Lumens	
	LED type:	
only. Should not be used	LED PCB light engine	
	CRI:	
	CRI 80	
) Driver	CCT:	
	3000K, 4000K	
ed		
	Distribution:	
onal	120° direct. Diffused	





Ring 60





Physical Characteristics:

Profile:

60mm W x 70mm H

The Rina 60 pendants are made to order. Lead times range from 6-12 weeks.

Diameters:

- 600mm •
- 800mm
- 1000mm
- 1200mm
- ٠ 1500mm (2 part)
- 2000mm (3 part) .
- 2400mm (4 part) .
- 3000mm (6 part) •
- 5000mm (8 part) .

Contact us for any larger diameters.

Mounting options:

Wire suspended direct to ceiling (DTC) 2.0m cable with power canopies

Finishes:







Tarnished Brass (Available in all sizes & finished to order)

Mounting options: Remote driver



Wire suspended (BTC) Optional only up to 1200mm

Integral driver*

These finishes wont work with your colour scheme? Specify your own.

Electrical Configuration:

Power:

- 600mm = 38 Watts 800mm = 50 Watts •
- 1000mm = 63 Watts .
- . 1200mm = 75 Watts
- 1500mm = 94 Watts . 2000mm = 126 Watts •
- .
- 2400mm = 151 Watts .
- 3000mm = 188 Watts 5000mm = 314 Watts .
- IP Rating:

.

IP20 - For indoor use only. Should not be used in wet areas.

Control gear: Constant current LED Drivers

Dimming options:

- DALI optional
- SwitchDIM

Lumen packages: 38 W = 3420 Lumens •

Photometrics:

- 50 W = 4500 Lumens .
- . 63 W = 5670 Lumens
- 75 W = 6750 Lumens •
- •
- 94 W = 8460 Lumens .
- 126 W = 11,340 Lumens
- . 151 W = 13,590 Lumens
- . 188 W = 16,920 Lumens •
- 314 W = 28,260 Lumens


LED type: LED PCB light engine

CRI:

CRI 80 CCT: 3000K, 4000K

Distribution: 100° direct. Diffused (Indirect light output available)





Profile:

30mm W x 30mm H

The Ring 30 pendants are made to order. Lead times range from 6-12 weeks.

Diameters:

.

•

•

- 600mm •
- 800mm
- . 1000mm
- 1200mm
- •
- 1500mm
- 2000mm (4 part)
- 2500mm (4 part)
- 3000mm (4 part) .
- 4000mm (4 part)


Contact us for any larger diameters.

Mounting options:

- Wire suspended back to canopy (BTC) • 3.0m cable with canopy
- Wire suspended direct to ceiling (DTC) 3.0m cable with power canopy

Tier options:

Single tier nimbus pendants can be combined to create multi-tier pendants.

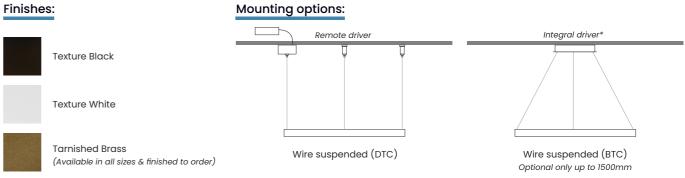

These finishes wont work with your colour scheme? Specify your own.

Electrical Configuration:

Power: 600mm = 36 Wo

- 800mm = 42 Wo
- 1000mm = 60 W
- 1200mm = 65 Wo
- 1500mm = 80 Wo
- 2000mm = 113 W . .


- 2500mm = 142 W
- . 3000mm = 170 V
- 4000mm = 226 •

Ring 30

Photometrics:

Power:	Lumen packages:
 600mm = 36 Watts 	• 36 W = 2600 Lumens
 800mm = 42 Watts 	• 42 W = 2984 Lumens
 1000mm = 60 Watts 	• 60 W = 3300 Lumens
 1200mm = 65 Watts 	• 65 W = 4000 Lumens
 1500mm = 80 Watts 	• 80 W = 6595 Lumens
 2000mm = 113 Watts 	 113 W = 8790 Lumens
 2500mm = 142 Watts 	 142 W = 10,997 Lumens
 3000mm = 170 Watts 	 170 W = 13,190 Lumens
• 4000mm = 226 Watts	• 226 W = 17,595 Lumens
IP Rating: IP20 - For indoor use only. Should not be used in wet areas.	LED type: LED PCB light engine
Control gear: Constant current LED Drivers	CRI: CRI 80
Dimming options: • 1-10 Volt included	ССТ: 3000К, 4000К
DALI optional	Distribution:

(Indirect light output available)

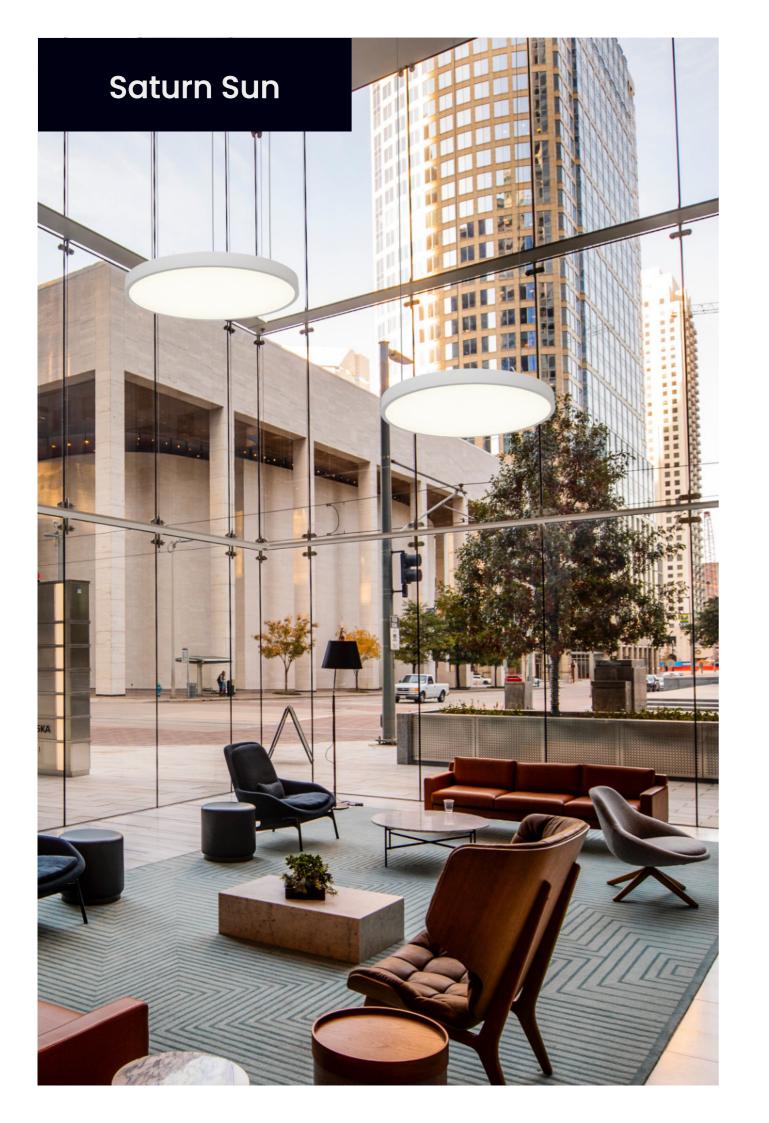

$CONT \equiv SSA$ bespoke lighting design

Physical Characteristics:

Profile: 100mm H

Diameters:

•

.

.

- 450mm
- 600mm
- 750mm
- 900mm .


1200mm

- Mounting options: 3 x Wire suspended back to canopy (BTC) 3.0m cable, canopy 240x50mm

 - 3 x Wire suspended direct to ceiling (DTC) 3.0m cable (remote driver)

Finishes below wont work with your colour scheme? Specify your own.

Finishes:

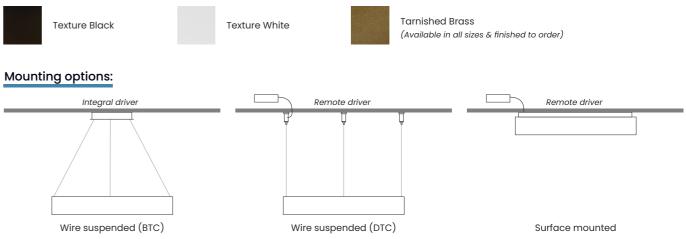

Electrical Configuration:

- Power:
- 450mm = 40 Wo
- 600mm = 50 Wo
- 750mm = 72 Wa • 900mm = 98 Wo
- 1200mm = 147 W

IP Rating:

IP20 - For indoor use in wet areas.

Control gear: Constant current LED

Dimming options:


- 1-10 Volt Included DALI optional
 - SwitchDIM option

Saturn Sun


Photometrics:

atts atts atts atts Vatts	Lumen packages: • 40W = 4021 Lumens • 50W = 5011 Lumens • 72W = 7456 Lumens • 98W = 9898 Lumens • 147W = 10,847 Lumens
only. Should not be used	LED type:
) Driver	CRI: CRI 80 CCT:
ed	3000K, 4000K Distribution:
pnal	120° direct. Diffused



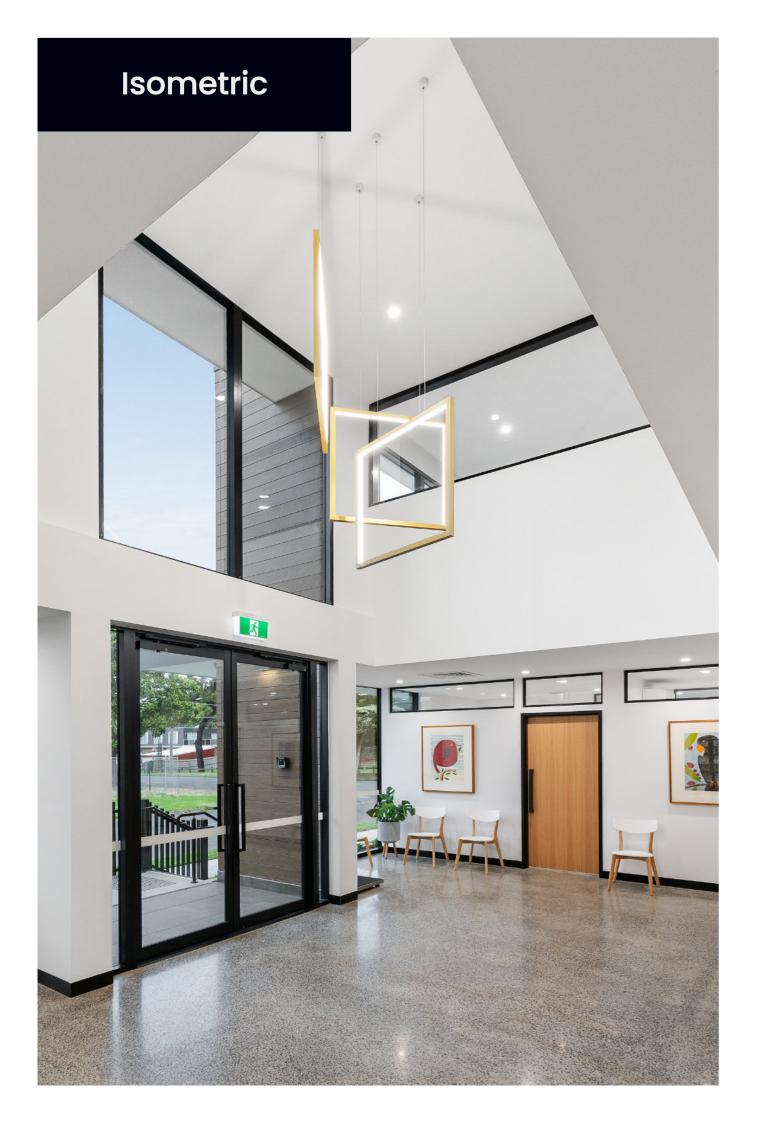

$CONT \equiv SSA$ bespoke lighting design

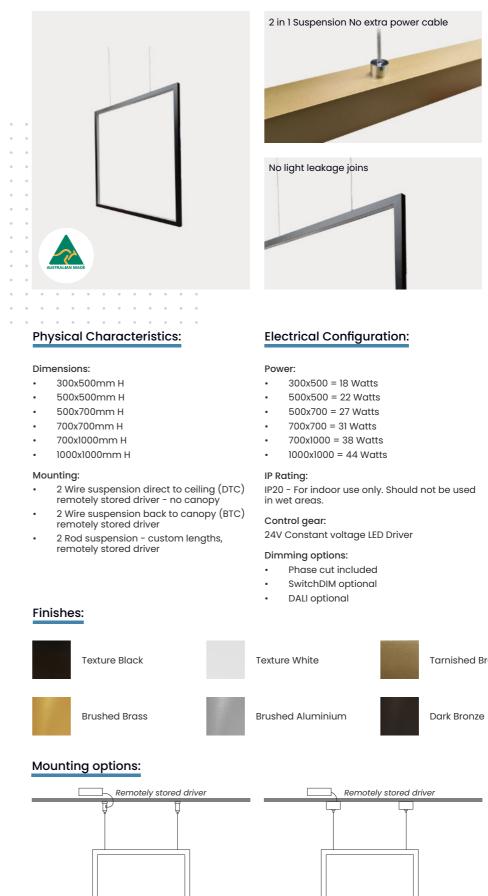

2 x Ceiling bullets (Standard)

Isometric



Optional canopy



Photometrics:

Lumen packages:

- 18 W = 2880 Lumens
- 22 W = 3600 Lumens
- 27 W = 4320 Lumens
- 31 W = 5040 Lumens
- 38 Watts = 6120 Lumens
- 44 Watts = 7200 Lumens

LED type:

Tridonic LED flex light engine

CRI:

CRI 80 (CRI 90+ available)

CCT:

3000K or 4000K

Distribution: 100° direct. Diffused

Tarnished Brass

These finishes wont work with your colour scheme? Specify your own.


Remotely stored driver


2 x Ceiling canopies

Tel: 1300 887 9448 | Email: sales@contessalighting.com.au | Web: contessalighting.com.au





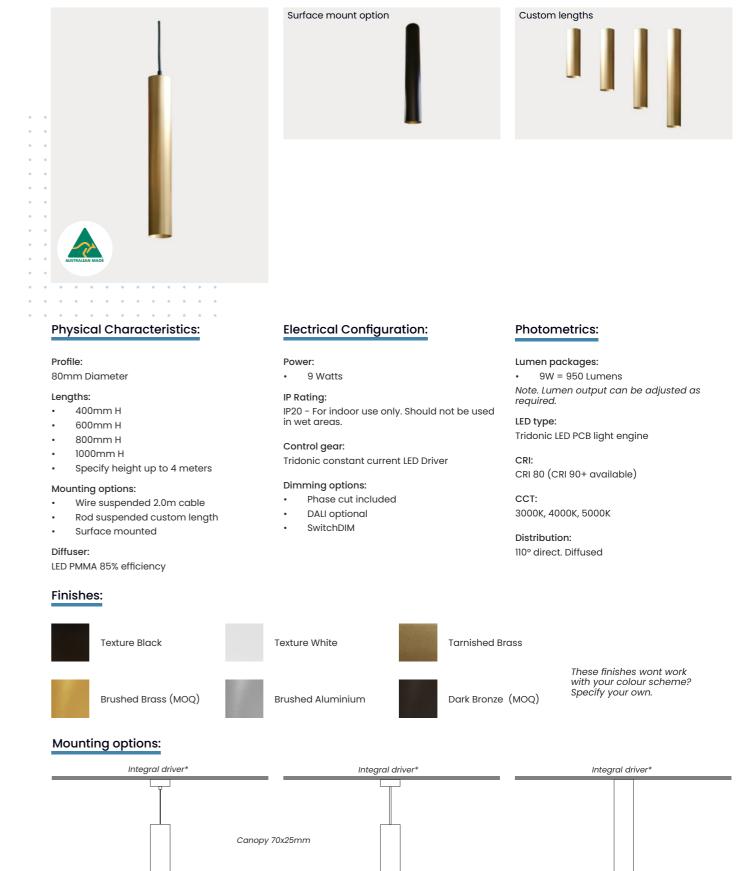



Wire suspended

Tel: 1300 887 9448 | Email: sales@contessalighting.com.au | Web: contessalighting.com.au

Tube 80

only. Should not b	be used

al driver*	Integral driver*	

Rod suspended



.


.

.

.

Tube 60



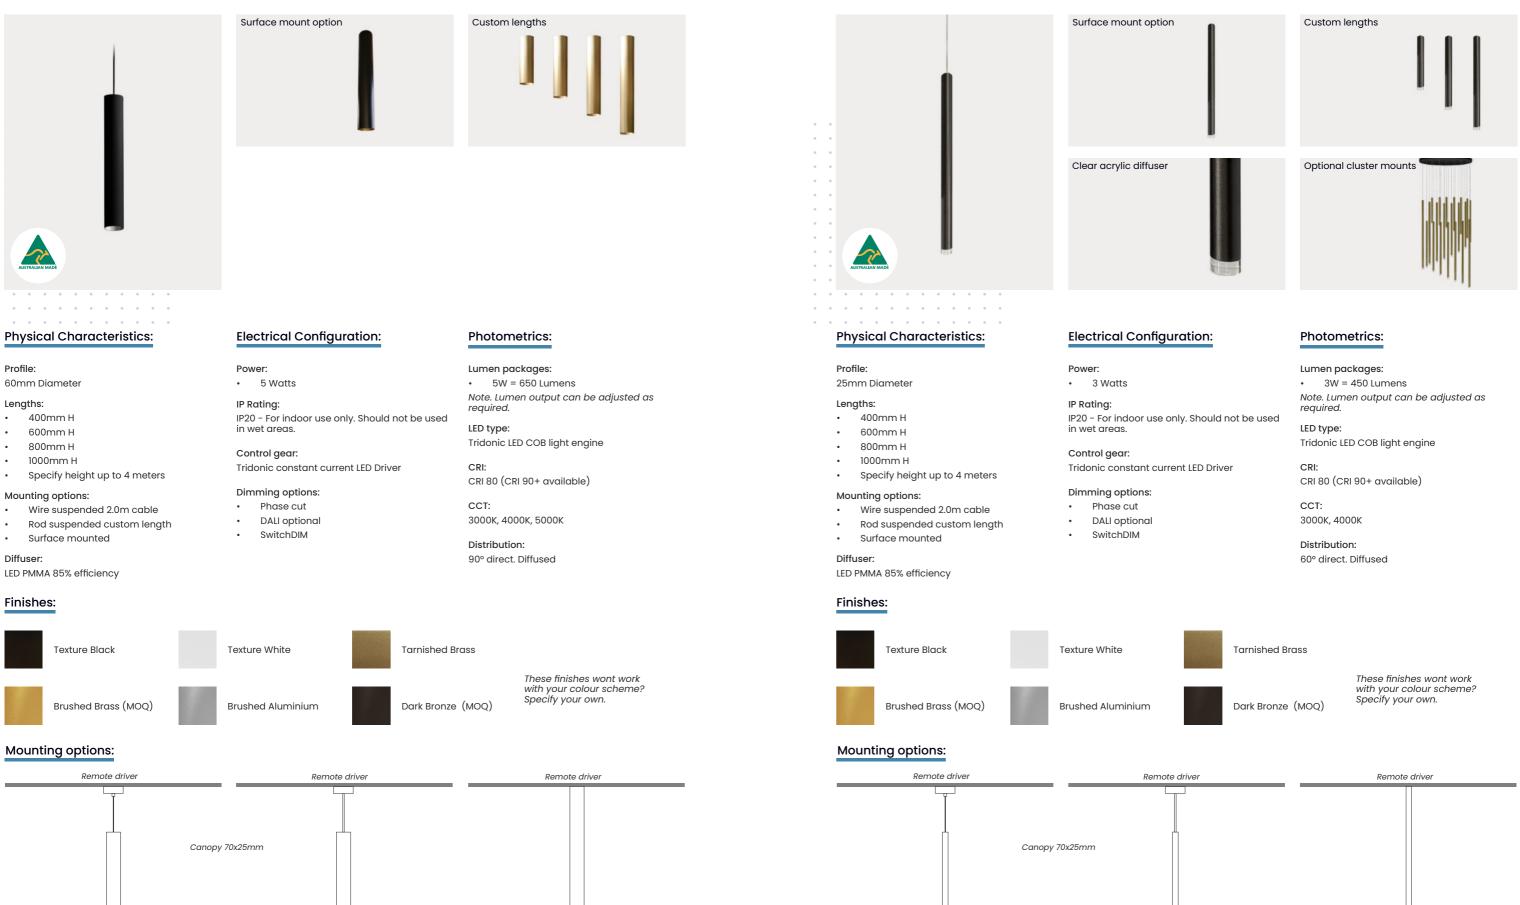

Rod suspended

Wire suspended

Surface Mounted

Wire suspended

Tube 25


te driver	Remote driver	


Rod suspended

Surface Mounted



CONTESSA bespoke lighting design

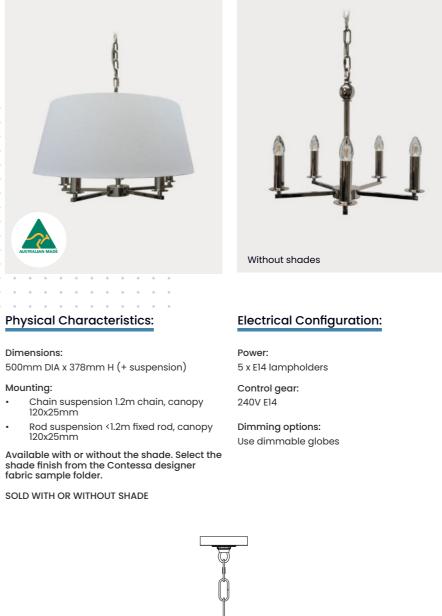



•

.

Romá



Finishes:




Brass



Polished Nickel




Dark Bronze (MOQ 5+ units. Not a stock item)





CONTESSA bespoke lighting design

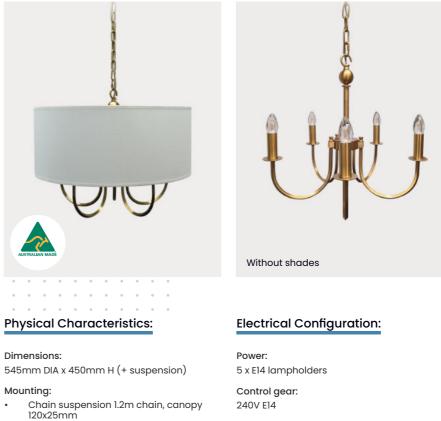

Dimming options:

Available with or without the shade. Select the shade finish from the Contessa designer fabric sample folder.

Rod suspension <1.2m fixed rod, canopy 120x25mm


SOLD WITH OR WITHOUT SHADE

•

•



Use dimmable globes







Finishes:




Brass



Polished Nickel (MOQ 5+ units. Not a stock item)



Dark Bronze (MOQ 5+ units. Not a stock item)

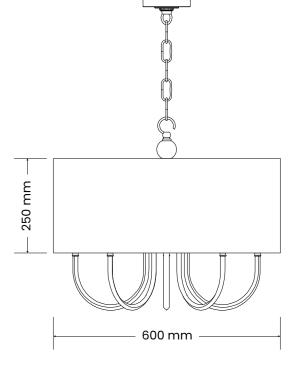







. Physical Characteristics:

Dimensions:


600mm DIA x 350mm H (+ suspension)

Shade size can be adjusted to suit client requirments

Mounting:

- Chain suspension 1.2m chain, canopy 120x25mm •
- Rod suspension <1.2m fixed rod, canopy 120x25mm .

Available with or without the shade. Select the shade finish from the Contessa designer fabric sample folder.



600

Classic Drum





Electrical Configuration:

Finishes:



Brass



Polished Nickel

Use dimmable globes


Power:


3 x E27 lampholder

Dimming options:

Control gear: 240V E27





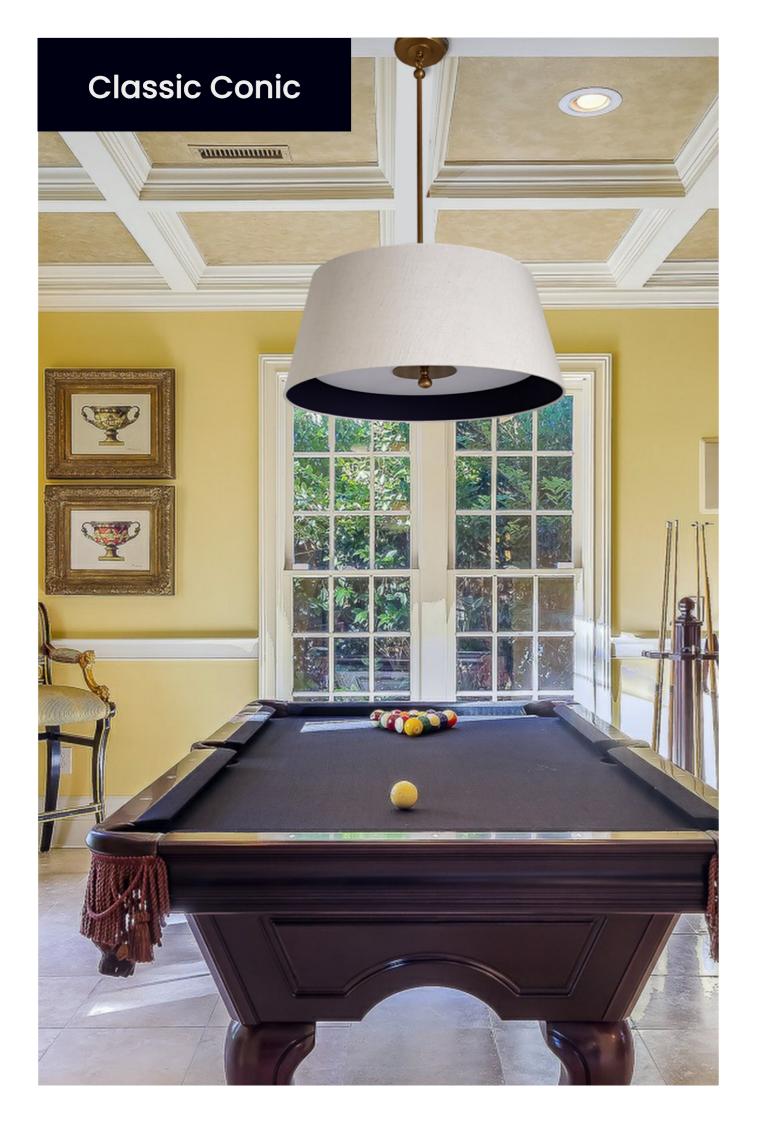





Electrical Configuration:

3 x E27 lampholder

Dimming options:

Control gear: 240V E27

Power:

Dimensions:

Physical Characteristics:


560Bx460Tmm DIA x 350mm H (+ suspension)

Shade size can be adjusted to suit client requirments

Mounting:

- Chain suspension 1.2m chain, canopy 120x25mm •
- . Rod suspension <1.2m fixed rod, canopy 120x25mm

Available with or without the shade. Select the shade finish from the Contessa designer fabric sample folder.



Classic Conic






Finishes:





Brass




Polished Nickel





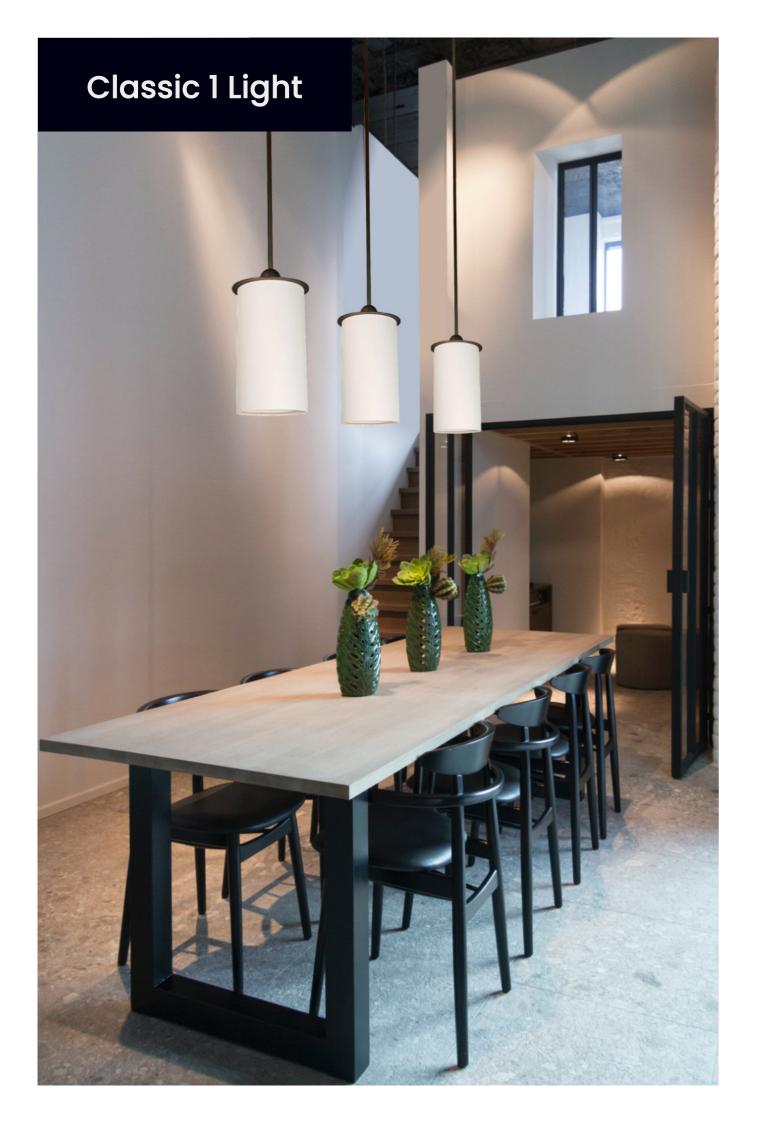





Electrical Configuration:

Dimensions: 180mm DIA x 330mm H (+ suspension)


Physical Characteristics:

Mounting:

~

- Chain suspension 1.2m chain, canopy 120x25mm •
- Rod suspension <1.2m fixed rod, canopy 120x25mm .

Available with or without the shade. Select the shade finish from the Contessa designer fabric sample folder.



Power: 1 x E27 lampholder Control gear: 240V E27

Dimming options: Use dimmable globes

Classic 1 Light





Finishes:





Brass



Polished Nickel





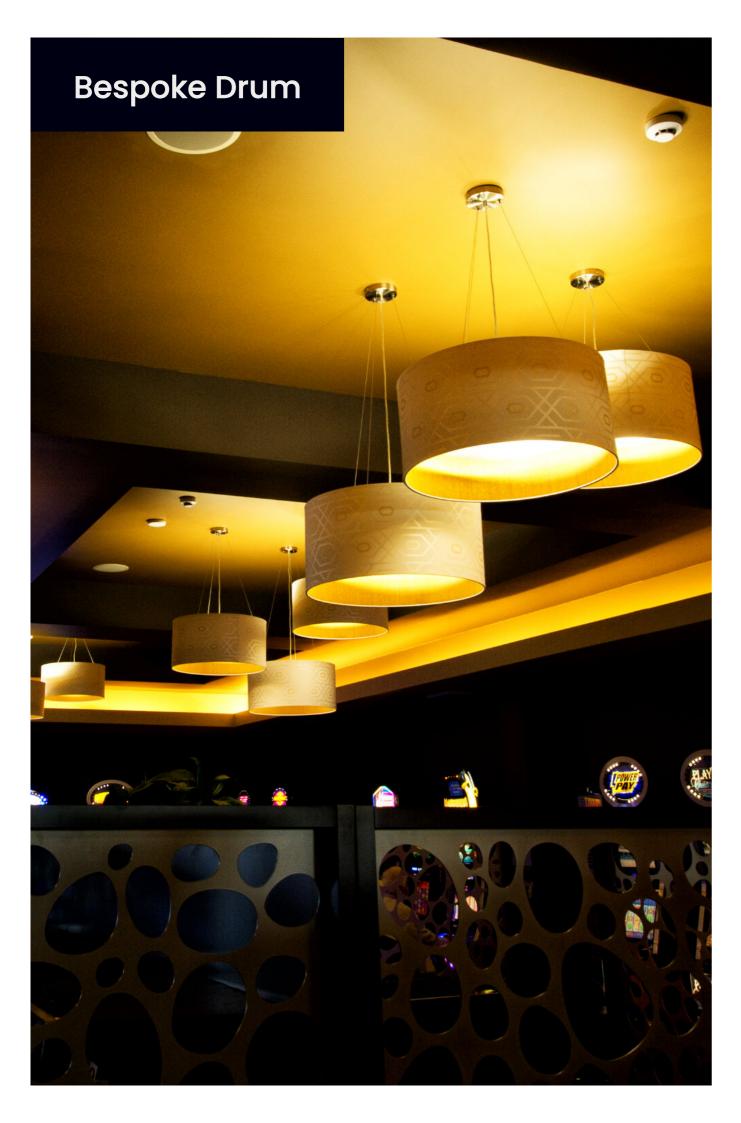





Physical Characteristics:

Dimensions:

Shade size can be adjusted to suit client requirements.

Popular dimensions;

- 400x400x300mm H .
- 600x600x300mm H .
- 800x800x350mm H •
- 1000x1000x350mm H
- . 1200x1200x400mm H

Mounting:

•

.

- Single cord suspension 1.5m, canopy 100x25mm (only up to 650mm)
- 3 Wire + power flex suspension 1.5m, . canopy 120x25mm (back to canopy BTC)
- 3 Wire + power flex suspension 1.5m, canopy 120x25mm (direct to ceiling DTC)
- Rod Suspension (fixed custom lengths in black, white or satin nickel rod)

Diffusers:

- Opal acrylic matt diffusers
- Full base (no interior lining)
- . Floating (flush at base with 1" gap from edge of shade)
- Recessed (diffuser recessed up inside shade with internal lining)



.

.

•

Single cord

Tel: 1300 887 9448 | Email: sales@contessalighting.com.au | Web: contessalighting.com.au

Electrical Configuration:

Typical power:

- 1 Light = 9 Watts
- 2 Light = 18 Watts
- 3 Light = 27 Watts
- 4 Light = 36 Watts
- LED Panel = 40 Watts

Control gear:

Dimming options:

Use dimmable globes or, Phase cut, switchdim or DALI with LED panel.

Photometric's:

Typical lumens:

- 9 Watts = 850 Lumens .
 - 18 Watts = 1700 Lumens
 - 27 Watts = 2550 Lumens
- 36 Watts = 3400 Lumens
- LED Panel = 4020 Lumens

CCT:

3000K or 4000K

Distribution: Direct & indirect - 360° Diffused.

Mounting options:



Bespoke Drum





240V E27 or CC Driver for LED panel

3 x Wire suspended (BTC) Fixed rod

Metal-ware finishes:



Black

White




Satin Nickel

Exterior & interior lining materials can be selected from Contessa's designer fabric range or the client can supply their own.



CONTESSA bespoke lighting design



Physical Characteristics:

Dimensions:

Shade size can be adjusted to suit client requirements.

Popular dimensions;

- . 550x450x300mm H
- 600x500x350mm H .
- 800x700x400mm H •
- . 1000x800x400mm H
- . 1500x1200x600mm H

Mounting:

•


.

- Single cord suspension 1.5m, canopy 100x25mm (only up to 650mm)
- 3 Wire + power flex suspension 1.5m, canopy 120x25mm (back to canopy BTC)
- 3 Wire + power flex suspension 1.5m, canopy 120x25mm (direct to ceiling DTC)
- Rod Suspension (fixed custom lengths in black, white or satin nickel rod)

Diffusers:

- Opal acrylic matt diffusers Floating (flush at base with 1" gap from .
 - edge of shade) Recessed (diffuser recessed up inside
 - shade with internal lining)

Mounting options:



Single cord

Bespoke Conic





Electrical Configuration:

 1 Light = 9 Watts • 2 Light = 18 Watts • 3 Light = 27 Watts • 4 Light = 36 Watts

Typical power:

Control gear:

Dimming options:

Photometric's:

Typical lumens:

3000K or 4000K

Distribution:

.

.

.

•

CCT:


• LED Panel = 40 Watts

240V E27 or CC Driver for LED panel

Use dimmable globes or, Phase cut, switchdim or DALI with LED panel.

> 9 Watts = 850 Lumens 18 Watts = 1700 Lumens 27 Watts = 2550 Lumens 36 Watts = 3400 Lumens LED Panel = 4020 Lumens

Direct & indirect - 360° Diffused.

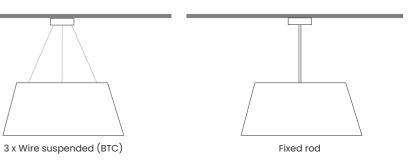

Metal-ware finishes:




Black

White



Satin Nickel

Exterior & interior lining materials can be selected from Contessa's designer fabric range or the client can supply their own.

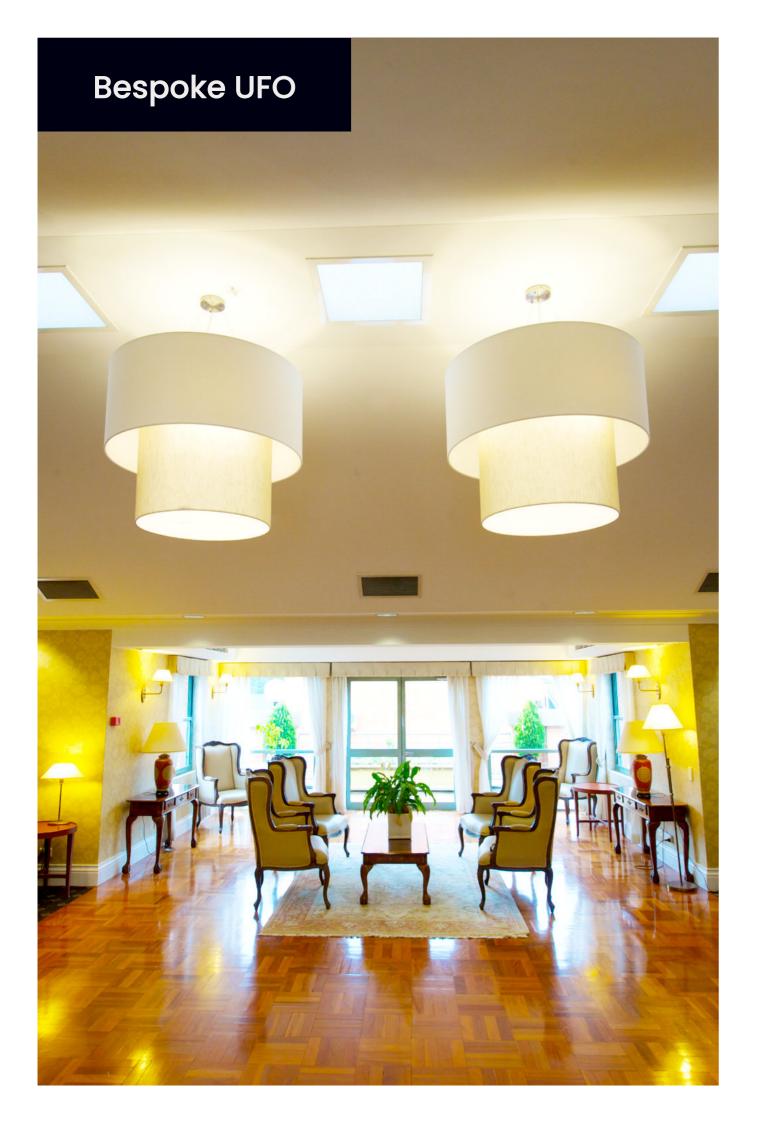

CONTESSA bespoke lighting design



Electrical Configuration:

Typical power:

Control gear:

Dimming options:

Shade size can be adjusted to suit client 1 Light = 9 Watts requirements.

Popular dimensions;

Dimensions:

500/350x400mm H •

Physical Characteristics:

- 600/400x500mm H
- 800/600x600mm H •
- 900/600x800mm H
- . 1100/700x800mm H

Mounting:

•

.

.

.

- Single cord suspension 1.5m, canopy 100x25mm (only up to 600mm)
- 3 Wire + power flex suspension 1.5m,
- Rod Suspension (fixed custom lengths in

Diffusers:

- Opal acrylic matt diffusers
- Full diffuser
 - Recessed (diffuser recessed up inside inner shade with internal lining)

Distribution:

Mounting options:

- Single cord

Photometric's:

•

- canopy 120x25mm (back to canopy BTC) Typical lumens:
- 3 Wire + power flex suspension 1.5m, canopy 120x25mm (direct to ceiling DTC)
- . black, white or satin nickel rod)

. 27 Watts = 2550 Lumens .

- 36 Watts = 3400 Lumens LED Panel = 4020 Lumens
- •

CCT: 3000K or 4000K

Direct & indirect - 360° Diffused.

Tel: 1300 887 9448 | Email: sales@contessalighting.com.au | Web: contessalighting.com.au

Bespoke UFO





• 2 Light = 18 Watts • 3 Light = 27 Watts • 4 Light = 36 Watts

• LED Panel = 40 Watts

240V E27 or CC Driver for LED panel

Use dimmable globes or, Phase cut, switchdim or DALI with LED panel.

> 9 Watts = 850 Lumens 18 Watts = 1700 Lumens

3 x Wire suspended (BTC) Fixed rod

Metal-ware finishes:



Black





Satin Nickel

Exterior & interior lining materials can be selected from Contessa's designer fabric range or the client can supply their own.



Bespoke Multi





Physical Characteristics:

Dimensions:

Shade size can be adjusted to suit client requirements.

Popular dimensions;

- 600Wx500mm H .
- 800Wx600mm H .
- 1000Wx600mm H .
- 1200Wx750mm H

Mounting:

- Single cord suspension 1.5m, canopy 100x25mm (*only up to 600mm*)
- 3 Wire + power flex suspension 1.5m, canopy 120x25mm (back to canopy BTC)
- 3 Wire + power flex suspension 1.5m, canopy 120x25mm (direct to ceiling DTC)
- Rod Suspension (fixed custom lengths in black, white or satin nickel rod)

Diffusers:

Opal acrylic matt diffusers

- Full diffuser
- Recessed (diffuser recessed up inside inside shade with internal lining)





Electrical Configuration:

Typical power:

- 1 Light = 9 Watts
- 2 Light = 18 Watts
- 3 Light = 27 Watts
- 4 Light = 36 Watts
- LED Panel = 40 Watts •

Control gear:

240V E27 or CC Driver for LED panel

Dimming options:

Use dimmable globes or, Phase cut, switchdim or DALI with LED panel.


Photometric's:

Typical lumens:

•

.

- 9 Watts = 850 Lumens
- 18 Watts = 1700 Lumens
- 27 Watts = 2550 Lumens
- 36 Watts = 3400 Lumens



3 x Wire suspended (BTC)

Distribution:



Metal-ware finishes:



Exterior & interior lining materials can be selected from Contessa's designer fabric range or the client can supply their own.



Physical Characteristics:

Dimensions:

Shade size can be adjusted to suit client requirements.

Popular dimensions;

- 600/500x300mm H .
- 800/700x300mm H •
- 900/800x300mm H .
- 1000/900x350mm H
- . 1200/1100x400mm H


Mounting

- Single cord suspension 1.5m, canopy 100x25mm (only up to 600mm)
- 3 Wire + power flex suspension 1.5m, canopy 120x25mm (back to canopy BTC)
- 3 Wire + power flex suspension 1.5m, canopy 120x25mm (direct to ceiling DTC)
- Rod Suspension (fixed custom lengths in

- shade with internal lining)

Distribution:

Mounting options:



Tel: 1300 887 9448 | Email: sales@contessalighting.com.au | Web: contessalighting.com.au

Fixed rod

Tel: 1300 887 9448 | Email: sales@contessalighting.com.au | Web: contessalighting.com.au

. 27 Watts = 2550 Lumens 36 Watts = 3400 Lumens . LED Panel = 4020 Lumens • CCT: 3000K or 4000K Direct & indirect - 360° Diffused.

.

Typical power:

Control gear:

Dimming options:

Photometric's:

Typical lumens:

•


black, white or satin nickel rod) Diffusers:

Opal acrylic matt diffusers


- Full diffuser
- Recessed (diffuser recessed up inside







Direct & indirect - 360° Diffused.



Bespoke Halo



5



Electrical Configuration:

 1 Light = 9 Watts 2 Light = 18 Watts • 3 Light = 27 Watts • 4 Light = 36 Watts

LED Panel = 40 Watts

240V E27 or CC Driver for LED panel

Use dimmable globes or, Phase cut, switchdim or DALI with LED panel

> 9 Watts = 850 Lumens 18 Watts = 1700 Lumens

3 x Wire suspended (BTC) Fixed rod

Metal-ware finishes:



Black

White



Satin Nickel

Exterior & interior lining materials can be selected from Contessa's designer fabric range or the client can supply their own.



Bespoke Cilindro





. Physical Characteristics:

Dimensions:

Shade size can be adjusted to suit client requirements.

Popular dimensions;

- 300x300x500mm H .
- 325x325x600mm H •
- 350x350x750mm H .
- 400x400x1200mm H
- . 400x400x1800mm H

Mounting:

- Single cord suspension 1.5m, canopy 100x25mm
- 3 Wire + power flex suspension 1.5m, . canopy 120x25mm (back to canopy BTC)
- 3 Wire + power flex suspension 1.5m, canopy 120x25mm (direct to ceiling DTC) Rod Suspension (fixed custom lengths in
- black, white or satin nickel rod)

Diffusers:

- Opal acrylic matt diffusers
- Full diffuser only

Electrical Configuration:

- Power:
- 500mm = 20 Watts
- 600mm = 24 Watts
- 750mm = 32 Watts
- 1200mm = 53 Watts •
- 1800mm = 77 Watts •

Control gear

CV 24V Driver

Dimming options: Phase cut included switchdim or DALI optional

Photometric's:

- Typical lumens:
- 20 Watts = 2880 Lumens
- . 24 Watts = 3600 Lumens
- 32 Watts = 4680 Lumens
- 53 Watts = 7920 Lumens .
- 77 Watts = 11,520 Lumens •


CCT:

3000K or 4000K

Distribution:

Direct & indirect - 360° Diffused.

Mounting options:

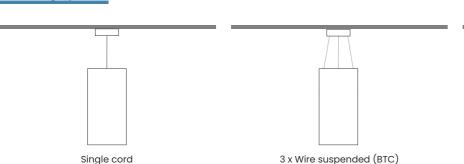



Metal-ware finishes:



Exterior & interior lining materials can be selected from Contessa's designer fabric range or the client can supply their own.

White



Dimensions: Shade size can be adjusted to suit client requirements.

Popular dimensions;

- 1040x430x480mm H (Straight Spa) .
- . 1200x350x300mm H (Tapered Spa)
- 1400x350x300mm H (Tapered Spa) •

Custom dimensions can be specified

Mounting:

- 2 Wire + power flex suspension 1.5m, canopy 120x25mm (direct to ceiling DTC)
- 2 Rod Suspension (fixed custom lengths
- in black, white or satin nickel rod)

Diffusers:

- Opal acrylic matt diffusers
- Full diffuser (only straight sided Spa's) Recessed (diffuser recessed up inside inside shade with internal linina)

CCT: 3000K or 4000K

•

.

.

.

Typical power:

Control gear:

Dimming options:

Photometric's:

Typical lumens:

Use dimmable globes or,

240V E27

Distribution: Direct & indirect - 360° Diffused.

Mounting options:

2 Wire suspension

Fixed rod

Tel: 1300 887 9448 | Email: sales@contessalighting.com.au | Web: contessalighting.com.au

Bespoke Spa





Electrical Configuration:

• 2 Light bar = 18 Watts • 3 Light bar = 27 Watts • 4 Light bar = 36 Watts

• 5 Light bar = 45 Watts

Phase cut, switchdim or DALI with LED panel.

Metal-ware finishes:



Black

White




Satin Nickel

Exterior & interior lining materials can be selected from Contessa's designer fabric range or the client can supply their own.

18 Watts = 1700 Lumens 27 Watts = 2550 Lumens

36 Watts = 3400 Lumens

45 Watts = 4250 Lumens



2 Rod suspension



Bespoke Cubic







Physical Characteristics:

Dimensions:

Shade size can be adjusted to suit client requirements.

Popular dimensions;

- 500x500x300mm H .
- 600x600x300mm H •
- 700x700x350mm H .
- 800x800x400mm H
- . 900x900x400mm H

Mounting:

- 4 Wire + power flex suspension 1.5m, canopy 120x25mm (back to canopy BTC)
- 4 Wire + power flex suspension 1.5m, canopy 120x25mm (direct to ceiling DTC)
- Rod Suspension (fixed custom lengths in black, white or satin nickel rod)

Diffusers:

Opal acrylic matt diffusers

Mounting options:

- Full diffuser
- Recessed (diffuser recessed up inside inside shade with internal lining)

4 x Wire suspended (BTC)



Electrical Configuration:

Typical power:

- 2 Light = 18 Watts
- 3 Light = 27 Watts
- 4 Light = 36 Watts

Control gear:

240V E27

Dimming options: Use dimmable globes or, Phase cut, switchdim or DALI with LED panel.

Photometric's:

- Typical lumens:
- 18 Watts = 1700 Lumens
- 27 Watts = 2550 Lumens .
- 36 Watts = 3400 Lumens

CCT: 3000K or 4000K

•

Distribution:

Direct & indirect - 360° Diffused.

4 x Wire suspended (DTC)



Metal-ware finishes:



Exterior & interior lining materials can be selected from Contessa's designer fabric range or the client can supply their own.



Physical Characteristics:

Dimensions:

Shade size can be adjusted to suit client requirements.

Popular dimensions;

- . 500x500x250mm H
- . 700x700x250mm H
- 900x900x300mm H •

Mounting:


•

- 3 Wire + power flex suspension 1.5m, canopy 120x25mm (back to canopy BTC)
- 3 Wire + power flex suspension 1.5m, canopy 120x25mm (direct to ceiling DTC)
- Rod Suspension (fixed custom lengths in black, white or satin nickel rod)

Diffusers:

- Opal acrylic matt diffusers
- Full diffuser
- Recessed (diffuser recessed up inside inside shade with internal lining)

Mounting options:

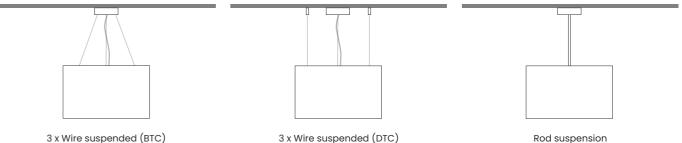


Tel: 1300 887 9448 | Email: sales@contessalighting.com.au | Web: contessalighting.com.au

Rod suspension

Tel: 1300 887 9448 | Email: sales@contessalighting.com.au | Web: contessalighting.com.au







Bespoke Trix





Electrical Configuration:

• 3 Light bar = 27 Watts

Typical power:

Control gear:

Dimming options:

Photometric's:

Typical lumens:

3000K or 4000K

Distribution:

.

CCT:

240V E27

Use dimmable globes or, Phase cut, switchdim or DALI with LED panel.

Metal-ware finishes:



Black

White



Satin Nickel

Exterior & interior lining materials can be selected from Contessa's designer fabric range or the client can supply their own.


27 Watts = 2550 Lumens

Direct & indirect - 360° Diffused.



Earth 450



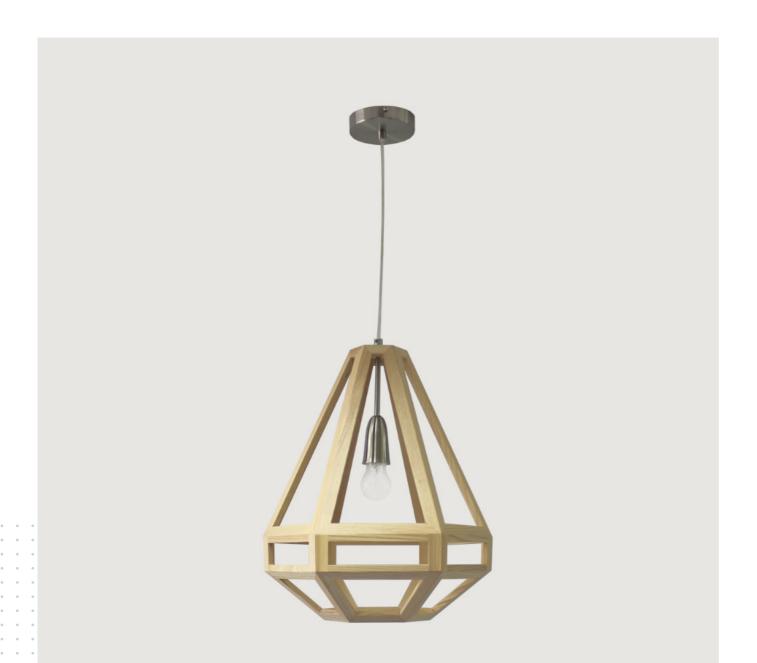

Physical Characteristics:

Pendant height: 480mm

Pendant width: 350mm

Finish:

Recycled Ash

Suspension: 1.5m clear cord + 100mm satin nickel canopy

Electrical Configuration:

Power: 1 x Light globe (not included)

Lampholder:

240V B22

Product ID:

Code: E450NA-PD



Physical Characteristics:

Pendant height: 250mm

Pendant width: 370mm

Power: 1 x Light globe (not included)

Lampholder:

240V B22

Suspension: 1500mm finish chain + 100mm canopy

Finishes:



Chrome

Deiner

Electrical Configuration:

Product ID:

Codes: Antique Brass - D370AB-PD Chrome - D370CH-PD Copper - D370CO-PD



Copper


Quality Time Value



Click here to go back to the Contents page











Custom Lighting Design

We have been crafting lights for over 70 years. Only the highest quailty materials are used in production of our products including materials sourced from Europe, the United States and Australia.



Wall Lights





Francis



Hoop Set





Physical Characteristics:

Dimensions:

Shade size can be adjusted to suit client requirements.

Popular dimensions;

- 200x250mm H
- 250x300mm H


Mounting:


• Wall mounted back plate

Finishes:

Finishes can be selected from the Contessa range of materials, specified from a fabric house or supplied by the client.

Dimensions:





Electrical Configuration:

Typical power:

Control gear:

240V E27 Globe or

Dimming options:


• 1 Light = 9 Watts

• LED Panel = 12 Watts

LED CC driver (LED panel)

Use dimmable globes or,

LED panel - DALI or switchDIM







Photometric's:

Typical lumens:

- 9 Watts = 650 Lumens
- 12 Watts = 1000 L:umens

CCT: 3000K or 4000K

Distribution: Direct & indirect - 270° Diffused.



Dimensions:

Shade size can be adjusted to suit client requirements.

Popular dimensions;

- 200x250mm H
- 250x300mm H •


Mounting:

• Wall mounted back plate

Finishes:

Finishes can be selected from the Contessa range of materials, specified from a fabric house or supplied by the client.

Dimensions:



Electrical Configuration:

Typical power: • 1 Light = 9 Watts • LED Panel = 12 Watts

> Control gear: 240V E27 Globe or LED CC driver (LED panel)

Dimming options: Use dimmable globes or, LED panel - DALI or switchDIM

Elliptic Set





Photometric's:

Typical lumens:


- 9 Watts = 650 Lumens
- 12 Watts = 1000 Lumens

CCT:

3000K or 4000K

Distribution:

Direct & indirect - 270° Diffused.

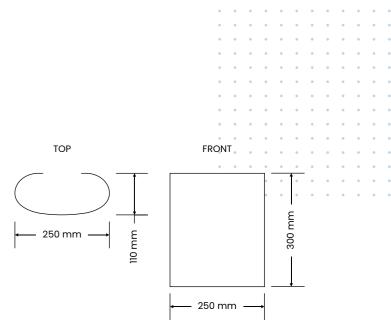



Rd Corner Square Set





Physical Characteristics:

Dimensions: Shade size can be adjusted to suit client requirements.

Popular dimensions;

- 200x250mm H
- 250x300mm H


Mounting:


• Wall mounted back plate

Finishes:

Finishes can be selected from the Contessa range of materials, specified from a fabric house or supplied by the client.

Dimensions:





Electrical Configuration:

Typical power:

Control gear:

240V E27 Globe or

Dimming options:


• 1 Light = 9 Watts

• LED Panel = 12 Watts

LED CC driver (LED panel)

Use dimmable globes or,

LED panel - DALI or switchDIM





Photometric's:

Typical lumens:

- 9 Watts = 650 Lumens
- 12 Watts = 1000 Lumens

CCT: 3000K or 4000K

Distribution: Direct & indirect - 270° Diffused.

Brass Wall Lights:


Custom made to order with a minimum quantity of 10+ units for commercial projects, Contessa offers a range of solid brass wall lights that can be specified in Brushed Brass, Dark Bronze and Polished Nickel. A Selection of the wall lights are below. Check our website for the complete range and indivdual specifications.





Highland




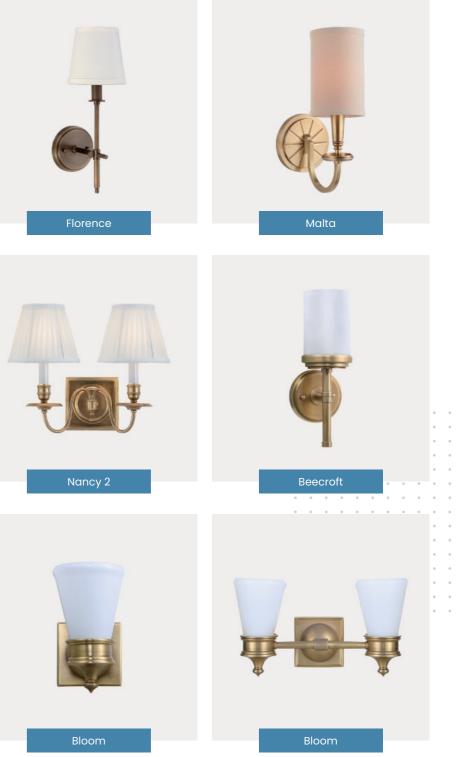







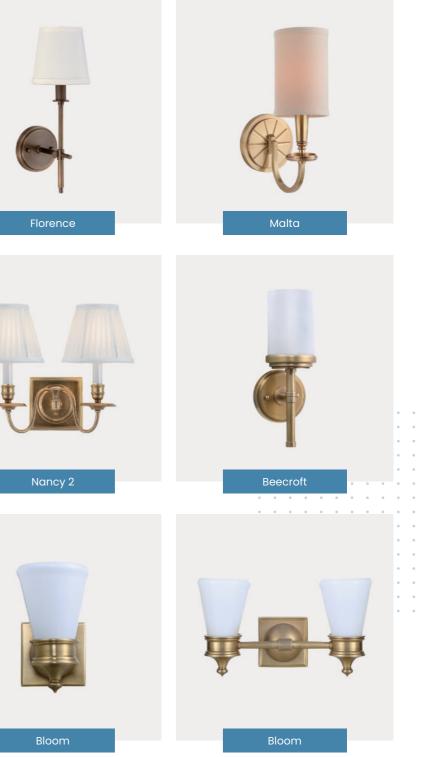


300


Brass Wall Lights


Have a question? Ask online.

Click <u>here</u> to go back to the Contents page







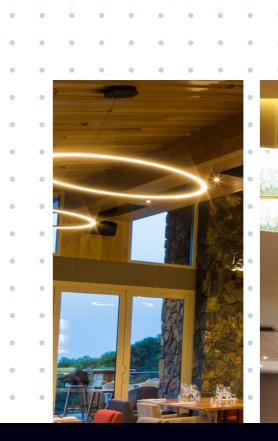



Our purpose built state of the art manufacturing facility in Wollongong NSW produces our custom linear LED systems, Tube pendants, lampshades and bespoke fabric pendants amoungst others.

We are always progressing to become a 100% Australian Made lighting supplier.





ģ




Bespoke Shades



Physical Characteristics:

Any profiles listed below can be manufactured using standard or any size combinations. Pendant & shade diagrams are a guide to assist in shape selection. If no profiles listed below fit your design planning, please submit a design concept to our sales team for appraisal at sales@contessalighting.com.au.

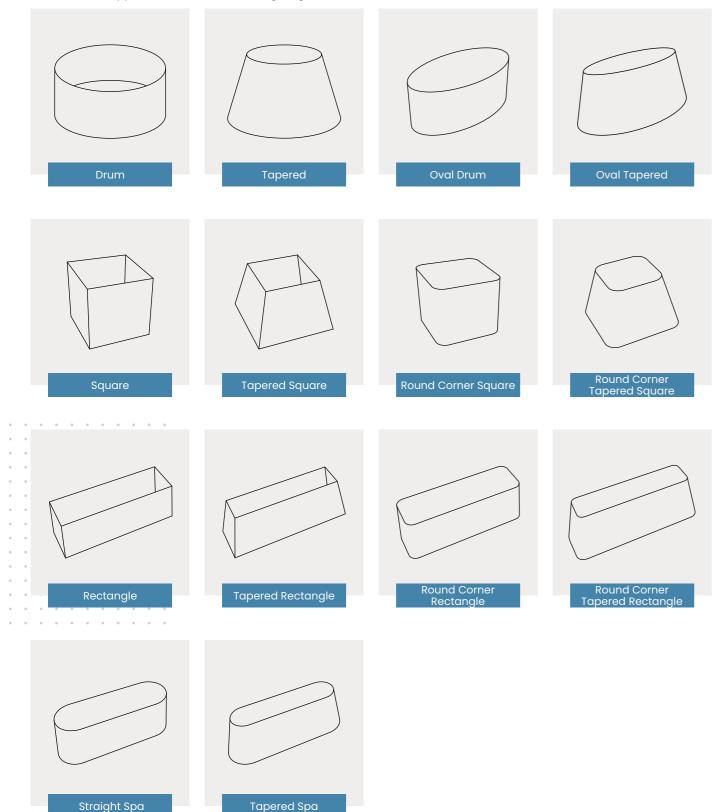


Finshes:

Contessa has a comprehensive range of materials for bespoke products. These include fabrics, metallic plastics, parchments and wallpapers. Materials can also be specifyied from most fabric houses in Australia or New Zeland.




Ring Sizes:

There are currently three ring types available, standard Australian fit, American finial fit and European fit. A combination of ring types can be used in shades (e.g Australian base fit with finial top fit).



Convert Shades to Pendants:




Single clear flex can be used as a suspension system on pendants up to 30"(760mm) in diameter. Any size combination over 30" need stainless wires as support or specify a rod system. Clear flex & stainless aircraft wire can be used as a suspension system on any size pendant. There are two versions of this system Back to Canopy (BTC) or Direct to Ceiling (DTC).

Bespoke Shades










Fixed rods are entirely custom made to order. To specify a fixed rod, work out the total drop from the ceiling to where the base of the shade should sit and we will do the rest.



Close to ceiling pendants are a surface mounted pendant. The pendants can be installed hard on the ceiling or with a shadowline.




Bespoke Shades



Electrical Configuration:


Below are the options currently available for complete light pendants. All options can be customised to specification subject to the shape of the pendant selected.






Diffusers:


Contessa diffusers are predominantly opal acrylic with a matt or gloss finish. Fabric or parchment diffusers can be manufactured as full base diffusers only.



Full base diffusers sit in the internal shade ring. These diffusers can be acrylic, fabric or parchment. Full diffusers are not available with tapered shades.



Recessed diffusers are used when an internal lining is applied to the shade. A centre finial holds the diffuser in place. The recessed height can be customised. Can only be used with acrylic diffusers.



Floating

Floating diffuser is a term used for a near full diffuser that is only slightly recessed and has a 1" gap from the sides of the shade. Can only be used with acrylic diffusers. A centre finial holds the diffuser in place.



Diffusers that sit on frame feet can be used when there is no light hub to attach the diffuser to or when using with a tapered conic shape shade.

Diffusers hooks that mount to the top frame are also an option where feet are not desired.

Shade Trims:



Bespoke Shades


Bespoke decorative lighting



Click <u>here</u> to go back to the Contents page






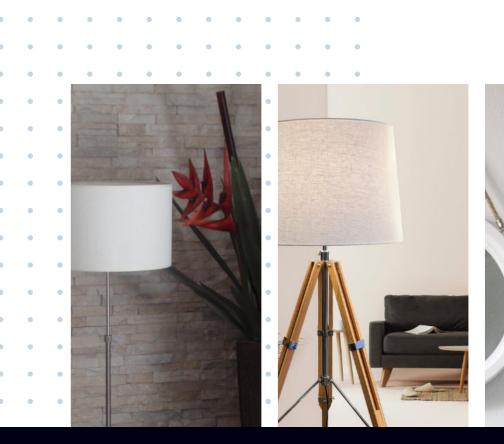

70+ Years industry experience

Contessa Lighting started in 1946. Throughout this time, decades of knowledge and experience has accumulated through the years or crafting and manufacturing unique













Physical Characteristics:

Electrical Configuration:

1500mm + neck suspension Complete height: 1900mm + neck suspension

Shade size:

Base height:

24x20x16" H Tapered shade (Australian made)

Available with or without the shade. Select the shade finish from the Contessa designer fabric sample folder.

Power: 1 x E27 lampholder Lampholder: 240V E27

Switch: In-line foot switch

Torre Tripod



٠	٠	٠	٠	٠	٠	٠	٠	٠	٠	٠	•
•	٠	٠	٠	•	٠	٠	٠	٠	٠	٠	•
•	٠	•	•	•	٠	٠	•	•	•	•	•
•	•	•	•	•	٠	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	
•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•
	•	•	•	•	•	•	•	•	•	•	•
•	•	•		•	•	•	•	•			
•	•			•	•	•	•	•			
			•	•	•	•				•	
•	•	•		•	•	•	•			•	
	•						•	•			

Finishes:




Natural & Polished Nickel 801PNN-FL



Ebony & Polished Nickel 801PNE-FL



Ebony & Brushed Brass 801BBE-FL

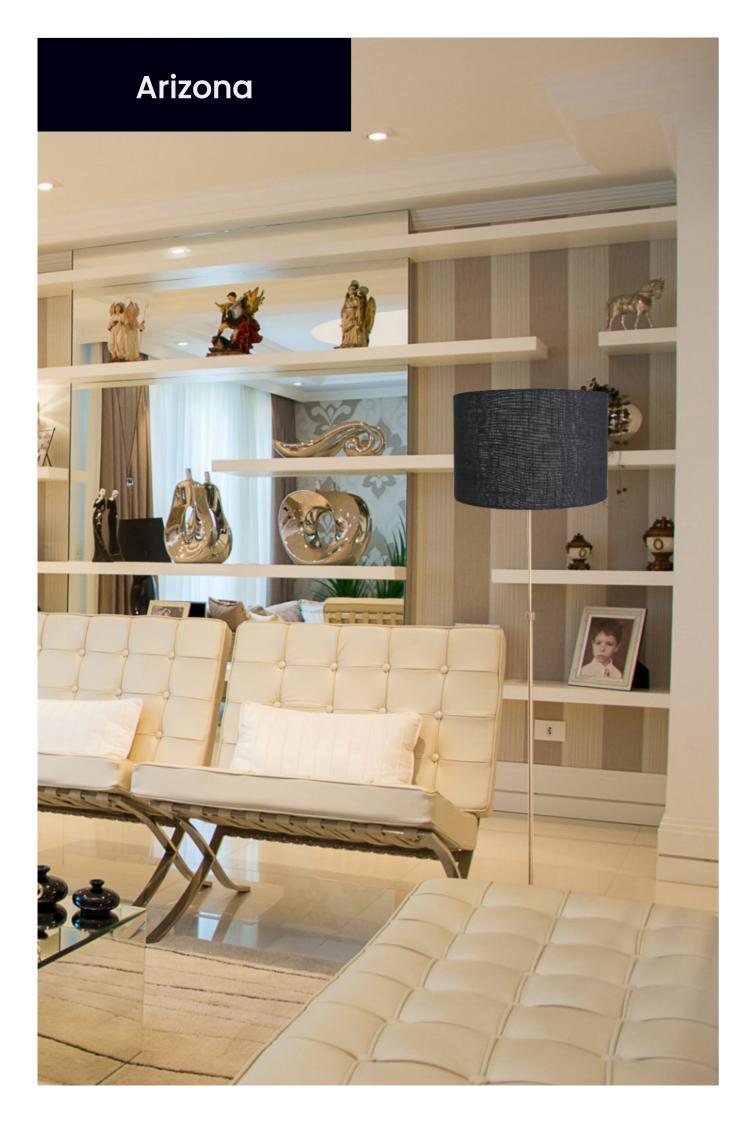





Physical Characteristics:

Base height:

• •

. . .

1310mm (adjustable) Complete height: 1645mm (adjustable)

Shade size: 16x16x12" H Drum shade

- Shade Finishes:
- Black Linen Natural Linen •
- Cream Linen
 White Linen
- Mist Linen

Electrical Configuration:

Power: 1 x B22 lampholder

In-line foot switch

Lampholder: 240V B22

Switch:

Arizona




Finishes:



Antique Brass 222AB-FL



Satin Nickel 222SN-FL

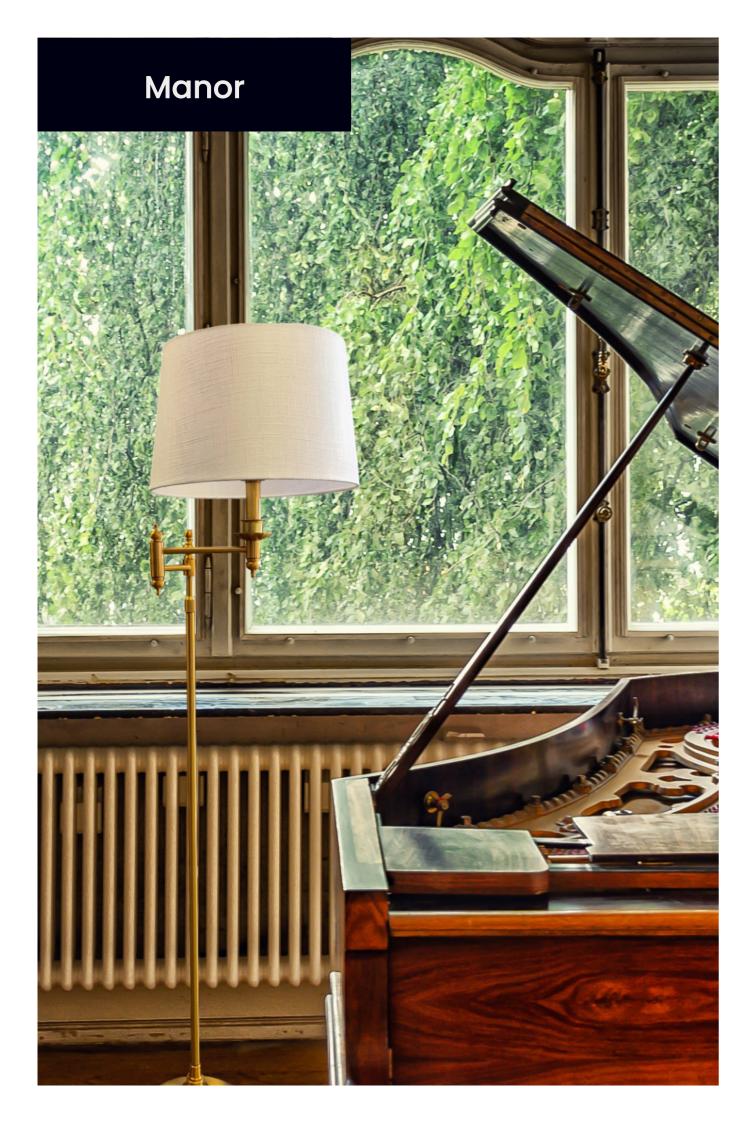





Physical Characteristics:

Base height: 1415mm Complete height:

1518mm Shade size:

14x12x9" H Rd tapered shade

Shade Finishes:

- Black Linen Natural Linen •
- Cream Linen
 White Linen
- Mist Linen

Electrical Configuration:

Power: 1 x E27 lampholder Lampholder:

Switch:

240V E27

In-line foot switch

Tel: 1300 887 9448 | Email: sales@contessalighting.com.au | Web: contessalighting.com.au



Finishes:



Old Brass 807BR-FL



Satin Nickel 807SN-FL



Fontana





Physical Characteristics:

Base height:

1370mm

Complete height: 1585mm

Shade size: 20x20x10" H Drum shade

Shade Finishes:

- Black Linen Natural Linen
- Cream Linen
 White Linen
- Mist Linen

Electrical Configuration:

Power: 1 x B22 lampholder

Lampholder: 240V B22

Switch: In-line foot switch

Tel: 1300 887 9448 | Email: sales@contessalighting.com.au | Web: contessalighting.com.au

Finishes:

Chrome FONF-FL-CH

COPYRIGHT © 2021

Physical Characteristics:

Base height: 1450mm Complete height:

1720mm

Shade size: 20x10x14" Rd tapered shade

Shade Finishes:

- . Snowflake
- Mist Linen

Electrical Configuration:

Power: Lampholder:

- Black

1 x B22 lampholder

- Off White

240V B22 Switch: In-line foot switch

Milan



French White 9001WH-FL



Lunar





. **Physical Characteristics:**

• • • • • • •

Base height: 330mm

. • • •

> Complete height: 490mm

Shade size: 10x5x8 SQW shade

Shade Finishes:

- Black
- Off White
- Snowflake

Electrical Configuration:

Power: 1 x B22 lampholder

Lampholder: 240V B22 Switch:

In-line switch

Product ID:

Code: 401-TL Material: K9 Crystal

Physical Characteristics:

Base height: 310mm Complete height: 470mm

Shade size:

10x5x8 RDW shade

Shade Finishes:

- Black
- Cream Linen
- Mist Linen
- Off White •
- Snowflake

Electrical Configuration:

Power: 1 x B22 lampholder Lampholder:

Switch: In-line switch

240V B22

Tel: 1300 887 9448 | Email: sales@contessalighting.com.au | Web: contessalighting.com.au

Metro



Product ID:

Code: 403-TL



Cascade





Physical Characteristics:

• • • • • •

Base height: 470mm

.

Complete height: 730mm

Shade size: 16x8x12 SQW shade

Shade Finishes:

- Black
- Off White

Electrical Configuration:

Power: 1 x B22 lampholder

240V B22 Switch:

Lampholder:

In-line switch

Product ID:

Code: 404-TL Material: K9 Crystal



Physical Characteristics:

Complete height: 555mm

Shade size:

Base height:

390mm

14" Straight Oval shade (Australian Made)

Available with or without the shade. Select the shade finish from the Contessa designer fabric sample folder.

Tel: 1300 887 9448 | Email: sales@contessalighting.com.au | Web: contessalighting.com.au

Power:

1 x B22 lampholder

Lampholder:

In-line switch

240V B22

Switch:

Orbit

Electrical Configuration:

Product ID:

Code: 405-TL







. **Physical Characteristics:**

Base height: 480mm

. . . .

> Complete height: 740mm

Shade size: 16x8x12 SQW shade

Shade Finishes:

- Black
- Off White

Electrical Configuration:

Power: 1 x B22 lampholder

Switch:

Lampholder:

240V B22

In-line switch

Product ID:

Code: 407-TL

Material: K9 Crystal (9kg)

Physical Characteristics:

Base height: 510mm

Complete height: 710mm

Shade size: 16x9x10" Rd tapered shade

Shade Finishes:

- Black
- Cream Linen
- Mist Linen
- Natural Linen •

Power: 1 x B22 lampholder Lampholder: 240V B22

Switch: In-line switch

- Snowflake •
- White Linen •

Tel: 1300 887 9448 | Email: sales@contessalighting.com.au | Web: contessalighting.com.au

Torch



Electrical Configuration:

Product ID:

Code: 408-TL



Flame





. **Physical Characteristics:**

Base height:

420mm

Complete height: 525mm

Shade size: 12x6x8" Rd tapered shade

Shade Finishes:

- Black
- . Cream Linen
- Mist Linen •
- Natural Linen • Snowflake •
- White Linen •



Electrical Configuration:

Power: 1 x B22 lampholder

Switch: In-line switch

Lampholder:

240V B22

Code: 409-TL Material: K9 Crystal

Product ID:

Physical Characteristics:

520mm Complete height: 720mm

Base height:

Shade size: 16x16x12" Drum shade

Shade Finishes:

- Black Linen
- Cream Linen
- •
- White Linen •

240V B22 Switch: In-line switch

Lampholder:

1 x B22 lampholder

Power:

- Mist Linen
- Natural Linen

Tel: 1300 887 9448 | Email: sales@contessalighting.com.au | Web: contessalighting.com.au



Chalice



Code: 410-TL



Chateau







Physical Characteristics:

Base height:

520mm

Complete height: 720mm

Shade size: 16x16x12" Drum shade

Shade Finishes:

- Black
- . Cream Linen
- Mist Linen •
- Natural Linen . •
- White Linen

Electrical Configuration:

Power:

240V B22 Switch:

In-line switch

Product ID:

Code: 411-TL Material: K9 Crystal

Physical Characteristics:

Base height: 630mm

Complete height: 800mm

Shade size: 18x11x11" RDW shade

Shade Finishes:

- Bamboo (pictured)
- Black •
- •
- White

Power:

1 x B22 lampholder Lampholder:

In-line switch

240V B22 Switch:

- Mist Linen
- Pebble
- •

1 x B22 lampholder Lampholder:

Hanson

Electrical Configuration:


Product ID:

Code: 107PO-TL


Material: Resin & porcelain

Fit for budget. Fit for purpose.

Click <u>here</u> to go back to the Contents page





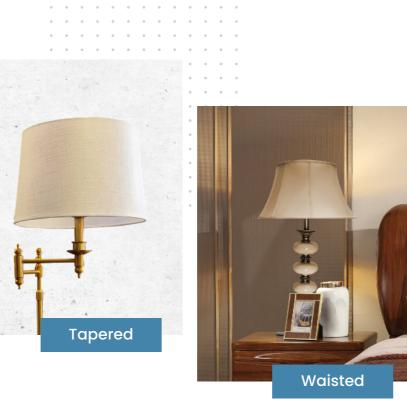

Tiny details make the difference!

Lamps and shades are an essential part of every residential interior. They create mood and atmosphere helping us relax and rejuvenate in our homes.

Contessa has been an essential part of many peoples homes for over 70 years.











Drum Shades



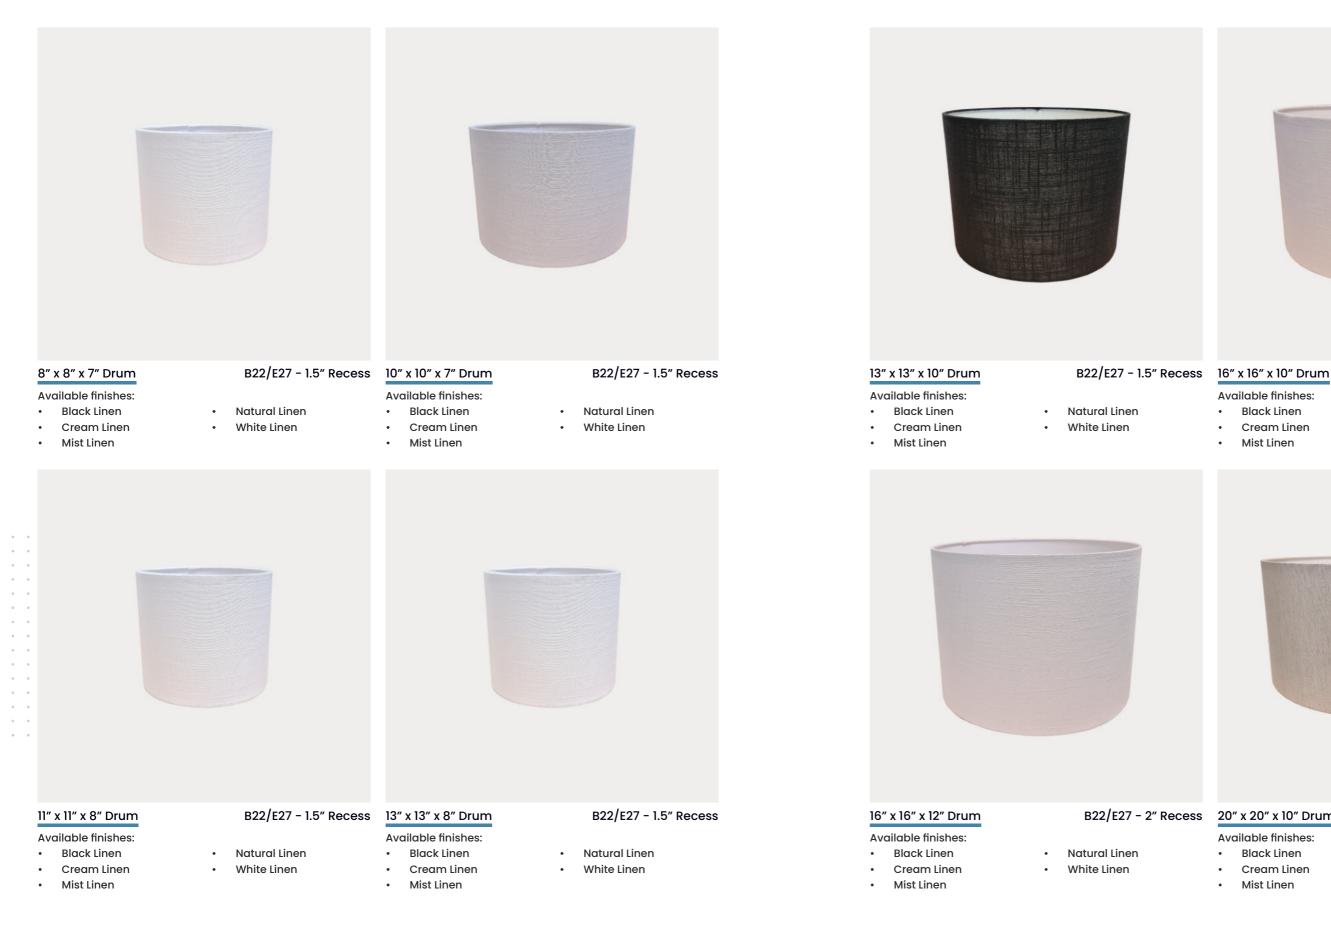

Drum Shades

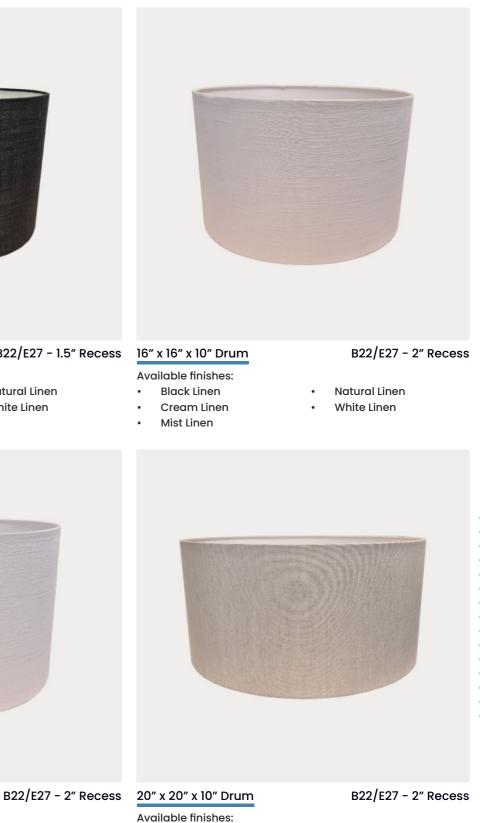

Natural Linen •

Black Linen

Mist Linen

Cream Linen

.

•

.

White Linen .




Tapered Shades





Tapered Shades

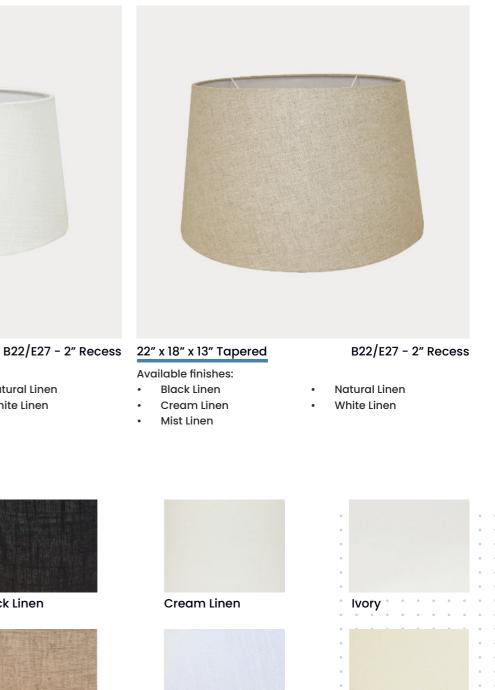

Off White



Oyster (Runout)

Snowflake



Empire Shades



8" x 5" x 6.5" Empire Available finishes: • Black • Wi • Ivory • Orange (B22)	B22/E27 - 1.5" Recess	Available finishes: • Black E27 • • Chocolate •	Hot Pink •		14" x 8" x 9" Empire Available finishes: • Black • • Cream Linen • • Hot Pink B22 •	Mist Linen Natural Linen Orange B22	B22/E27 - 2" Recest Off White Red B22 White Linen
12" x 4" x 8" Empire Available finishes: • Bark • Sn • Off White • Orange	B22 - 1.5" Recess nowflake	12" x 6" x 8" Empire Available finishes: • Black Linen • • Cream Linen • • Hot Pink B22 •	Mist Linen • Natural Linen •	27 - 1.5" Recess Red B22 Snowflake White Linen	18" x 9" x 13" Empire Available finishes: • Black • • Mist Linen • Off White	Snowflake	B22/E27 - 2″ Reces

Empire Shades



ess 20" x 10" x 14" Empire

Available finishes:

- Black Linen
- Mist Linen
- Off White


B22/E27 - 2" Recess

Snowflake



Waisted Shades



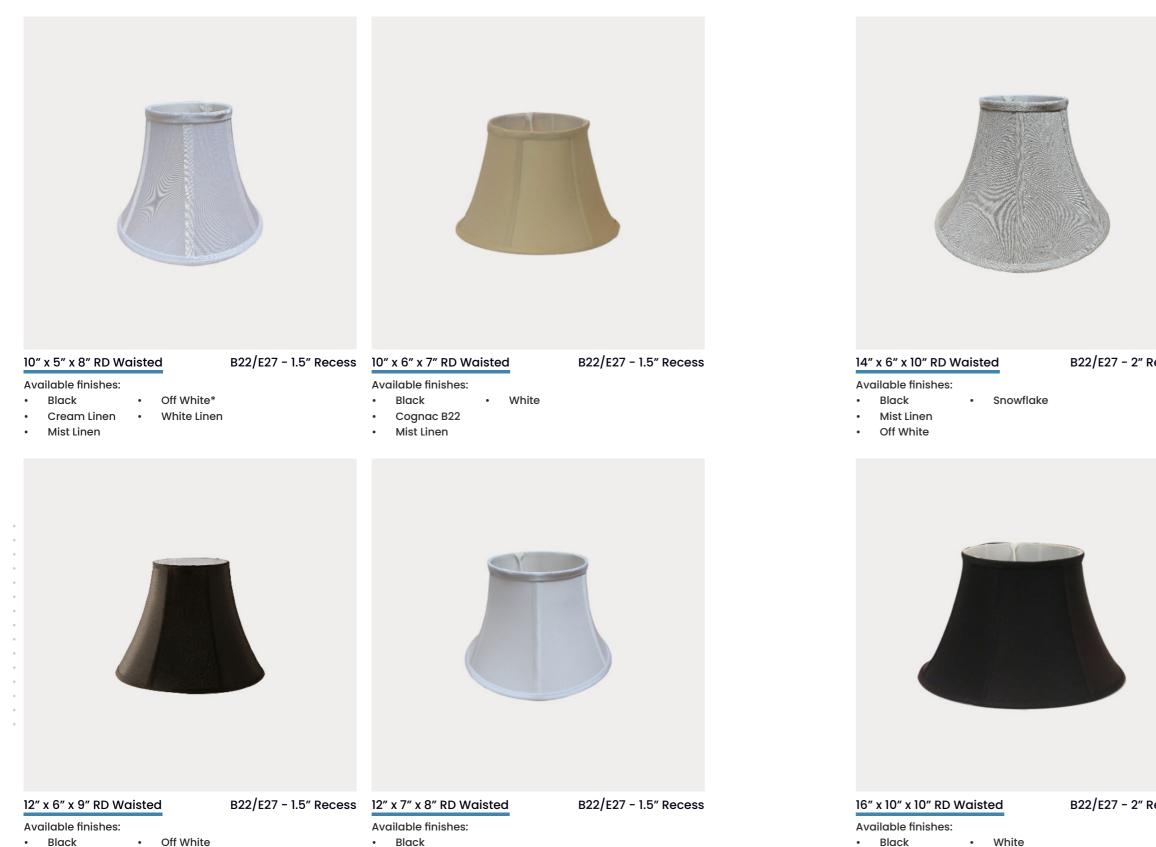

Mist Linen


- Cognac B22
- Mist Linen

Cream Linen
 Snowflake

Mist Linen

White Linen

Waisted Shades

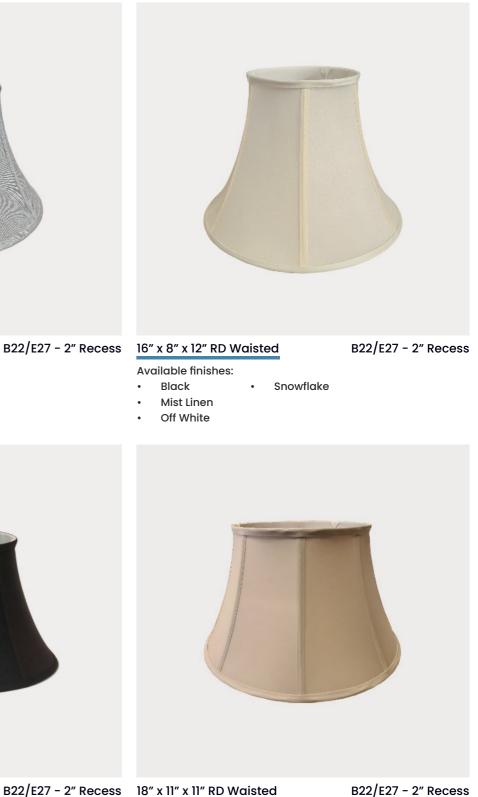

B22/E27 - 2" Recess 18" x 11" x 11" RD Waisted

Available finishes:

- Bamboo Pebble
- Black •


•

- Mist Linen
- White



Waisted Shades



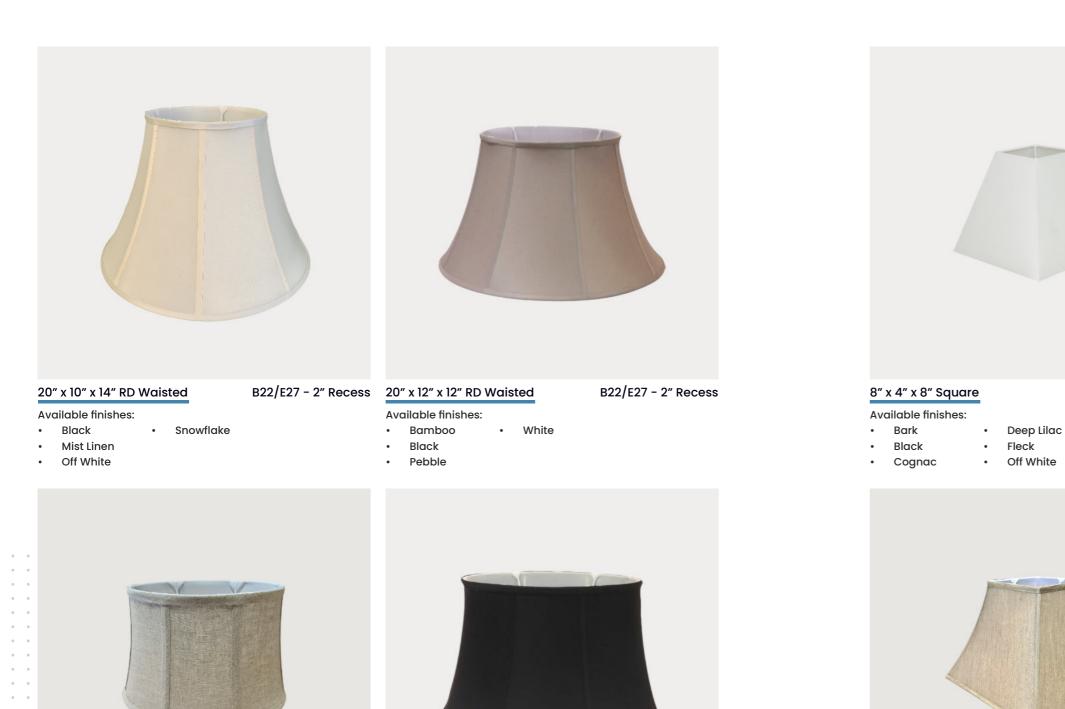

12" x 9" x 8" Oval Waisted

Available finishes:

- Black Linen Natural Linen
- Cream Linen
- Mist Linen

•

B22/E27 - 1.5" Recess

14" x 11" x 9" Oval Waisted

- Available finishes: Black Linen

- Mist Linen

B22/E27 - 2" Recess

- Cream Linen





12" x 6" x 9" SQ Waisted

B22/E27 -1.5" Recess

Snowflake

Available finishes:

- Beige B22 Oyster B22
- Snowflake Black
- Off White

Square Shades



Snowflake

B22/E27 - 1.5" Recess 10" x 5" x 8" SQ Waisted

Available finishes:


• Black

•

- Off White
- Oyster B22 •

B22/E27 - 1.5" Recess

0 0											
0 0	٠	٠	٠	٠	٠	٠	٠	٠	٠	٠	٠
0 0	•	٠	•	•	•	•	•	•	•	٠	٠
0 0	•	٠	•	•	•	•	•	•	•	٠	•
• •	•	•	•	•	•	•	•	•	•	•	•
0 0	•	٠	•	•	•	•	•	•	•	٠	٠
• •	•	٠	•	•	•	•	•	•	•	٠	٠
• •	•	•	•	•	•	•	•	•	•	•	•
· · · · · · · · · · · ·	•	٠	•	•	•	•	•	•	•	٠	٠
· · · · · · · · · ·	•	٠	•	•	•	•	•	•	•	٠	•
• • • • • • • • • •	•	٠	•	•	•	•	•	•	•	٠	•
	•	٠	•	•	٠	•	•	•	•	٠	٠
• • • • • • • • •	•	٠	•	•	•	•	•	•	•	٠	٠
	•	٠	•	•	•	•	•	•	•	٠	•
• • • • • • • • •	•	٠	•	•	٠	•	•	•	•	•	٠
	•	٠	•	•	•	•	•	•	•	٠	٠

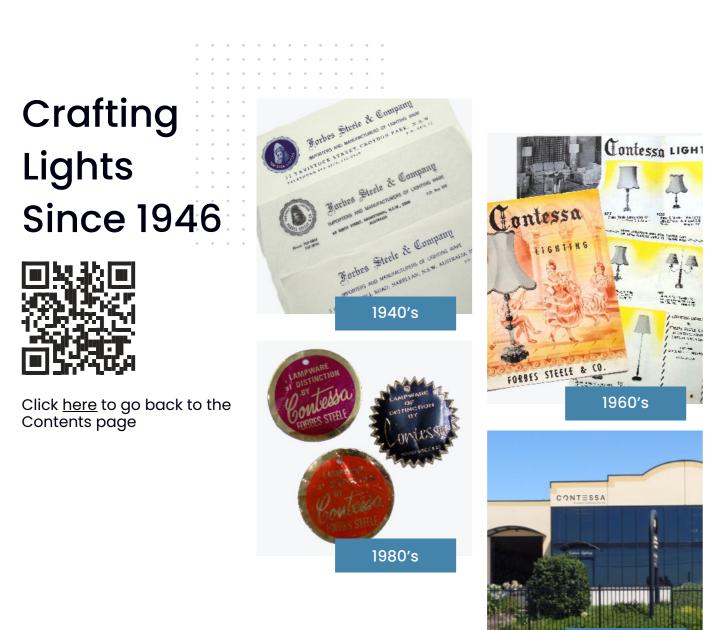



With over 70 years experience sourcing and manufacturing quailty lighting products, Contessa is well known in the industry for exceptional quailty and knowledge in the lighting space.



Accessories



Today



Accessories





Suspensions 1.0M or 3.0M

B22 (convert to E27 at additional cost) 100x25mm high canopy included Available finishes:

- <u>1.0 Meter</u> Black/Black Cloth 10MBLS-SP • • Satin Nickel/Clear* 10MCLS-SP
- White/White Cloth 10MWHS-SP
- 3.0 Meter 30MBLS-SP 30MCLS-SP 30MWHS-SP



CANOPY - 240MM - 3W

- Size: 240x50mm H (3 Wire)
- Available finishes:
- Texture Black*
- Texture White

CV LED DRIVERS - NON DIMMABLE

24V Tridonic Constant Voltage

Available Powers:

- . 18W
- 35W •
- 60W .
- 100W .

CV LED DRIVERS - TRIAC DIMMABLE

24V Constant Voltage

- Available Powers:
- 40W
- 60W
- 80W •

LED FLEX LIGHT ENGINE

- Available Powers:
- 11W 1800 Lms/m
- 16W 2500 lms/m
- (Cut increment: 100mm)

Size: 70x30mm H

•

Available finishes:

CANOPY - 70MM

Texture Black Texture White*





. .



CANOPY - 100MM

Size: 100x25mm H

Ave	ailable finishes:	Product ID:
•	Gloss Black	CANOPY100BL
•	Texture Black*	CANOPY100TB
•	Gloss White	CANOPY100WH
•	Texture White	CANOPY100TW
•	Satin Nickel	CANOPY100SN

CANOPY - 120MM

Av	ailable finishes:	Product ID:
•	Gloss Black	CANOPY120BL
•	Texture Black	CANOPY120TB
•	Gloss White	CANOPY120WH
•	Texture White	CANOPY120TW
•	Satin Nickel*	CANOPY120SN



Accessories

Product ID: CANOPY240BL CANOPY240WH

Product ID:

CVDT-18W CVDT-35W CVDT-60W CVDT-100W

Product ID:	•	•	•	•	•	•	•	•	•	•	•
CLD-CV-24-40	•	•	•	•	•	•	•	•	•	•	•
CLD-CV-24-60	•	•	•	•	•	•	•	•	•	•	•
CLD-CV-24-80	•	•	•	•	•	•	•	•	•	•	•
	•	•	•	•	•	•	•	•	•	•	٠
	•	•	•	•	•	•	•	•	•	•	•
	•	•	•	•	•	•	•	•	•	•	•
	•	•	•	•	•	•	•	•	•	•	•
	•	•	•	•	•	•	•	•	•	•	•

Tridonic Flex - Size: 8mm W x 5000mm L

	Product ID:
n	CLTF11W3K
	CLTF11W4K
n	CLTF16W3K
	CLTF16W4K

.

.

. . . .



Accessories





• • • • • • •

2C

Available finishes:

STAINLESS WIRE


Product ID: Black PVC round CFL2CB Black PVC flat CFL2CB-F Clear round CFL2CC White PVC round CFL2CW White PVC flat CFL2CW-F

1.5m, 2m or custom length

Available finishes:						
		Product ID:				
•	Black PVC round	CFL3CB				
•	Black cloth round	CFL3CB-FC				
•	Clear round	CFL3CC				
•	White PVC round	CFL3CW				

4C Also available

3C





- Size: 70x30mm H
- Available finishes:
- White





Chrome



LP-1715AL



Size: 17.5 x 15mm H	
Available Lengths:	Product ID:

• < 2.5m

Includes 2 x end caps and 2 x clips per meter




- E27 (Including shad Available finishes:
- Black*
- . White

AUSTRALIAN LAMPHOLDER

- B22 (3 Piece lampholder)
- Available finishes:
- Black •
- White* .





DTCCR-2 (sold in pairs)







WIRE RESTRAINT Size: 12x35mm H

Accessories

Opal acrylic 3mm - 6 , 8 , 10 , 11 , 12 , 13, 14 , 15 , 16 , 18, 20, 22, 24, 26, 28, 30, 32, 36, 40, 48, 60"

Available with or without centre hole.

Product ID: E27-B22RD

EUROPEAN LAMPHOLDER

•		•	•	•	•	•	•	•	•
٠	٠	•	•	•	•	•	•	•	•
•	٠	•	٠	•	•	•	•	•	•
•	٠	•	٠	•	•	•	•	•	•
•	٠	•	٠	•	•	•	•	•	٠
٠	٠	•	٠	٠	•	•	•	•	•
٠	٠	•	٠	•	•	•	•	•	٠
•	٠	•	٠	•	•	•	•	•	٠
٠	٠	•	٠	•	•	•	•	•	•
٠	٠	•	٠	•	•	•	•	•	•
•	•	٠	٠	•	٠	•	٠	•	•
				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	N N	No No<	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	0 0

Product ID:

LHB22BL LHB22WH



Tel: 1300 887 948 Email: sales@contessalighting.com.au Web: www.contessalighting.com.au