

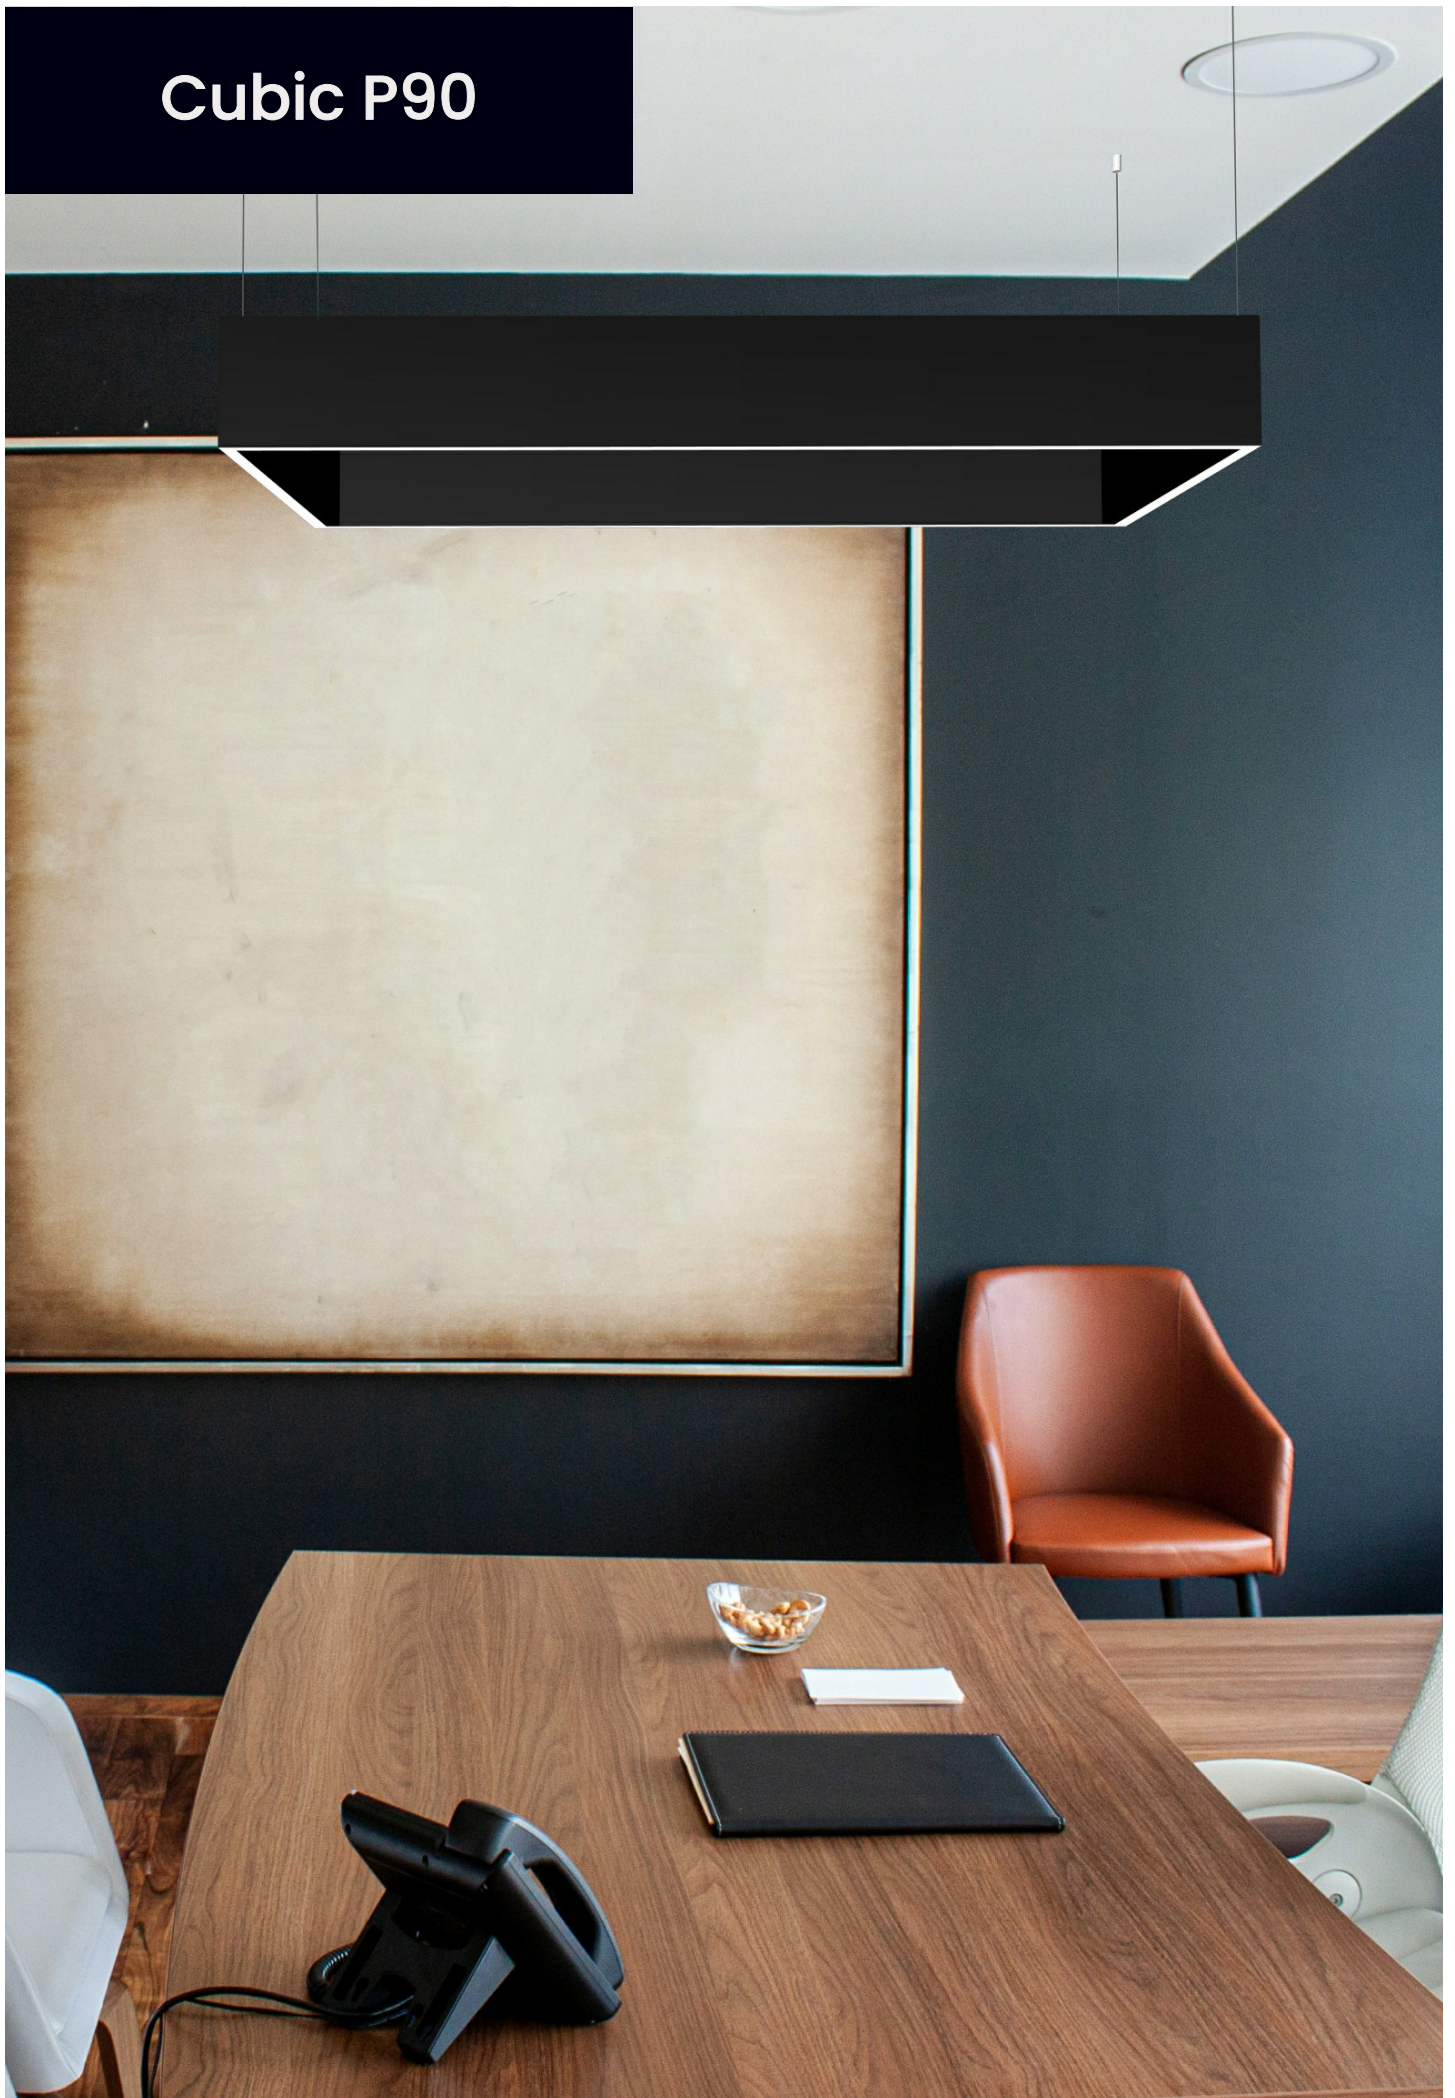


Cubic P90

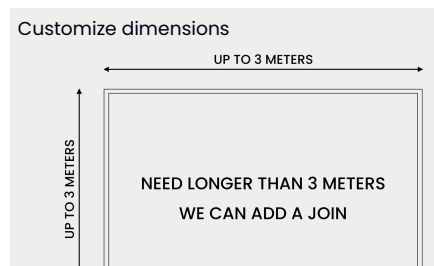

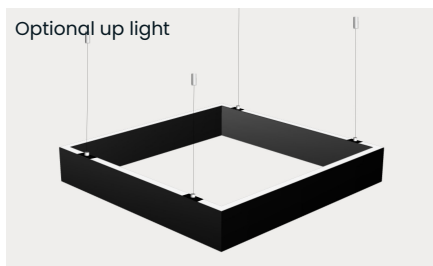

Physical Characteristics:

Profile:
20mm W x 90mm H

Dimensions:
Custom dimensions up to 3 by 3 meters in powdercoat or 2.9m in premium finishes.


Popular Sizes;
600x600mm SQ
800x800mm SQ
300x1500mm RE
400x1800mm RE
600x3000mm RE

Mounting: See below -

- Suspended - Wire suspensions (min 4)
- Surface Mounted

Wire positions can be customised.

Finishes:

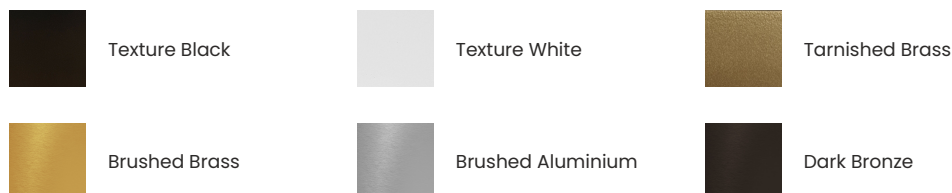

These finishes wont work with your colour scheme? Specify your own.

Electrical Configuration:

Power Options:

- 11 Watts / meter (Standard)
- 16 Watts / meter (High output)
- 11 Watts / meter (Up)

IP Rating:
IP20 - For indoor use only. Should not be used in wet areas.

Control gear:
24V Constant voltage LED Driver

Dimming options:

- Phase cut included
- SwitchDIM optional
- DALI optional

Photometrics:

Lumen packages:

- 11W = 1800 Lm/m (Down)
- 16W = 2500 Lm/m (Down)
- 11W = 1200 Lm/m (Up)

LED type:
Tridonic LED flex light engine

CRI:
CRI 80 (CRI 90+ available)

CCT:
3000K or 4000K

Distribution:
100° direct & in-direct. Diffused

Mounting options:

