

Quad-Q





Product Features:

- Custom Made to order
- High quality componentry
- Available in set sizes or customise
- Bespoke square or rectangular shapes
- Black, White, Brass or custom finishes
- Up to 100 lm/W efficacy
- Suspended, surface mounted or recessed*
- Use Junctions to create larger shapes
- Up to 6 profile options
- 2700K to 6000K
- Up to 5 year warranty
- Shop drawings available







DALI
OPTIONAL

IP20
RATED

5 YR
WARRANTY

Physical Characteristics:

Profile Options:




Standard Dimensions:


600MM		
Profile Size	Power	Lumens
LP4060	15W	1500 lms
LP6060	40W	4000 lms
LP4080	15W	1500 lms
LP6080	40W	4000 lms
LP60100	40W	4000 lms
LP80100		

750MM		
Profile Size	Power	Lumens
LP4060	24W	2400 lms
LP6060	55W	5500 lms
LP4080	24W	2400 lms
LP6080	55W	5500 lms
LP60100	55W	5500 lms
LP80100		

900MM		
Profile Size	Power	Lumens
LP4060	27W	2700 lms
LP6060	60W	6000 lms
LP4080	27W	2700 lms
LP6080	60W	6000 lms
LP60100	60W	6000 lms
LP80100		


Standard Dimensions:

1000MM		
		
Profile Size	Power	Lumens
LP4060	35W	3500 lms
LP6060	70W	7000 lms
LP4080	35W	3500 lms
LP6080	70W	7000 lms
LP60100	70W	7000 lms
LP80100		

1200MM		
		
Profile Size	Power	Lumens
LP4060	40W	4000 lms
LP6060	80W	8000 lms
LP4080	40W	4000 lms
LP6080	80W	8000 lms
LP60100	80W	8000 lms
LP80100		

Custom Dimensions:

The Quad-Q series pendant dimensions can be customised. For dimensions 1500mm and greater the fitting will be manufactured in parts like the below diagram. Contessa will work with you to manufacture the Quad-Q to the nearest size increment that you specify.

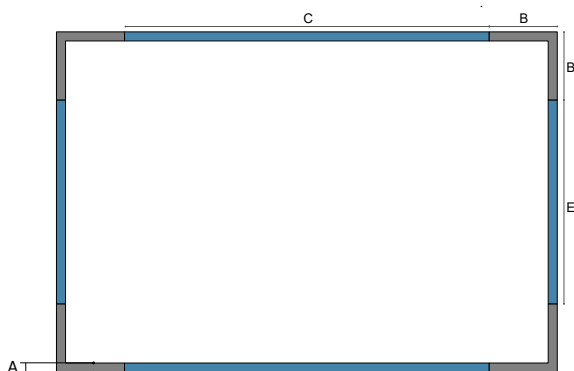

A/mm	B/mm	C&E/mm
40	300	Custom
60		
80		
100		

Electrical Configuration:

Dimming	CCT	CRI	INPUT
On / Off	2700K	>80 (Standard)	100-277V
DALI	3000K	>90	
SwitchDIM	4000K	>95	
1-10V	6000K		
	RGB		
	RGBW		
	Tunable White		

Finishes:

Texture Black

Texture White


Tarnished Brass

Custom Finish

Specify

Mounting Options:

Suspended (Standard 2.0M)

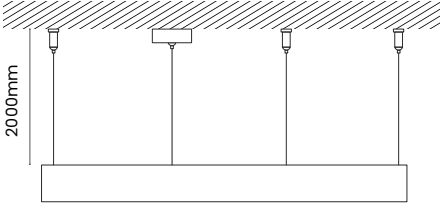

Surface Mounted



Recessed



**Note* - Larger recessed mounted Quad-Q fittings may require additional supports in the ceiling space*

Code Generator:

Product	Profile	Size	Finish	Mounting	CCT	Driver
QUAD-Q	40x60	600	Black BL	Pendant PEN	2700K 2.7	On/Off STA
	60x60	750	White WH	Surface SUR	3000K 3	SwitchD SwD
	40x80	900	T/Brass TB	Recessed REC	4000K 4	DALI DALI
	60x80	1000	Custom CM		5000K 5	1-10V 110V
	60x100	1200			RGB R1	
	80x100	Custom Size C x E Lengths			RGBW R2	
					Tunable TUN	

When specifying custom details e.g. size and finish, please include the details in the comments section of the project quote request function on our website or include in the lighting schedule.