

Quad-QR





Product Features:

- Custom Made to order
- High quality componentry
- Available in set sizes or customise
- Bespoke square or rectangular shapes
- Black, White, Brass or custom finishes
- Up to 100 lm/W efficacy
- Suspended, surface mounted or recessed
- Use Junctions to create larger shapes
- Up to 6 profile options
- 2700K to 6000K
- Up to 5 year warranty
- Shop drawings available






DALI
OPTIONAL

IP20
RATED

5 YR
WARRANTY

Physical Characteristics:

Profile Options:




Standard Dimensions:


900MM		
Profile Size	Power	Lumens
LP4060	20W	2000 lms
LP6060	50W	5000 lms
LP4080	20W	2000 lms
LP6080	50W	5000 lms
LP60100	50W	5000 lms
LP80100		

1000MM		
Profile Size	Power	Lumens
LP4060	25W	2500 lms
LP6060	60W	6000 lms
LP4080	25W	2500 lms
LP6080	60W	6000 lms
LP60100	60W	6000 lms
LP80100		

1100MM		
Profile Size	Power	Lumens
LP4060	35W	3500 lms
LP6060		
LP4080	35W	3500 lms
LP6080		
LP60100		
LP60100		


Standard Dimensions:

1200MM		
		
Profile Size	Power	Lumens
LP4060	40W	4000 lms
LP6060	70W	7000 lms
LP4080	40W	4000 lms
LP6080	70W	7000 lms
LP60100	70W	7000 lms
LP80100		

660MM D CORNER SECTIONS		
		
Profile Size	Power	Lumens
LP4060	8W	800 lms
LP6060	18W	1800 lms
LP4080	8W	800 lms
LP6080	18W	1800 lms
LP60100	18W	1800 lms
LP80100	22W	2200 lms

Custom Dimensions:

The Quad-QR series pendant dimensions can be customised. For dimensions 1500mm and greater the fitting will be manufactured in parts like the below diagram. Contessa will work with you to manufacture the Quad-QR to the nearest size increment that you specify.

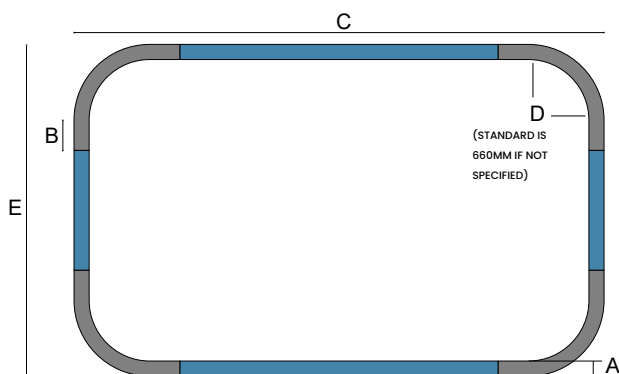

A/mm	B/mm	C&E/mm	D/mm CORNER DIAMETER
			450
			660
			900
			1060
			1200
40			1560
60	200	Custom	1860
80			2060
100			2460
			3060
			4060
			5060
			6060

Electrical Configuration:

Dimming	CCT	CRI	INPUT
On / Off	2700K	>80 (Standard)	100-277V
DALI	3000K	>90	
SwitchDIM	4000K	>95	
1-10V	6000K		
	RGB		
	RGBW		
	Tunable White		

Finishes:

Texture Black

Texture White

Tarnished Brass

Custom FinishSpecify

Mounting Options:

Suspended (Standard 2.0M)

2000mm

Surface Mounted

Recessed

Note - Larger recessed mounted Quad-QR fittings may require additional supports in the ceiling space

Code Generator:

Product	Profile	Size	Finish	Mounting	CCT	Driver
QUAD-QR	40x60	900	BlackBL	PendantPEN	2700K2.7	On/OffSTA
	60x60	1000	WhiteWH	SurfaceSUR	3000K3	SwitchDSwD
	40x80	1100	T/BrassTB	RecessedREC	4000K4	DALIDALI
	60x80	1200	CustomCM		5000K5	1-10V110V
	60x100	Custom Size C x E Lengths			RGBR1	
	80x100				RGBWR2	
					TunableTUN	

When specifying custom details e.g. size, finish and corner diameter of the Quad-QR, please include the details in the comments section of the project quote request function on our website or include in the lighting schedule.