

Geo-Q




Cold Drinks	
SOFT DRINKS	
COKE, COKE ZERO, SPRITE, SPRITE ZERO	15
SLIMLINE CREAM SODA	
SLIMLINE	15
APPLE, GRAPE	
ICED TEAS	15
LEMON LIME - GINGER, PEACH	
WATER	7
STILL SPARKLING	
JUICES	15
APPLE, MANGO - ORANGE	22
MILKSHAKES	28
FRUITOS: COFFEE, CHOCOLATE, STRAWBERRY	24
SMOOTHIES	28
APPLE - PINKI, BEETROOT - COCONUT,	

Hot Drinks	
ASSORTED TEAS	15
HOT AMERICANO	20
HOT CAPPUCCINO	23
HOT CHOCOLATE	23
CHAI LATTE	25
Eats	
SEE SNACKS AND PASTRIES AVAILABLE	
WIFI PASSWORD: ON SLIP	

Coffees		
	SHORT	TALL
AMERICANO	17	20
CAPPUCCINO	16	18
ESPRESSO	19	23
CAFE LATTE		22
FLAT WHITE	24	
CORTADO	23	
MACCHIATO	17	
MOCHA		25
ICED COFFEE	20	26
ICED MOCHA	22	28
(DECAF AVAILABLE)		

COLLECT
HERE

ORDER
HERE



Product Features:

- Custom Made to order
- High quality components
- Available in set sizes or customise
- Black, White, Brass or custom finishes
- Up to 100 lm/W efficacy
- Suspended, surface mounted or recessed
- Use Junctions to create larger shapes
- Up to 6 profile options
- 2700K to 6000K
- Up to 5 year warranty
- Shop drawings available







DALI
OPTIONAL

IP20
RATED

5 YR
WARRANTY

Physical Characteristics:

Profile Options:




Standard Dimensions:


600MM		
Profile Size	Power	Lumens
LP4060	13W	1300 lms
LP6060	25W	2500 lms
LP4080	13W	1300 lms
LP6080	25W	2500 lms
LP50100	13W	1300 lms
LP60100	25W	2500 lms

750MM		
Profile Size	Power	Lumens
LP4060		
LP6060	30W	3000 lms
LP4080		
LP6080	30W	3000 lms
LP50100		
LP60100	30W	3000 lms

900MM		
Profile Size	Power	Lumens
LP4060	17W	1700 lms
LP6060	30W	3000 lms
LP4080	17W	1700 lms
LP6080	30W	3000 lms
LP50100	17W	1700 lms
LP60100	30W	3000 lms


Standard Dimensions:

1050MM		
		
Profile Size	Power	Lumens
LP4060		
LP6060	45W	4500 lms
LP4080		
LP6080	45W	4500 lms
LP50100		
LP60100	45W	4500 lms

1200MM		
		
Profile Size	Power	Lumens
LP4060	20W	2000 lms
LP6060	60W	6000 lms
LP4080	20W	2000 lms
LP6080	60W	6000 lms
LP50100	20W	2000 lms
LP60100	60W	6000 lms

Custom Dimensions:

The Geo-Q series pendant dimensions can be customised. For dimensions 1500mm and greater the fitting will be manufactured in parts like the below diagram. Contessa will work with you to manufacture the Geo-Q to the nearest size increment that you specify.

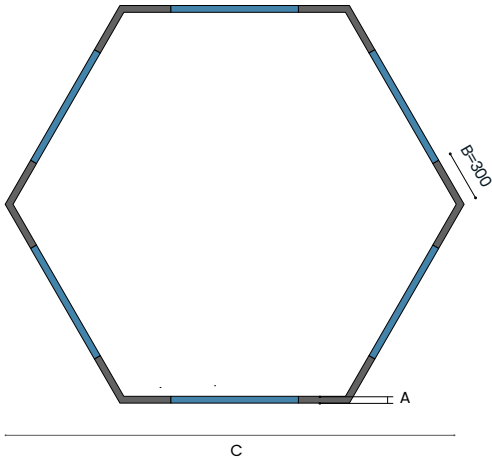

A/mm	B/mm	C/mm
40 60 80	300	900
		1000
		1100
		1200
		1300
		1400
		1500
		1600
		1700
		1800
		1900
		2000
		2200
		2400

Junctions:



GQ-1



GQ-2



GQ-3



GQ-4



GQ-5



GQ-6



GQ-7



GQ-8



GQ-9


Electrical Configuration:

Dimming	CCT	CRI	INPUT
On / Off	2700K	>80 (Standard)	100-277V
DALI	3000K	>90	
SwitchDIM	4000K	>95	
1-10V	6000K		
	RGB		
	RGBW		
	Tunable White		

Finishes:



Mounting Options:

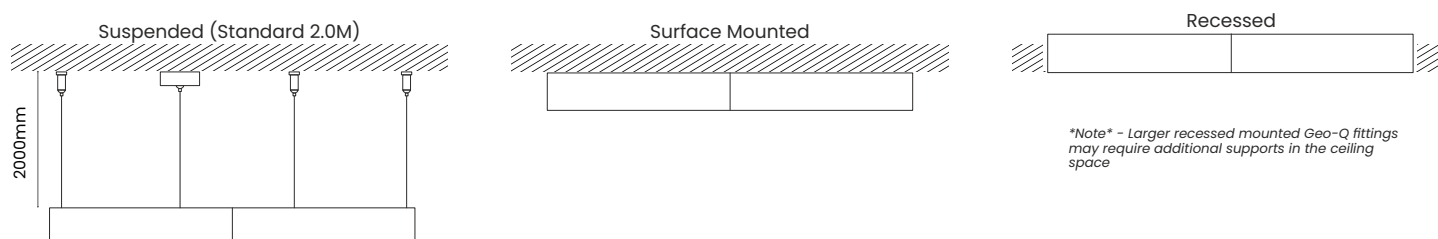

Code Generator:

Product	Profile	Size	Finish	Mounting	CCT	Driver
GEO-Q	40x60	600	Black BL	Pendant PEN	2700K 2.7	On/Off STA
	60x60	750	White WH	Surface SUR	3000K 3	SwitchD SwD
	40x80	900	T/Brass TB	Recessed REC	4000K 4	DALI DALI
	60x80	1050	Custom CM		5000K 5	1-10V 110V
	60x100	1200			RGB R1	
	80x100	Custom			RGBW R2	
					Tunable TUN	

When specifying custom details e.g. size & finish, please include the details in the comments section of the online project quote request function on our website or include in the lighting schedule.

Shape Ideas:

