

Quad-ZR





Product Features:

- Custom Made to order
- High quality componentry
- Available in 6 set sizes
- Black, White, Brass or custom finishes
- Up to 100 lm/W efficacy
- Suspended, surface mounted or recessed
- 2 Height options
- 2700K to 6000K
- Up to 5 year warranty
- Shop drawings available

DALI
OPTIONAL

IP20
RATED

5 YR
WARRANTY

Physical Characteristics:

Available Sizes:

600MM		
Profile Height	Power	Lumens
80mm	60W	6000 lms
100mm		

750MM		
Profile Height	Power	Lumens
80mm	100W	10000 lms
100mm		

900MM		
Profile Height	Power	Lumens
80mm	130W	13000 lms
100mm		

1000MM		
Profile Height	Power	Lumens
80mm	180W	18000 lms
100mm		


1100MM		
Profile Height	Power	Lumens
80mm	210W	21000 lms
100mm		

1200MM		
Profile Height	Power	Lumens
80mm	240W	24000 lms
100mm		



Electrical Configuration:

Dimming	CCT	CRI	INPUT
On / Off	2700K	>80 (Standard)	100-277V
DALI	3000K	>90	
SwitchDIM	4000K	>95	
1-10V	6000K		
	RGB		
	RGBW		
	Tunable White		

Finishes:



Mounting Options:

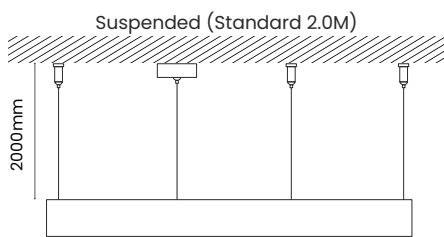

**Note* - Larger recessed mounted Quad-Z fittings may require additional supports in the ceiling space*

Code Generator:

Product	Height/mm	Size/mm	Finish	Mounting	CCT	Driver
QUAD-ZR	80	600	Black BL	Pendant PEN	2700K 2.7	On/Off STA
	100	750	White WH	Surface SUR	3000K 3	SwitchD SwD
		900	T/Brass TB	Recessed REC	4000K 4	DALI DALI
		1000	Custom CM		5000K 5	1-10V 110V
		1100			RGB R1	
		1200			RGBW R2	
					Tunable TUN	

— — — — — — — —

When specifying custom details e.g. finish, please include the details in the comments section of the project quote request function on our website or include in the lighting schedule.