

Nimbus Multi





SAMSUNG
LIGHT ENGINE

DALI
OPTIONAL

IP20
RATED

DIRECT
LIGHT

PHYSICAL CHARACTERISTICS:

DIAMETERS


- 450mm
- 600mm
- 800mm
- 1000mm
- 1200mm
- 1500mm
- Custom Tier

Standard Multi-Tier is 450-1200mm however you can select any diameters to create a Multi-Tier Pendant. Insert desired sequence above.

For example 4 Tier, 3 Tier, 2 Tier or more than 5 tiers.

FINISH

- Texture Black
- Texture White
- Gold Pearl
- Dark Bronze
- Texture Silver




- Custom Finish *Please specify,*

Custom finishes you can specify are powder coats only e.g Dulux Powders range.

PROFILE SIZE

20mm W x 25mm H - Aluminium



ELECTRICAL CONFIGURATION:

SAMSUNG BOARD LIGHT ENGINE *(Constant Current)*

450mm = 24 Watts - 1750 Lumens
 600mm = 36 Watts - 2660 Lumens
 800mm = 42 Watts - 2984 Lumens
 1000mm = 60 Watts - 3300 Lumens
 1200mm = 65 Watts - 4000 Lumens
 1500mm = 72 Watts - 5100 Lumens

DISTRIBUTION

Direct light only. 120° Diffused
(Direct & In-direct light output available)

CCT

- 3000K Warm White
- 4000K Cool White
- 5000K Day Light *(Not stock item)*

CRI

CRI >80 (standard)

IP RATING

IP20 (For indoor use only. Should not be used in wet areas)

WEIGHT

Full 5 Tier approx. 16kg

DIMMING

- Non Dim - On/Off
- Phase Cut *(Only up to 1200mm diameter)*
- SwitchDIM
- DALI
- 1-10 Volt

CONTROL GEAR


Contessa constant current P/C dimmable driver
 Meanwell constant current 1-10V dim driver
 Tridonic One4All DALI constant current driver

WARRANTY


- 3 Years (standard)
- 5 Years (optional - fees apply)

MOUNTING OPTIONS:

Option 1 - Suspended with Centre Canopy
(Remotely stored drivers - up to 3 drivers)

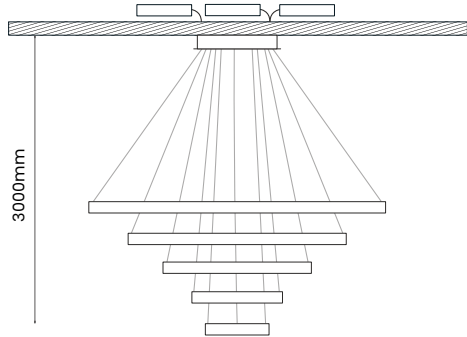

Option 2 - Suspended Direct to Ceiling
(Remotely stored drivers - up to 3 drivers)

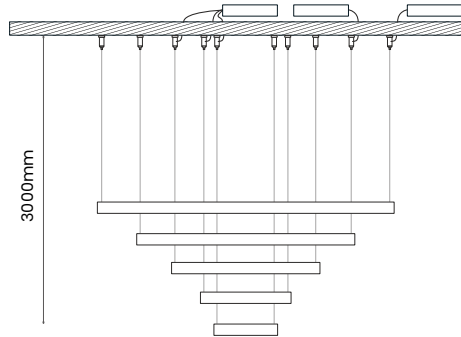

RING PLACEMENT

Each ring is suspended on 3 adjustable wires and can be adjusted to any position vertically and angled horizontally.

One suspension cable per ring is a 2in1 low voltage cable that operates as the power cable.



SUSPENSION LENGTH

Suspension lengths can be specified longer however the standard is;

Wires = 3000mm long (adjustable)

Custom length *Please specify,*

CANOPY DETAILS: *(For option 1)*



Code Generator:

Product	Length	Finish	Distribution	CCT	Mounting	Driver
NIMBUS MULTI	450MM - 45	Texture Black - BL	Direct - DWN <i>Stock</i>	3000K - 3K <i>Stock</i>	Option 1 - M1	On/Off - STA
	600MM - 60	Texture White - WH	Direct & Indirect - UPD <i>Indent</i>	4000K - 4K <i>Stock</i>	Option 2 - M2	Phase Cut - PC <i>ONLY UP TO 1200mm</i>
	800MM - 80	Gold Pearl - GP		5000K - 5K <i>Indent</i>		DALI - DA
	1000MM - 100	Dark Bronze - DB				SwitchDIM - SwD
	1200MM - 120	Texture Silver - TS				1-10 Volt - 1.10V
	1500MM - 150	CUSTOM - C/F				
SN/MULTI						

E.g 45/60/80/100/120 or custom sequence

When specifying custom details e.g. finish, please include the details in the comments section of the online project quote request function on our website or include in the lighting schedule.