


# Ring 60 Biophilic





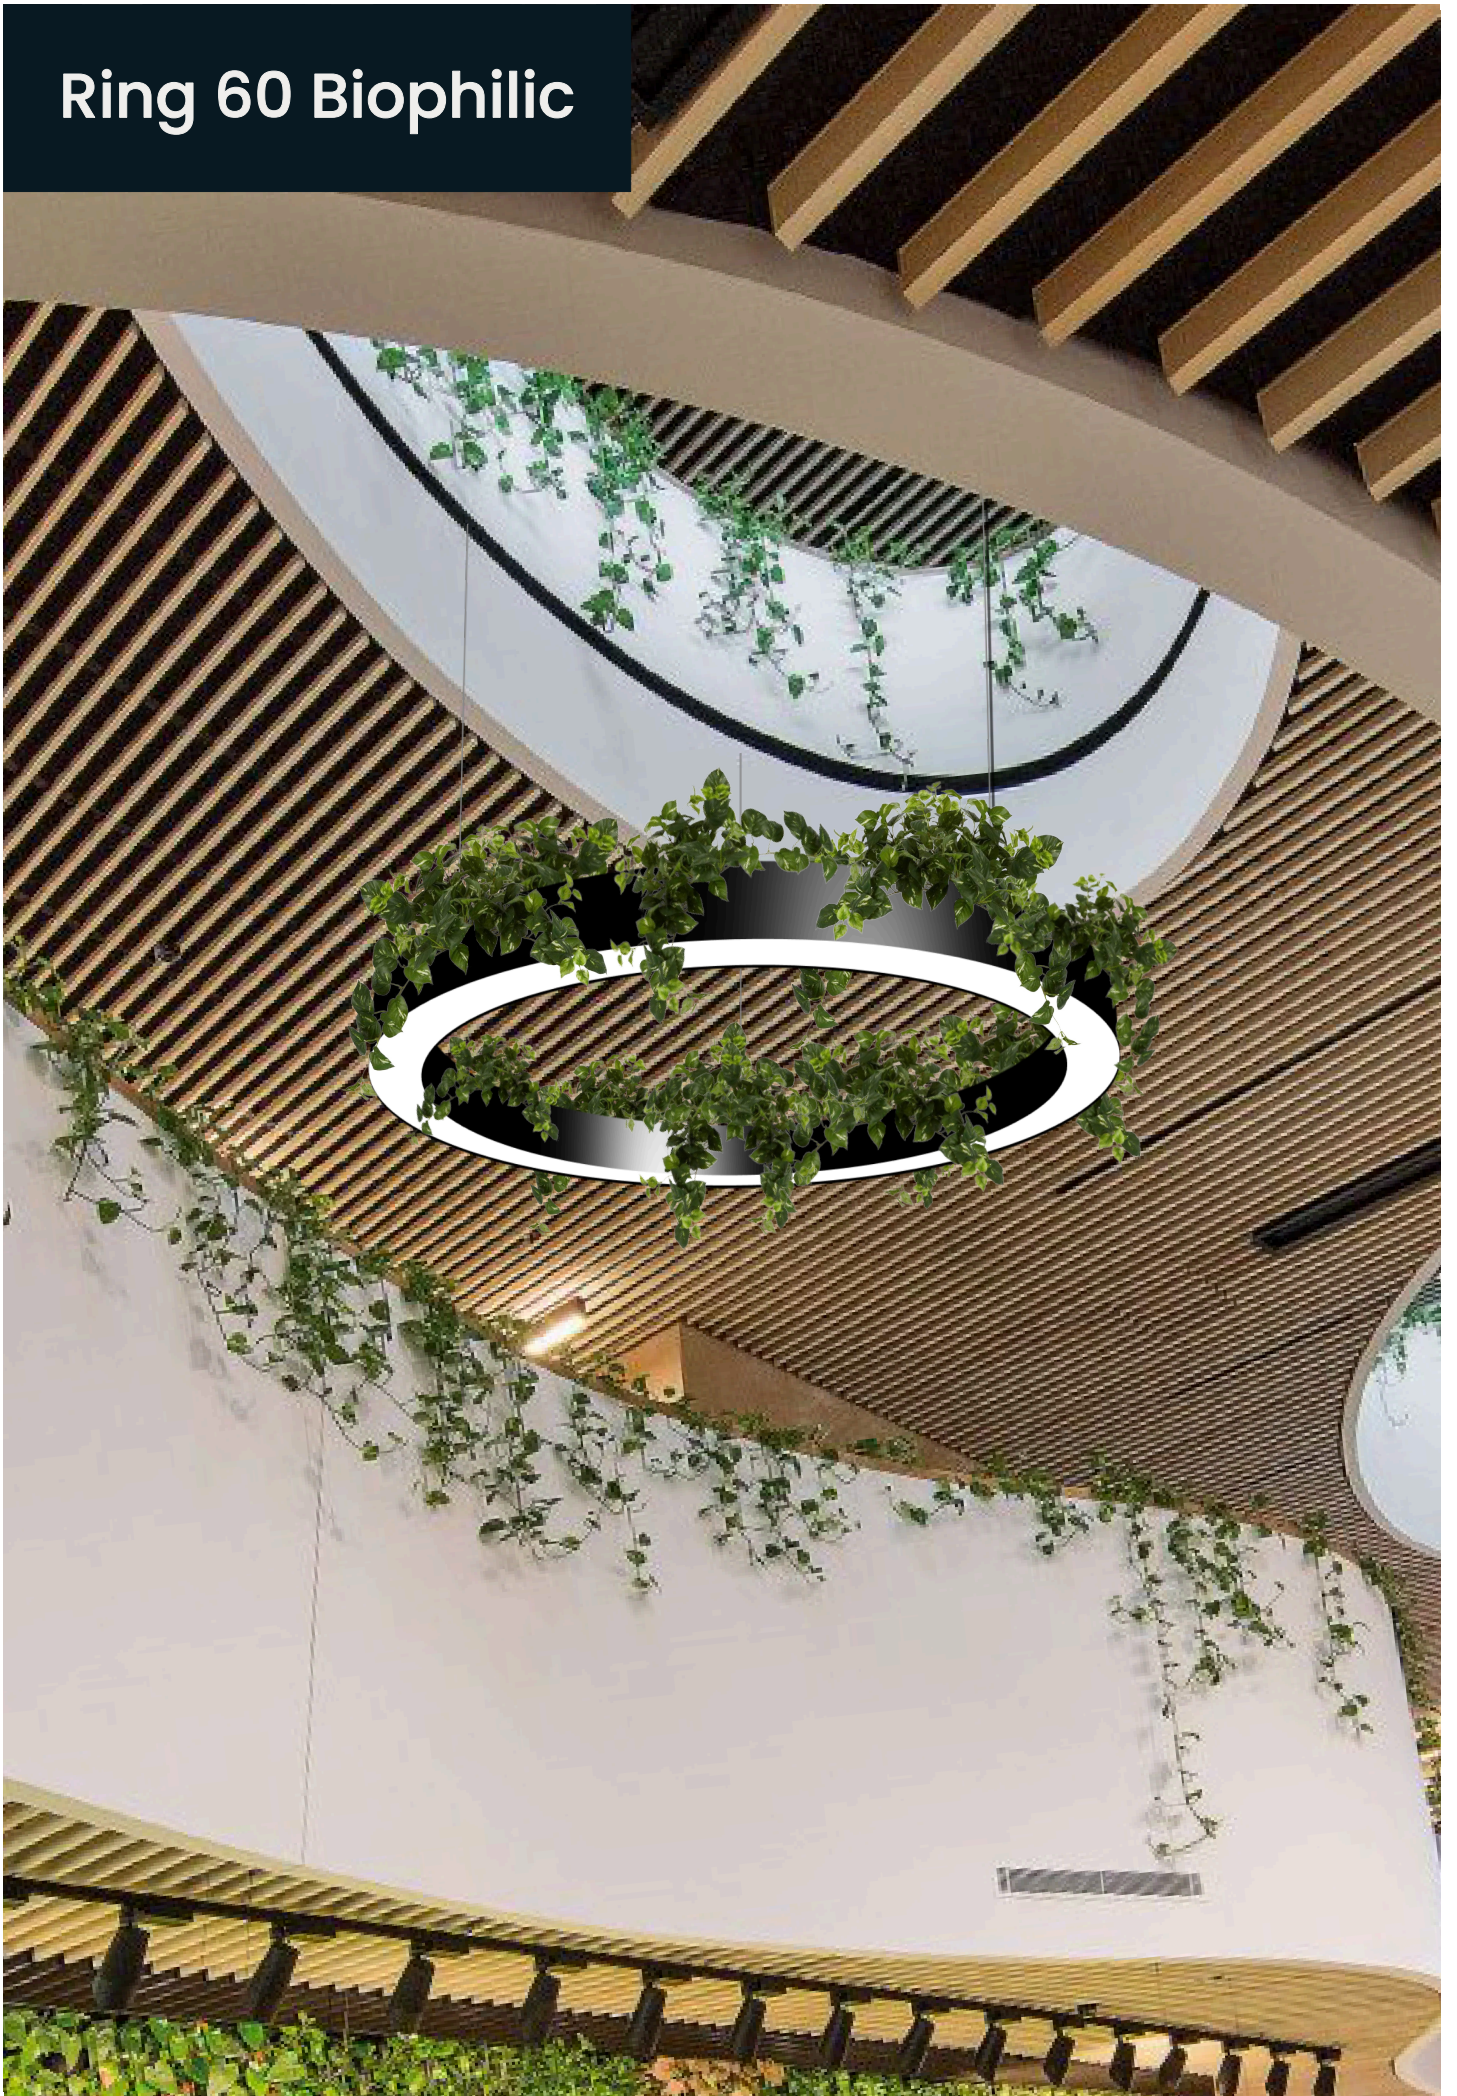

## PHYSICAL CHARACTERISTICS:

### DIAMETER

- 450mm
- 600mm
- 900mm
- 1000mm
- 1200mm
- 1500mm
- 1800mm
- 2000mm
- 2400mm
- 3000mm
- 4000mm
- 5000mm
- 6000mm
- 7000mm
- Custom Diameter

Custom diameters can be manufactured. Additional fees apply.


### PROFILE SIZE

- W40 x H60mm
- W40 x H80mm
- W40 x H100mm
- W40 x H150mm *Recommended*
- W60 x H60mm
- W60 x H80mm
- W60 x H100mm
- W60 x H150mm *Recommended*
- W80 x H60mm
- W80 x H80mm
- W80 x H100mm
- W80 x H150mm *Recommended*

Custom widths up to 200mm. Profile heights 60, 80, 100 & 150mm.

### FRAME FINISHES:

- Texture Black
- Texture White
- Gold Pearl
- Copper Bronze
- Dark Bronze
- Texture Silver

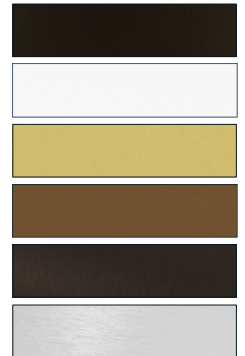

- Custom Powder Coat Finish: *Please specify,*

## GREENERY OPTIONS: (or click [here](#) to view complete range for both types)

- Mini-leaf Hanging Vine
- Boxwood Hanging Vine
- Ivy Bush Vine
- Pothos Hanging Bush
- Wandering Jew *Purple & Green*



## ELECTRICAL CONFIGURATION:

### PCB LIGHT ENGINE (Constant Current)

- 10W/m = 1000 lumens /m
- 20W/m = 2000 lumens /m
- 30W/m = 3000 lumens /m
- 40W/m = 4000 lumens /m

### DISTRIBUTION

- Direct light. 100° Diffused.
- Direct & In-direct light optional. Diffused.

Both direct & in-direct light output can be specified from the PCB LIGHT ENGINE list.

### CCT

- 3000K Warm White
- 4000K Cool White
- 5000K Day Light
- RGB (Different wattage applies)
- RGBW (Different wattage applies)

### CRI

- CRI >80+ (Standard)
- CRI >90+ (Fee applies)

### IP RATING

IP20 (For indoor use only. Should not be used in wet areas)

### DIMMING

- Phase Cut (Only up to 1200mm diameter)
- 1-10V Volt
- SwitchDIM
- DALI

### CONTROL GEAR


Constant Current dimmable drivers  
Meanwell 1-10V dimmable driver  
One4All DALI constant current driver

### WARRANTY


- 3 Years (standard)
- 5 Years (optional - fees apply)

## MOUNTING OPTIONS:

- Option 1 - Wires Direct to Ceiling

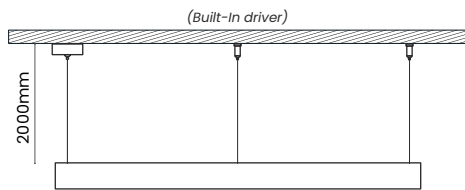

- Option 2 - Rod Suspension

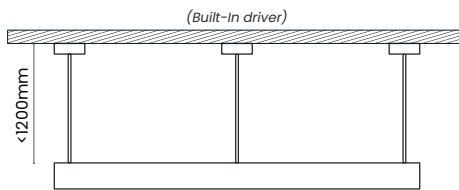

### SUSPENSION LENGTH

Suspension lengths can be specified longer however the standard is;

Wires = 3000mm long (adjustable)  
Rod = 1200mm continuous

- Custom length Please specify,

## Code Generator:

Product	Diameter	Profile Size	Finish	Output	CCT	Mounting	Driver
R60B-T1	450MM - 45	40x60 - 406	Texture Black - BL	1000lm/m - 10W	3000K - 3K	Option 1 - M1	Phase Cut - PC
R60B-T2	600MM - 60	40x80 - 408	Texture White - WH	2000lm/m - 20W	4000K - 4K	Option 2 - M2	1-10 Volt - 110V
	900MM - 90	40x100 - 410	Gold Pearl - GP	3000lm/m - 30W	6500K - 5K		DALI - DA
	1000MM - 100	40x150 - 415	Copper Bronze - CB	4000m/m - 40W	RGB - RGB		SwitchDIM - SwD
	1200MM - 120	60x60 - 606	Dark Bronze - DB	CUSTOM - C/W	RGBW - RGBW		
	1500MM - 150	60x80 - 608	Texture Silver - TS				
	1800MM - 180	60x100 - 610	Brushed Gold - BG				
	2000MM - 200	60x150 - 615	Brushed Nickel - NK				
	2400MM - 240	80x60 - 806	CUSTOM - C/F				
	3000MM - 300	80x80 - 808					
	4000MM - 400	80x100 - 810					
	5000MM - 500	80x150 - 815					
	6000MM - 600	CUSTOM - C/P					
	7000MM - 700						
	CUSTOM - C/D						

DIRECT    IN-DIRECT  
IF APPLICABLE

When specifying custom details e.g. finish and plant type please include the details in the comments section of the online project quote request function on our website or include in the lighting schedule.