


Whisper



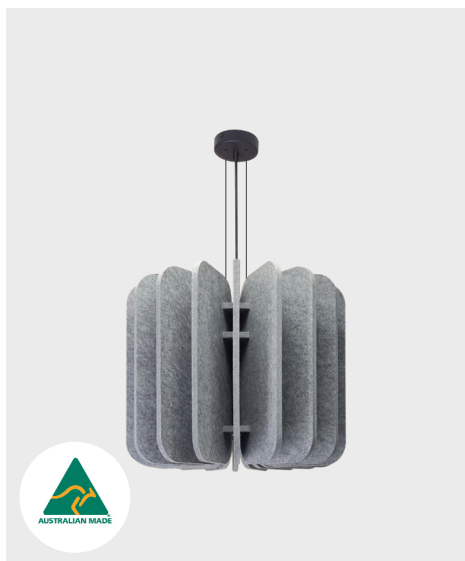


PHYSICAL CHARACTERISTICS:

SIZE OPTIONS:

- 500mm Dia x 400mm H
- Custom Dia x Custom H

MOUNTING:

- Back to Canopy

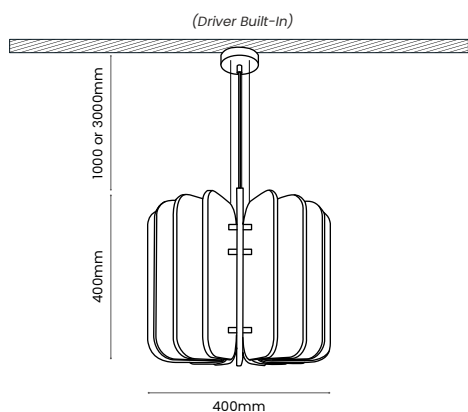

SUSPENSION LENGTH

Suspension lengths can be specified longer however the standard is;
Power = 3000mm long (adjustable)

- Custom length *Please specify,*

FIXTURE WEIGHT:

500mm = 5 Kg

ELECTRICAL CONFIGURATION:

COB LIGHT ENGINE *(Constant Current)*

500mm = 10 Watts | 1200 Lumens

DISTRIBUTION

- Direct light. 60° LEDiL Reflector.

CCT

- 3000K Warm White
- 4000K Cool White

CRI

- CRI >90 (standard)

IP RATING

IP20 (For indoor use only. Should not be used in wet areas)

DIMMING

- Phase Cut
- 1-10V Volt
- SwitchDIM
- DALI

CONTROL GEAR


Tridonic constant current P/C dimmable driver
Tridonic One4All DALI constant current driver

WARRANTY


- 3 Years (standard)
- 5 Years (optional - fees apply)

ACOUSTIC COLOURWAYS:

Light Reflectance Values (LRV), are a measurement of the percentage of visible and usable light that is reflected from a surface when illuminated by a light source.

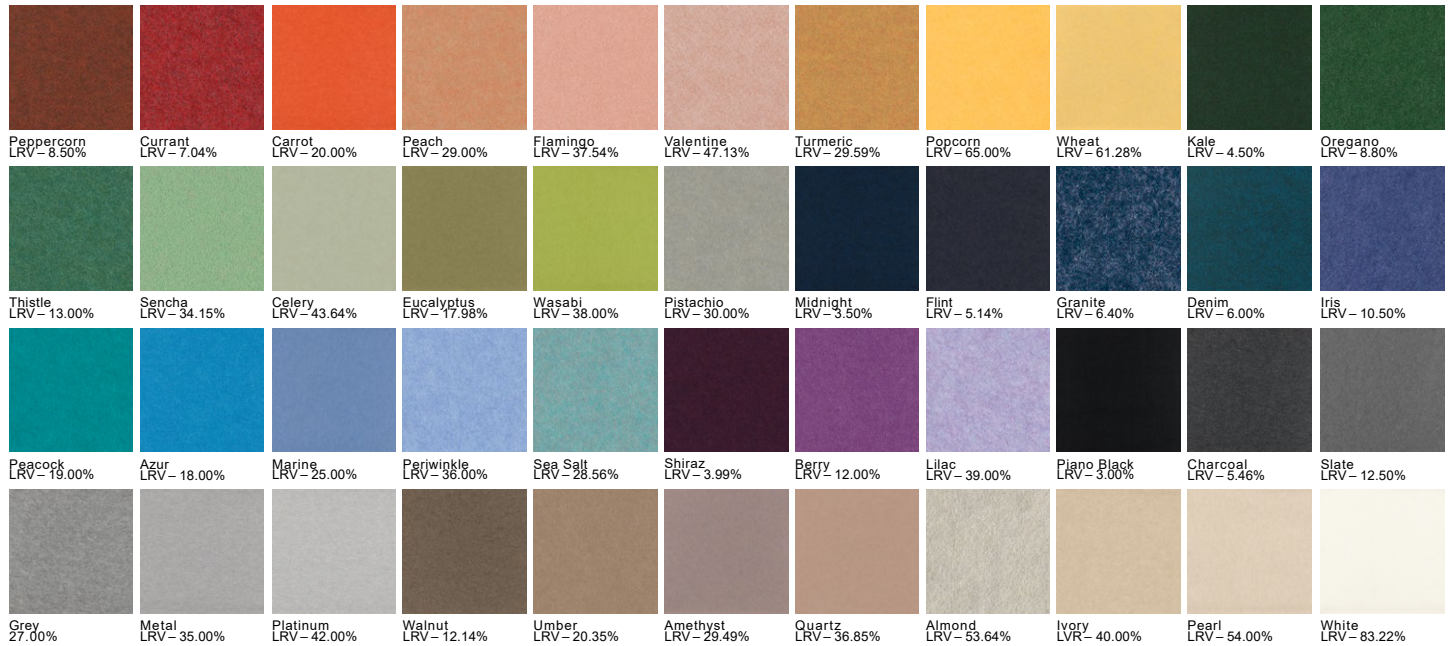

ACOUSTIC PERFORMANCE:

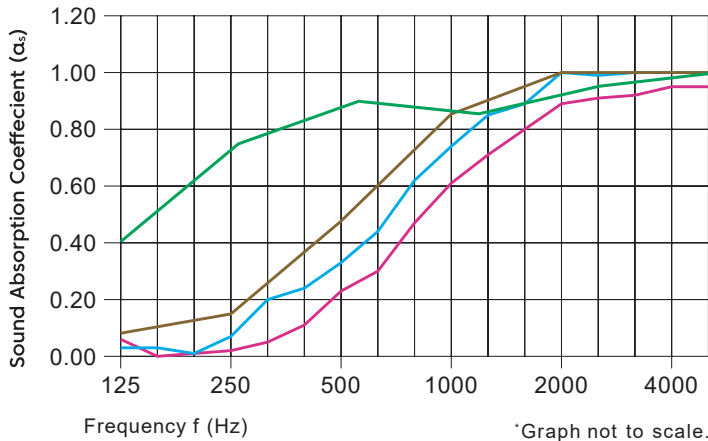

Frequency (Hz)	125	250	500	1000	2000	4000	NRC
α_s no air gap	0.06	0.02	0.23	0.61	0.89	0.95	0.45
α_s 12mm air gap	0.03	0.14	0.33	0.74	1.00	1.00	0.54
α_s 20mm air gap	0.05	0.16	0.48	0.85	1.00	1.00	0.64
α_s 200mm air gap	0.40	0.75	0.90	0.85	0.95	1.00	0.85

Code Generator:

Product	Diameter	Height	Colourway	CCT	Canopy/Cable	Driver
WHISPER	500MM - 50 CUSTOM - CMD	400MM - 40 CUSTOM - CMH	SELECT FROM ABOVE	3000K - 3K 4000K - 4K	WHITE - WH BLACK - BL	Phase Cut - PC DALI - DA SwitchDIM - SwD
AWSP						

When specifying custom details e.g. finish, please include the details in the comments section of the online project quote request function on our website or include in the lighting schedule.