

# Linear 90

*Direct - Indirect*






CONTESSA

LP-2090UD

## Linear 90 *Direct-Indirect*

Custom suspended linear luminaire for interior installation. Continuous lengths from 1000mm to 3000mm then join. Extruded aluminium body, PMMA diffuser. Constant voltage remote driver required. Tridonic LLE flexible module.



### Technical data

Profile:	W20mm x H90mm
Material:	Extruded aluminium + PMMA
IP Rating:	IP20
Light Source:	Tridonic LLE flexible module
Colour Temp:	3000° K Warm white 4000° K Cool white Tunable white (MOQ 10+)
CRI:	CRI80+ (90+ available)
Beam Angle:	110° Direct
Dimming:	Phase-cut (included) SwitchDIM DALI Casambi
Driver:	24V constant voltage
Suspension:	2-in-1 Suspension cables
Warranty:	3 Years (only applies to electrics)
Leadtime:	1-3 Weeks

### Output options

Length (mm)	Standard (lms)	High output (lms)
1200	1160 D, 1160 U	1560 D, 1160 U
1500	1450 D, 1150 U	1960 D, 1450 U
1800	1750 D, 1800 U	2350 D, 1750 U
2000	1940 D, 1940 U	2600 D, 1940 U
2400	2330 D, 2330 U	3130 D, 2330 U
2700	2620 D, 2620 U	3520 D, 2620 U
3000	2900 D, 2900 U	3900 D, 2900 U
Custom	960/m D, 960/m U	1300/m D, 960/m U


### Finish options

 Texture Black	 Texture White	 Texture Silver	 Brushed Brass <i>(Up to 2100mm)</i>
 Gold Pearl	 Copper Bronze	 Dark Bronze	 Custom Finish


COPYRIGHT © 2026  
1300 887 948  
sales@contessalighting.com.au  
contessalighting.com.au

## Mounting options


### M1 - Bullets

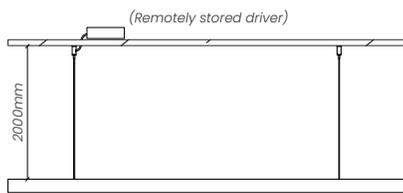


### M2 - Canopies

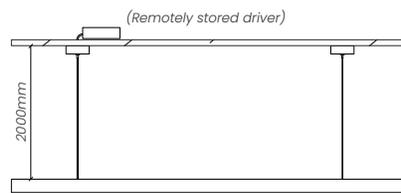


### M3 - Rods

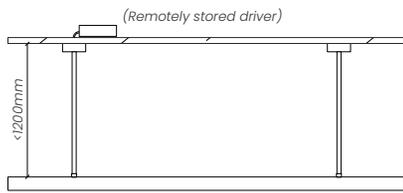

### M4 - Centre Linear Canopy (450x65x41mmH)

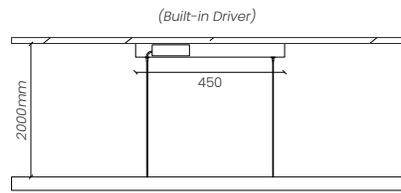


### M5 - Side Linear Canopy (240x65x41mmH)

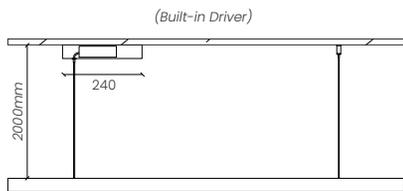

## Canopy options (For option M2 above)


### RC38

(32mm cut-out)




### RC70


(51mm cut-out)



### SC70



### SC100



## Linear 90UD code generator

Product Code	Length	Finish	Output	Colour Temp	Mounting	Canopies (for M2)	Driver						
	1200mm	120	Texture Black	TB	Standard	SO	3000K 3K	Bullets	M1	RC38	R38	Phase Cut	PC
	1500mm	150	Texture White	TW	High Output	HO	4000K 4K	Canopies	M2	RC70	R70	SwitchDim	SwD
	1800mm	180	Texture Silver	TS			Tunable TW	Rods	M3	SC70	S70	DALI	DA
	2000mm	200	Gold Pearl	GP				Centre Canopy	M4	SC100	S100	Casambi	CAS
	2400mm	240	Brushed Brass	BB				Side Canopy	M5	(Leave blank if not required)			
	2700mm	270	Copper Bronze	CB									
	3000mm	300	Dark Bronze	DB									
	Custom	xxx	Custom	xx									

LP-2090UD — — — — — — —

(Example: LP-2090UD-200-CB-HO-4K-MI-PC)

## Suspension placement

Suspension mounts can be specified anywhere along the length of the linear. If the mounting centres are not specified the standard is:

<2000mm length = 200mm from each end  
2100 - 3000mm length = 300mm from each end

If custom placement is required, please specify the required placement before ordering.

## Suspension lengths

The standard suspension lengths are as per the below:

Wire = 2000mm

Rods = Up to 1200mm continuous then join

If custom suspension length is required, please specify the required length before ordering.

## Canopy finishes

All canopies are available in the following finishes:

Texture Black  
Texture White  
Texture Silver  
Gold Pearl  
Copper Bronze  
Dark Bronze

If a canopy finish is not specified, Texture White will be supplied as standard.