

Rhomi-Q











Product Features:

- Custom Made to order
- High quality components
- Available in set sizes or customise
- Black, White, Brass or custom finishes
- Up to 100 lm/W efficacy
- Suspended, surface mounted or recessed
- Use Junctions to create larger shapes
- Up to 6 profile options
- 2700K to 6000K
- Up to 5 year warranty

Physical Characteristics:

Profile Options:



Standard Dimensions:

Small		
Profile Size	Power	Lumens
LP4060	15W	1500 lms
LP6060	30W	3000 lms
LP4080	15W	1500 lms
LP6080	30W	3000 lms
LP50100	20W	2000 lms
LP60100	30W	3000 lms


Medium		
Profile Size	Power	Lumens
LP4060	18W	1800 lms
LP6060		
LP4080	18W	1800 lms
LP6080		
LP50100	18W	1800 lms
LP60100		

Large		
Profile Size	Power	Lumens
LP4060	20W	2000 lms
LP6060	50W	5000 lms
LP4080	20W	2000 lms
LP6080	50W	5000 lms
LP50100	20W	2000 lms
LP60100	50W	5000 lms


Electrical Configuration:

Dimming	CCT	CRI	INPUT
On / Off	2700K	>80 (Standard)	100-277V
DALI	3000K	>90	
SwitchDIM	4000K	>95	
1-10V	6000K		
	RGB		
	RGBW		
	Tunable White		

Finishes:




Mounting Options:

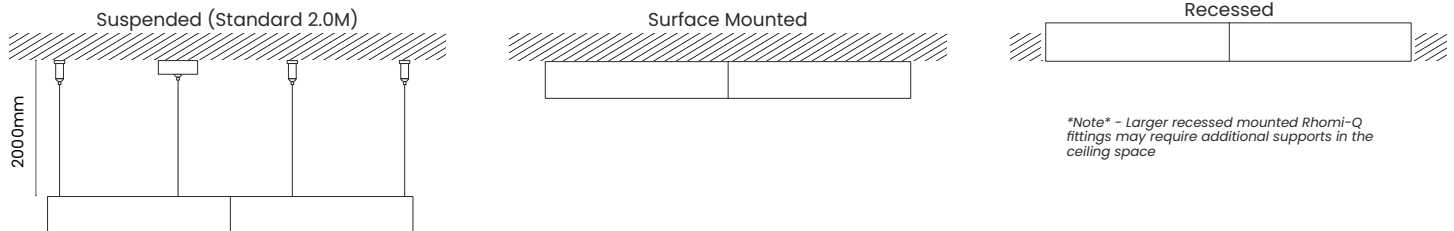

Custom Dimensions:

The Rhomi-Q series pendant dimensions can be customised. For dimensions 1500mm and greater the fitting will be manufactured in parts like the below diagram. Contessa will work with you to manufacture the Rhomi-Q to the nearest size increment that you specify.

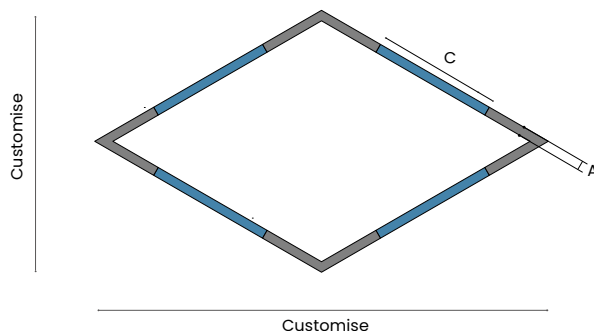

A/mm	B/mm	C/mm
40		Custom
60		
80		
100		

Junctions:



RQ-1



RQ-2



RQ-3



RQ-4



RQ-5



RQ-6



RQ-7







RQ-8



RQ-9

Shape Ideas:

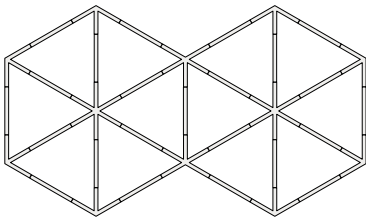

Code Generator:

Product	Profile	Size/mm	Finish	Mounting	CCT	Driver
RHOMI-Q	40x60	Small S	Black BL	Pendant PEN	2700K 2.7	On/Off STA
	60x60	Medium M	White WH	Surface SUR	3000K 3	SwitchD SwD
	40x80	Large L	T/Brass TB	Recessed REC	4000K 4	DALI DALI
	60x80	Custom CM	Custom CM		5000K 5	1-10V 110V
	50x100				RGB R1	
	60x100				RGBW R2	
					Tunable TUN	

When specifying custom details e.g. Size, finish and junctions, please include the details in the comments section of the project quote request function on our website or include in the lighting schedule.