


Tri-Q



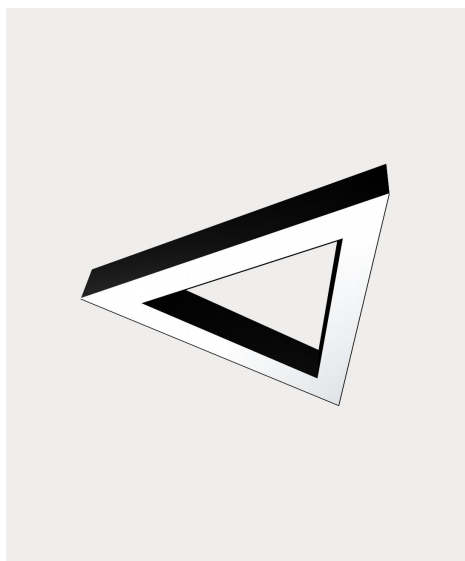

Product Features:

- Custom Made to order
- High quality componentry
- Available in set sizes or customise
- Black, White, Brass or custom finishes
- Up to 100 lm/W efficacy
- Suspended, surface mounted or recessed
- Use Junctions to create larger shapes
- Up to 6 profile options
- 2700K to 6000K
- Up to 5 year warranty
- Shop drawings available






DALI
OPTIONAL

IP20
RATED

5 YR
WARRANTY

Physical Characteristics:

Profile Options:




Standard Dimensions:


600MM		
Profile Size	Power	Lumens
LP4060	13W	1300 lms
LP6060	30W	3000 lms
LP4080	13W	1300 lms
LP6080	30W	3000 lms
LP60100	30W	3000 lms
LP80100		


750MM		
Profile Size	Power	Lumens
LP4060	15W	1500 lms
LP6060		
LP4080	15W	1500 lms
LP6080		
LP60100		
LP80100		

900MM		
Profile Size	Power	Lumens
LP4060	20W	2000 lms
LP6060	50W	5000 lms
LP4080	20W	2000 lms
LP6080	50W	5000 lms
LP60100	50W	5000 lms
LP60100		

Standard Dimensions:


1050MM		
		
Profile Size	Power	Lumens
LP4060	25W	2500 lms
LP6060		
LP4080	25W	2500 lms
LP6080		
LP60100		
LP80100		

1200MM		
		
Profile Size	Power	Lumens
LP4060	30W	3000 lms
LP6060	60W	6000 lms
LP4080	30W	3000 lms
LP6080	60W	6000 lms
LP60100	60W	6000 lms
LP80100		

60° ANGLE SECTION		
		
Profile Size	Power	Lumens
LP4060	4W	400 lms
LP6060	10W	1000 lms
LP4080	4W	400 lms
LP6080	10W	1000 lms
LP60100	7W	700 lms
LP80100	15W	1500 lms

Custom Dimensions:

The Tri-Q series pendant dimensions can be customised. For dimensions 1500mm and greater the fitting will be manufactured in parts like the below diagram. Contessa will work with you to manufacture the Tri-Q to the nearest size increment that you specify.

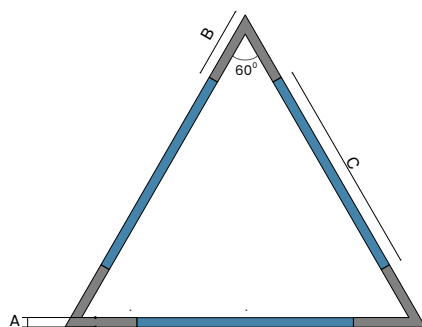

A/mm	B/mm	C/mm
		900
		1000
		1100
		1200
		1300
40	300	1400
60	400	1500
80	(400 only for 80x100)	1600
		1700
		1800
		1900
		2000
		2200
		2400


Electrical Configuration:

Dimming	CCT	CRI	INPUT
On / Off	2700K	>80 (Standard)	100-277V
DALI	3000K	>90	
SwitchDIM	4000K	>95	
1-10V	6000K		
	RGB		
	RGBW		
	Tunable White		

Finishes:



Mounting Options:

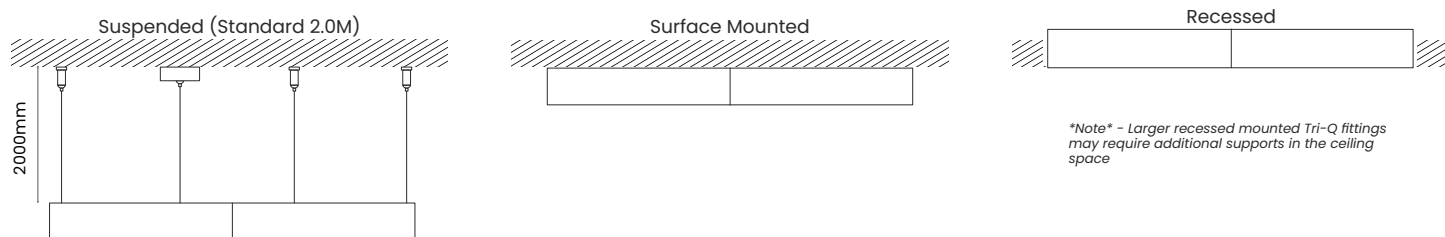

Code Generator:

Product	Profile	Size	Finish	Mounting	CCT	Driver
TRI-Q	40x60	600	Black BL	Pendant PEN	2700K 2.7	On/Off STA
	60x60	750	White WH	Surface SUR	3000K 3	SwitchD SwD
	40x80	900	T/Brass TB	Recessed REC	4000K 4	DALI DALI
	60x80	1050	Custom CM		5000K 5	1-10V 110V
	60x100	1200			RGB R1	
	80x100	Custom			RGBW R2	
					Tunable TUN	

When specifying custom details e.g. size & finish, please include the details in the comments section of the online project quote request function on our website or include in the lighting schedule.